160 LONGWOOD RD HEATHFIELD SA 5153

Address:

Click to view a detailed interactive SAILIS in SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Local Variation (TNV)

Minimum Site Area (Minimum site area is 2,000 sqm)

Overlay

Hazards (Bushfire - High Risk)

Hazards (Flooding - Evidence Required)

Mount Lofty Ranges Water Supply Catchment (Area 2)

Native Vegetation

Prescribed Wells Area

Regulated and Significant Tree

Subzone

Adelaide Hills

Zone

Rural Neighbourhood

Development Pathways

Rural Neighbourhood

1. Accepted Development

Means that the development type does not require planning consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Air handling unit, air conditioning system or exhaust fan
- · Brush fence
- Building work on railway land
- Carport
- Internal building work
- Outbuilding
- · Partial demolition of a building or structure
- · Private bushfire shelter
- Shade sail
- Solar photovoltaic panels (roof mounted)
- Swimming pool or spa pool
- Verandah

Page 1 of 133 Printed on 1/02/2022

- Water tank (above ground)
- · Water tank (underground)

2. Code Assessed - Deemed to Satisfy

Means that the development type requires consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Carport
- · Land division
- Outbuilding
- · Temporary accommodation in an area affected by bushfire
- Verandah

3. Code Assessed - Performance Assessed

Performance Assessed development types listed below are those for which the Code identifies relevant policies. Additional development types that are not listed as Accepted, Deemed to Satisfy or Restricted default to a Performance assessed Pathway. Please contact your local council for more information.

- · Ancillary accommodation
- Carport
- Demolition
- · Detached dwelling
- · Dwelling addition
- Dwelling or residential flat building undertaken by:
 - (a) the South Australian Housing Trust either individually or jointly with other persons or bodies or
 - (b) a provider registered under the Community Housing National Law participating in a program relating to the renewal of housing endorsed by the South Australian Housing Trust.
- Fence
- Land division
- Outbuilding
- · Retaining wall
- Verandah

4. Impact Assessed - Restricted

Means that the development type requires approval. Classes of development that are classified as Restricted are listed in Table 4 of the relevant Zones.

Property Policy Information for above selection

Part 2 - Zones and Sub Zones

Rural Neighbourhood Zone

Assessment Provisions (AP)

Desired Outcome		
	Housing on large allotments in a spacious rural setting, often together with large outbuildings. Easy access and parking for cars. Considerable space for trees and other vegetation around buildings, as well as on-site wastewater treatment where necessary. Limited goods, services and facilities that enhance rather than compromise rural residential amenity.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 2 of 133 Printed on 1/02/2022

Deemed-to-Satisfy Criteria / **Performance Outcome Designated Performance Feature** Land Use and Intensity PO 1.1 DTS/DPF 1.1 Predominantly residential development with complementary ancillary Development comprises one or more of the following: non-residential uses compatible with a spacious and peaceful Ancillary accommodation lifestyle for individual households. (b) Consulting room (c) Detached dwelling (d) Office (e) Outbuilding (f) Pre-school (g) Recreation area (h) Shop PO 1.2 DTS/DPF 1.2 Commercial activities improve community access to services are of A shop, consulting room or office (or any combination thereof) a scale and type to maintain residential amenity. satisfies any one of the following: it is located on the same allotment and in conjunction with a dwelling where all the following are satisfied: (i) does not exceed 50m² gross leasable floor area (ii) does not involve the display of goods in a window or about the dwelling or its curtilage it reinstates a former shop, consulting room or office in an existing building (or portion of a building) and satisfies one of the following: (i) the building is a State or Local Heritage Place is in conjunction with a dwelling and there is no increase in the gross leasable floor area previously used for non-residential purposes. PO 1.3 DTS/DPF 1.3 Non-residential development sited and designed to complement the None are applicable. residential character and amenity of the neighbourhood. PO 1.4 DTS/DPF 1.4 Non-residential development located and designed to improve None are applicable. community accessibility to services, primarily in the form of: small-scale commercial uses such as offices, shops and (a) consulting rooms (b) community services such as educational establishments, community centres, places of worship, pre-schools and other health and welfare services (c) services and facilities ancillary to the function or operation of supported accommodation or retirement facilities (d) open space and recreation facilities. **Building Height**

Page 3 of 133 Printed on 1/02/2022

PO 2.1 DTS/DPF 2.1 Buildings contribute to a low-rise residential character and Building height (excluding garages, carports and outbuildings) is no complement the height of nearby buildings. greater than 2 building levels and 9m and wall height no greater than 7m except in the case of a gable end. Primary Street Setback PO 3.1 DTS/DPF 3.1 Buildings are set back from primary street boundaries consistent The building line of a building set back from the primary street with the existing streetscape. boundary: (a) no more than 1m in front of the average setback to the building line of existing buildings on adjoining sites which face the same primary street (including those buildings that would adjoin the site if not separated by a public road or a vacant allotment) (b) where there is only one existing building on adjoining sites which face the same primary street (including those that would adjoin if not separated by a public road or a vacant allotment), not less than the setback to the building line of that building (c) not less than 8m where no building exists on an adjoining site with the same primary street frontage. Secondary Street Setback PO 4.1 DTS/DPF 4.1 Buildings are set back from secondary street boundaries to Buildings walls are set back at least 2m from the boundary of the maintain a pattern of separation between building walls and public allotment with the secondary street frontage. thoroughfares and reinforce a streetscape character. Side Boundary Setback PO 5.1 DTS/DPF 5.1 Buildings are set back from side boundaries to allow maintenance Building walls are set back from the side boundaries at least 2m. and access around buildings and minimise impacts on adjoining properties. Rear Boundary Setback PO 6.1 DTS/DPF 6.1 Buildings are set back from rear boundaries to provide: Building walls are set back from the rear boundary at least 6m. (a) separation between dwellings in a way that complements the established character of the locality (b) access to natural light and ventilation for neighbours (c) open space recreational opportunities (d) space for landscaping and vegetation. Ancillary Buildings and Structures PO 7.1 DTS/DPF 7.1 Residential ancillary buildings and structures are sited and Ancillary buildings and structures: designed to not detract from the streetscape or appearance of are ancillary to a dwelling erected on the site (a) buildings on the site or neighbouring properties. (b) have a floor area not exceeding (i) 100m² on sites less than 2000m² (ii) 120m² on sites 2000m² or more

Page 4 of 133 Printed on 1/02/2022

- (c) are not constructed, added to or altered so that any part is situated:
 - (i) in front of any part of the building line of the dwelling to which it is ancillary
 - (ii) within 2m of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
 - (iii) within 2m of a side boundary
- (d) in the case of a garage or carport, have a primary street setback that is at least as far back as the dwelling
- (e) in the case of a garage or carport, do not exceed 10m or 50% of the site frontage (whichever is the lesser) when facing a primary street or secondary street
- (f) have a wall height or post height not exceeding 4m above natural ground level
- (g) have a roof height where no part of the roof is more than5m above the natural ground level
- (h) if clad in sheet metal, are pre-colour treated or painted in a non-reflective colour
- (i) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
- (i) a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
<150	10%
150-200	15%
201-450	20%
>450	25%

(ii) the amount of existing soft landscaping prior to the development occurring.

PO 7.2

Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision, car parking requirements and do not result in over-development of the site.

DTS/DPF 7.2

Ancillary buildings and structures do not result in:

- (a) less private open space than specified in Design Table 1 Private Open Space
- (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas to the nearest whole number.

Site Dimensions and Land Division

PO 8.1

Allotments/sites created for residential purposes are consistent with the density and dimensions expressed in any relevant *Minimum*

DTS/DPF 8.1

Development will not result in more than 1 dwelling on an existing allotment

Page 5 of 133 Printed on 1/02/2022

Allotment Size Technical and Numeric Variation or are of suitable size and dimension to contribute to a pattern of development consistent to the locality and suitable for their intended use.

or

Allotments/sites for residential purposes accord with the following:

(a) where allotments/sites are connected to mains sewer or a Community Wastewater Management System site areas (or allotment areas in the case of land division) are not less than:

Minimum Site Area

Minimum site area is 2,000 sqm

- (b) where allotments/sites are not connected to mains sewer or an approved common waste water disposal service site areas are not less than the greater of:
 - (i) 1200m²
 - (ii) the following:

Minimum Site Area

Minimum site area is 2,000 sqm

(c) site frontages are not less than 20m.

In relation to DTS/DPF 8.1, in instances where:

- (d) more than one value is returned in the same field, refer to the Minimum Site Area Technical and Numeric Variation layer in the SA planning database to determine the applicable value relevant to the site of the proposed development
- (e) no value is returned for DTS/DPF 8.1(a) (i.e. there is a blank field), then none are applicable and the relevant development cannot be classified as deemed-to-satisfy
- (f) no value is returned for DTS/DPF 8.1(b)(ii) then the value for DTS/DPF 8.1(b)(ii) is zero.

Concept Plans

PO 9.1

Development is compatible with the outcomes sought by any relevant Concept Plan contained within Part 12 - Concept Plans of the Planning and Design Code to support the orderly development of land through staging of development and provision of infrastructure.

DTS/DPF 9.1

The site of the development is wholly located outside any relevant Concept Plan boundary. The following Concept Plans are relevant:

In relation to DTS/DPF 9.1, in instances where:

- (a) one or more Concept Plan is returned, refer to Part 12 -Concept Plans in the Planning and Design Code to determine if a Concept Plan is relevant to the site of the proposed development. Note: multiple concept plans may be relevant.
- (b) in instances where 'no value' is returned, there is no relevant concept plan and DTS/DPF 9.1 is met.

Advertisements

PO 10.1

Advertisements identify the associated business activity, and do not detract from the residential character of the locality.

DTS/DPF 10.1

Advertisements relating to a lawful business activity associated with a residential use do not exceed 0.3m2 and mounted flush with a wall or fence.

Page 6 of 133 Printed on 1/02/2022

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

A class of development listed in Column A is excluded from notification provided that it does not fall within a corresponding exclusion prescribed in Column B. In instances where development falls within multiple classes within Column A, each clause is to be read independently such that if a development is excluded from notification by any clause, it is, for the purposes of notification excluded irrespective of any other clause.

Class c	of Develo	pment	Exceptions
(Colum	nn A)		(Column B)
1.	relevan unreaso	of development which, in the opinion of the tauthority, is of a minor nature only and will not conably impact on the owners or occupiers of land ocality of the site of the development.	None specified.
2.	(a)	the South Australian Housing Trust either individually or jointly with other persons or bodies or a provider registered under the Community Housing National Law participating in a program relating to the renewal of housing endorsed by the South Australian Housing Trust.	 residential flat building(s) of 3 storeys or greater the demolition of a State or Local Heritage Place the demolition of a building (except an ancillary building) in a Historic Area Overlay.
3.	combin	building work on railway land carport deck detached dwelling dwelling addition fence outbuilding pergola private bushfire shelter retaining wall	Except development that does not satisfy Rural Neighbourhood Zone DTS/DPF 2.1.
4.		relopment involving any of the following (or of any ation of any of the following):	Except development that does not satisfy any of the following:

Page 7 of 133 Printed on 1/02/2022

olicy24 - Lilquii y		
(a) (b) (c)	consulting room office shop.	 Rural Neighbourhood Zone DTS/DPF 1.2 Rural Neighbourhood Zone DTS/DPF 2.1.
(a) (b) (c) (d) (e)	elopment involving any of the following (or of any ation of any of the following): internal building works land division recreation area replacement building temporary accommodation in an area affected by bushfire tree damaging activity.	None specified.
6. Demoliti	on.	 Except any of the following: the demolition of a State or Local Heritage Place the demolition of a building (except an ancillary building) in a Historic Area Overlay.
Placement of No	otices - Exemptions for Performance Assessed	Development

None specified.

Placement of Notices - Exemptions for Restricted Development

None specified.

Adelaide Hills Subzone

Assessment Provisions (AP)

Desired Outcome		
DO 1	Additional residential and tourist accommodation that retains and embraces the values of the established mature vegetation as a defining characteristic of the area.	
DO 2	Land division is sympathetic to the allotment pattern and characteristics within the locality.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Us	se and Intensity
PO 1.1	DTS/DPF 1.1
A limited additional range of accommodation options that	Development comprises one or more of the land uses listed, in

Page 8 of 133 Printed on 1/02/2022

complement the prevailing residential character.	addition to those listed in Rural Neighbourhood Zone DTS 1.1:	
	(a) Supported accommodation (b) Tourist accommodation.	
Site Dimensions	and Land Division	
PO 2.1	DTS/DPF 2.1	
Allotments/sites created for residential purposes are consistent with the established pattern of division surrounding the development site to maintain local character and amenity.	Development satisfies (a) or (b): (a) it will not result in more than 1 dwelling on an existing allotment (b) allotments/sites have an area the greater of the following (excluding the area within the access 'handle' if in the form of a battle-axe development): (i) 2000m² (ii) the median allotment size of all residential allotments in the Adelaide Hills Subzone either wholly or partly within a radius of 200m measured from the centre of the main allotment frontage.	
PO 2.2 Allotments/sites are sized and configured maximise the retention of mature vegetation to maintain landscape amenity.	DTS/DPF 2.2 None are applicable.	

Part 3 - Overlays

Hazards (Bushfire - High Risk) Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development, including land division is sited and designed to minimise the threat and impact of bushfires on life and property with regard to the following risks:
	(a) potential for uncontrolled bushfire events taking into account the increased frequency and intensity of bushfires as a result of climate change
	(b) high levels and exposure to ember attack
	(c) impact from burning debris
	(d) radiant heat
	(e) likelihood and direct exposure to flames from a fire front.
DO 2	Activities that increase the number of people living and working in the area or where evacuation would be difficult is sited away from areas of unacceptable bushfire risk.
DO 3	To facilitate access for emergency service vehicles to aid the protection of lives and assets from bushfire danger.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 9 of 133 Printed on 1/02/2022

Deemed-to-Satisfy Criteria / **Performance Outcome Designated Performance Feature** Land Use DTS/DPF 1.1 PO 1.1 Development that significantly increases the potential for fire None are applicable. outbreak as a result of the spontaneous combustion of materials, spark generation or through the magnification and reflection of light is not located in areas of unacceptable bushfire risk. PO 1.2 DTS/DPF 1.2 Pre-schools, educational establishments, hospitals, retirement and None are applicable. supported accommodation are sited away from areas of unacceptable bushfire risk and locations that: (a) are remote from or require extended periods of travel to reach safer locations (b) don't have a safe path of travel to safer locations. Siting PO 2.1 DTS/DPF 2.1 Buildings and structures are located away from areas that pose an None are applicable. unacceptable bushfire risk as a result of vegetation cover and type, and terrain. **Built Form** PO 3.1 DTS/DPF 3.1 Buildings and structures are designed and configured to reduce the None are applicable. impact of bushfire through using designs that reduce the potential for trapping burning debris against or underneath the building or structure, or between the ground and building floor level in the case of transportable buildings and buildings on stilts. PO 3.2 DTS/DPF 3.2 Extensions to buildings, outbuildings and other ancillary structures Outbuildings and other ancillary structures are sited no closer than are sited and constructed using materials to minimise the threat of 6m from the habitable building. fire spread to residential and tourist accommodation (including boarding houses, hostels, dormitory style accommodation, student accommodation and Workers' accommodation) in the event of bushfire. Habitable Buildings PO 4.1 DTS/DPF 4.1

accommodation and workers' accommodation) is sited on the flatter

None are applicable.

on life and property, residential and tourist accommodation and habitable buildings for vulnerable communities (including boarding houses, hostels, dormitory style accommodation, student portion of allotments away from steep slopes.

To minimise the threat, impact and potential exposure to bushfires

Page 10 of 133 Printed on 1/02/2022

PO 4.2 DTS/DPF 4.2 Residential and tourist accommodation and habitable buildings for Residential and tourist accommodation and habitable buildings for vulnerable communities (including boarding houses, hostels, vulnerable communities are provided with asset protection zone(s) dormitory style accommodation, student accommodation and in accordance with (a) and (b): workers' accommodation) is sited away from vegetated areas that the asset protection zone has a minimum width of at least: (a) pose an unacceptable bushfire risk. 50 metres to unmanaged grasslands (ii) 100 metres to hazardous bushland vegetation (b) the asset protection zone is contained wholly within the allotment of the development. PO 4.3 DTS/DPF 4.3 Residential and tourist accommodation and habitable buildings for None are applicable. vulnerable communities (including boarding houses, hostels, dormitory style accommodation, student accommodation and workers' accommodation) has a dedicated area available that: is capable of accommodating a bushfire protection system comprising firefighting equipment and water supply in accordance with Ministerial Building Standard MBS 008 -Designated bushfire prone areas - additional requirements (b) includes the provision of an all-weather hardstand area in a location that: allows fire-fighting vehicles to safely access the dedicated water supply and exit the site in a forward direction (ii) is no further than 6 metres from the dedicated water supply outlet(s) where required. Land Division PO 5.1 DTS/DPF 5.1 Land division for residential and tourist accommodation and None are applicable. habitable buildings for vulnerable communities (including boarding houses, hostels, dormitory style accommodation, student accommodation and workers' accommodation) is limited to those areas specifically set aside for these uses. PO 5.2 DTS/DPF 5.2 Land division is designed and incorporates measures to minimise None are applicable. the danger of fire hazard to residents and occupants of buildings, and to protect buildings and property from physical damage in the event of a bushfire. PO 5.3 DTS/DPF 5.3 Land division is designed to provide a continuous street pattern None are applicable. (avoiding the use of dead end roads/cul-de-sac road design) to facilitate the safe movement and evacuation of emergency vehicles, residents, occupants and visitors. Where cul-de-sac / dead end roads are proposed, an alternative emergency evacuation route is provided. PO 5.4 DTS/DPF 5.4

Page 11 of 133 Printed on 1/02/2022

None are applicable.

Where 10 or more new allotments are proposed, land division

includes at least two separate and safe exit points to enable multiple avenues of evacuation in the event of a bushfire.			
PO 5.5	DTS/DPF 5.5		
Land division provides sufficient space for future asset protection zones and incorporates perimeter roads of adequate design in conjunction with bushfire buffer zones to achieve adequate separation between residential allotments and areas of unacceptable bushfire risk and to support safe access for the purposes of fire-fighting.	None are applicable.		
Vehicle Access –Roads,	Driveways and Fire Tracks		
PO 6.1	DTS/DPF 6.1		
Roads are designed and constructed to facilitate the safe and effective:	Roads:		
(a) access operation and evacuation of fire fighting vehicles	(a) are constructed with a formed, all-weather surface		
(a) access, operation and evacuation of fire-fighting vehicles and emergency personnel	(b) have a gradient of not more than 16 degrees (1-in-3.5) at any point along the road		
(b) evacuation of residents, occupants and visitors.	(c) have a cross fall of not more than 6 degrees (1-in-9.5) at any point along the road		
	(d) have a minimum formed road width of 6m		
	 (e) provide overhead clearance of not less than 4.0m between the road surface and overhanging branches or other obstructions including buildings and/or structures (Figure 1) 		
	(f) allow fire-fighting services (personnel and vehicles) to travel in a continuous forward movement around road curves by constructing the curves with a minimum external radius of 12.5m (Figure 2)		
	(g) incorporating cul-de-sac endings or dead end roads are provided within an alternative evacuation route and do not exceed 200m in length and the end of the road has either:		
	(i) a turning area with a minimum formed surface radius of 12.5m (Figure 3) or		
	(ii) a 'T' or 'Y' shaped turning area with a minimum formed surface length of 11m and minimum internal radii of 9.5m (Figure 4)		
	 (h) incorporate solid, all-weather crossings over any watercourse that support fire-fighting vehicles with a gross vehicle mass (GVM) of 21 tonnes. 		
PO 6.2	DTS/DPF 6.2		
Access to habitable buildings is designed and constructed to facilitate the safe and effective:	Access is in accordance with (a) or (b):		
(a) use, operation and evacuation of fire-fighting and emergency personnel (b) evacuation of residents, occupants and visitors.	 (a) a clear and unobstructed vehicle or pedestrian pathway of not greater than 60 metres in length is available between the most distant part of the habitable building and the nearest part of a formed public access road (b) driveways: (i) do not exceed 600m in length (ii) are constructed with a formed, all-weather surface (iii) are connected to a formed, all-weather public road with the transition area between the road 		

Page 12 of 133 Printed on 1/02/2022

	(iv)	have a gradient of not more than 16 degrees (1-in-3.5) at any point along the driveway
	(v)	have a crossfall of not more than 6 degrees (1-in-9.5) at any point along the driveway
	(vi)	have a minimum formed width of 3m (4m where the gradient of the driveway is steeper than 12 degrees (1-in-4.5)) plus 0.5 metres clearance either side of the driveway from overhanging branches or other obstructions, including buildings and/or structures (Figure 1)
	(vii)	incorporate passing bays with a minimum width of 6m and length of 17m every 200m (Figure 5)
	(viii)	provide overhead clearance of not less than 4.0m between the driveway surface and overhanging branches or other obstructions, including buildings and/or structures (Figure 1)
	(ix)	allow fire-fighting services (personnel and vehicles) to travel in a continuous forward movement around driveway curves by constructing the curves with a minimum external radius of 12.5m (Figure 2)
	(x)	allow fire-fighting vehicles to safely enter and exit an allotment in a forward direction by using a 'U' shaped drive through design or by incorporating at the end of the driveway either:
		A. a loop road around the building or
		B. a turning area with a minimum radius of 12.5m (Figure 3) or
		C. a 'T' or 'Y' shaped turning area with a minimum formed length of 11m and minimum internal radii of 9.5m (Figure 4)
	(xi)	incorporate solid, all-weather crossings over any watercourse that support fire-fighting vehicles with a gross vehicle mass (GVM) of 21 tonnes.
PO 6.3	DTS/DPF 6.3	
Development does not rely on fire tracks as means of evacuation or access for fire-fighting purposes unless there are no safe alternatives available.	None are applic	cable.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except if a <i>relevant certificate</i> accompanies the application for planning consent in respect of the development, any of the following classes of development	South Australian Country Fire Service.	To provide expert assessment and direction to the relevant	Development of a class to which Schedule 9

Page 13 of 133 Printed on 1/02/2022

clause 3 item (including alterations and additions which increase the authority on the 2 of the floor area of such buildings by 10% or more): potential impacts of Planning, bushfire on the Development land division creating one or more additional development. and allotments Infrastructure (b) dwelling (General) (c) ancillary accommodation Regulations 2017 applies. (d) residential flat building tourist accommodation (e) (f) boarding home (g) dormitory style accommodation (h) workers' accommodation (i) student accommodation (j) pre-school (k) educational establishment (l) retirement village (m) supported accommodation (n) residential park (o) hospital camp ground.

Figures and Diagrams

(p)

Fire Appliance Clearances Figure 1 - Overhead and Side Clearances MINIMUM 4 METRES OVERHEAD CLEARANCE **CLEARANCE** 0.5m CARRIAGEWAY WIDTH 0.5m (3m Minimum for Driveways) A MINIMUM 0.5 METRES (6m Minimum for Roads) CLEARANCE IS TO BE PROVIDED ON EACH SIDE OF CARRIAGEWAY / DRIVEWAY

Page 14 of 133 Printed on 1/02/2022

Roads and Driveway Design

Figure 2 - Road and Driveway Curves

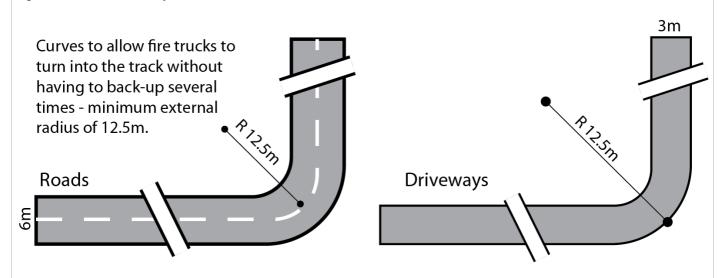


Figure 3 - Full Circle Turning Area


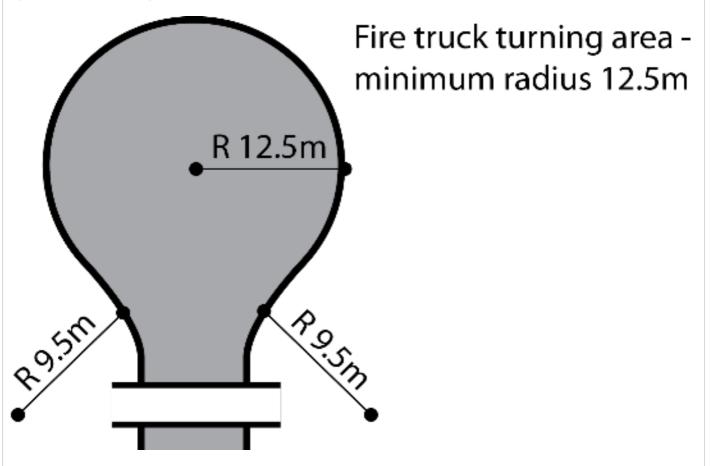



Figure 4 - 'T' or 'Y' Shaped Turning Head

Page 15 of 133 Printed on 1/02/2022

Figure 5 - Driveway Passing Bays

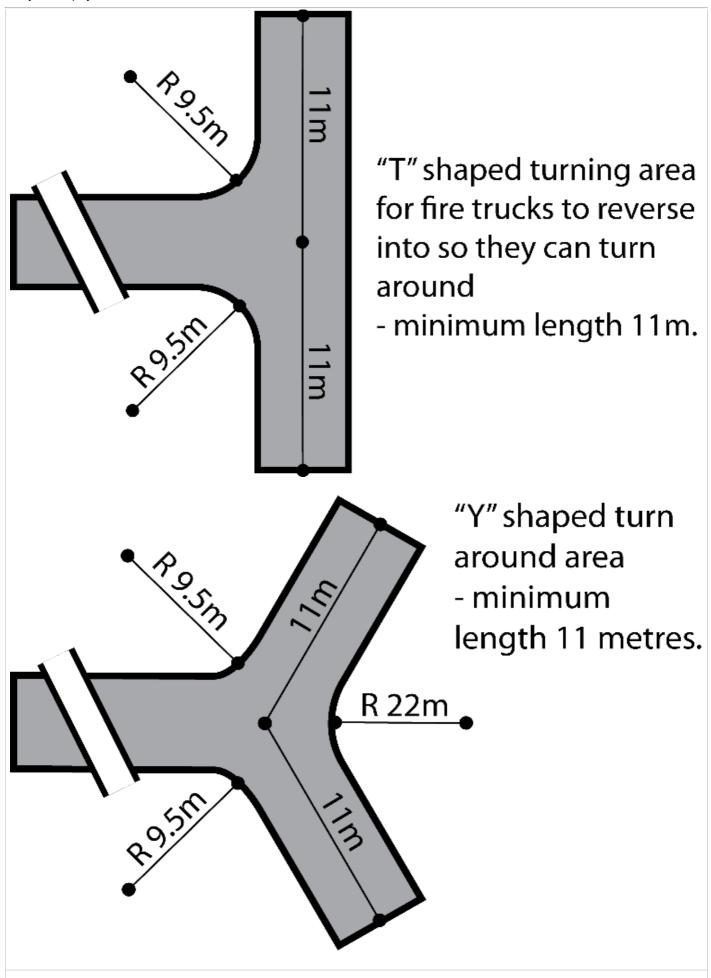

Page 16 of 133 Printed on 1/02/2022

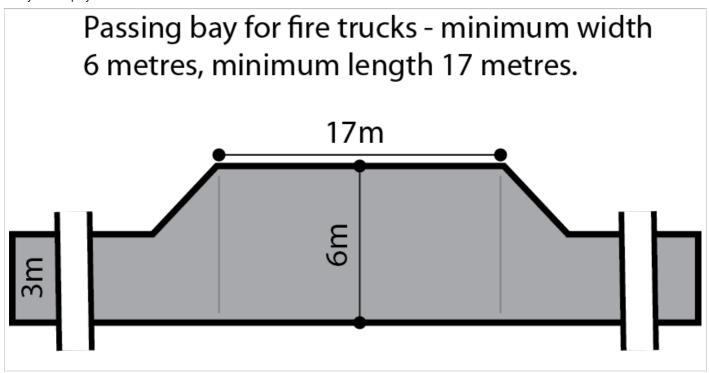

Hazards (Flooding - Evidence Required) Overlay

Assessment Provisions (AP)

Desired Outcome	
DO 1 Development adopts a precautionary approach to mitigate potential impacts on people, property, infrastructure and the	
	environment from potential flood risk through the appropriate siting and design of development.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Flood R	esilience
PO 1.1 Development is sited, designed and constructed to minimise the risk of entry of potential floodwaters where the entry of flood waters is likely to result in undue damage to or compromise ongoing activities within buildings.	DTS/DPF 1.1 Habitable buildings, commercial and industrial buildings, and buildings used for animal keeping incorporate a finished floor level at least 300mm above: (a) the highest point of top of kerb of the primary street or (b) the highest point of natural ground level at the primary street boundary where there is no kerb
Environment	al Protection
PO 2.1 Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building.	DTS/DPF 2.1 Development does not involve the storage of hazardous materials.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets

Page 17 of 133 Printed on 1/02/2022

out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Mount Lofty Ranges Water Supply Catchment (Area 1) Overlay

Assessment Provisions (AP)

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

	Pe	rformance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
		Storm	nwater
DTS/DP	PF 3.4		DTS/DPF 3.5
Develo	pment in	cludes:	Dwelling additions are connected to a rainwater tank with a minimum capacity of 1,000L.
	(a)	rainwater tanks with a minimum capacity of 1,000L connected to carports, verandahs and outbuildings or	
	(b)	rainwater tanks with a minimum capacity of 4,500L connected to agricultural buildings exceeding 100m ² .	
DTS/DP	PF 3.9		
Excava	ation and	/or filling satisfy all the following:	
(a)	is loca	ted 50m or more from watercourses	
(b)		ted 100m or more from public water supply oirs and diversion weirs	
(c)	does n 0.75m	not involve excavation exceeding a vertical height of	
(d)	does n	not involve filling exceeding a vertical height of 0.75m	
(e)		not involve a total combined excavation and filling Il height of 1.5m.	

Mount Lofty Ranges Water Supply Catchment (Area 2) Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Safeguard Greater Adelaide's public water supply by ensuring development has a neutral or beneficial effect on the quality of water harvested from secondary reservoirs or diversion weir catchments from the Mount Lofty Ranges.

Page 18 of 133 Printed on 1/02/2022

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Water	Quality
PO 1.1	DTS/DPF 1.1
Development results in a neutral or beneficial effect on the quality of water draining from the site to maintain and enhance the role of the catchment as a water supply.	None are applicable.
PO 1.2	DTS/DPF 1.2
Development does not include land uses that have the potential to cause adverse impacts on the quality of water draining into secondary public water supply reservoirs and weirs.	Development does not involve any one or combination of the following: (a) landfill (b) special industry.
Wast	ewater
PO 2.1	DTS/DPF 2.1
Development that generates human wastewater, including alterations and additions, are established at an intensity and in a manner to minimise potential adverse impact on water quality within secondary reservoir and weir catchment areas.	Development including alterations and additions, in combination with existing built form and activities within an allotment: (a) do not generate a combined total of more than 1500 litres of wastewater per day and (b) will be connected to the same on-site wastewater system that is compliant with relevant South Australian standards
	or is otherwise connected to a sewer or community wastewater management system.
PO 2.2	DTS/DPF 2.2
Dairy development is of a scale and design that will avoid adverse water quality impacts.	Dairy development satisfies all of the following:
	 (a) is located at least 100 metres from any watercourse, dam, bore or well (b) is connected to a wastewater management system that is located 200 metres from any watercourse, dam, bore or well and is designed and constructed to avoid leakage to groundwater or overflow under extreme rainfall conditions (c) treated wastewater irrigation areas: (i) have a slope of less than 1-in-5 (20 percent) (ii) are greater than 100 metres from any watercourse, dam, bore or well are suitable to provide for seasonal wastewater irrigation without causing pollution of surface or groundwater.
PO 2.3	DTS/DPF 2.3
Development that generates trade or industrial wastewater is of a	Development that generates trade or industrial wastewater with a

Page 19 of 133 Printed on 1/02/2022

scale and design to ensure wastewater is managed to avoid adverse peak biological oxygen demand (BOD) of greater than 100 water quality impacts is of a scale and design that will avoid adverse milligrams per litre satisfies the following: water quality impacts. disposes of all wastewater to a sewerage or community wastewater management system, (b) operates at a scale that generates less than 5 million litres of wastewater per year, and is located greater than 300 metres from a watercourse, dam, bore or well, except where a spill retention basin is constructed, in which case, the minimum setback to a watercourse, dam, bore or well is 50 metres, and (ii) a development that incorporates a spill retention basin(s) for the purpose of reducing the setback to a watercourse, dam, bore or well, has basins designed and located: A. to minimise the risk of spills entering a downgradient watercourse, dam, bore of В. in close proximity to wine making, wine storage and wastewater treatment facilities C. to capture 120% of the maximum aggregate volume of liquid raw materials, product and untreated wastewater which can be contained or produced at any one time during the peak of operation D. to be impervious; and to minimise the interception of any natural or artificial stormwater flow. PO 2.4 DTS/DPF 2.4 Wastewater management systems result in a neutral or beneficial Development results in: effect on the quality of water draining from the site. a building or land use that is currently connected to an existing on-site wastewater system that is non-compliant with relevant South Australian standards being connected to a new or upgraded system that complies with such standards (b) an existing on-site wastewater system being decommissioned and wastewater being disposed of to a sewer or community wastewater management system that complies with relevant South Australian standards. PO 2.5 DTS/DPF 2.5 All components of an effluent disposal area are: Surface and groundwater protected from wastewater discharge pollution. (a) setback 50 metres or more from a watercourse (b) setback 100 metres of more from a public water supply reservoir (c) located on land with a slope no greater than 1-in-5 (20%) located on land with 1.2m or more depth to bedrock or a seasonal or permanent water table (e) above the 10% AEP flood level. Stormwater DTS/DPF 3.1 PO 3.1

Page 20 of 133 Printed on 1/02/2022

, , ,		
Post-development peak stormwater discharge quantities and rates do not exceed pre-development quantities and rates to maintain water quality leaving the site.	None are applicable.	
PO 3.2	DTS/DPF 3.2	
Stormwater run-off from areas not likely to be subject to pollution diverted away from areas that could cause pollution.	None are applicable.	
PO 3.3	DTS/DPF 3.3	
Polluted stormwater is treated prior to discharge from the site.	None are applicable.	
PO 3.4	DTS/DPF 3.4	
Stormwater from carports, verandahs, outbuildings and agricultural buildings captured to protect water quality.	Development includes:	
	(a) rainwater tanks with a minimum capacity of 1,000L connected to carports, verandahs and outbuildings or	
	(b) rainwater tanks with a minimum capacity of 4,500L connected to agricultural buildings exceeding 100m ² .	
PO 3.5	DTS/DPF 3.5	
Stormwater from dwelling additions captured to protect water quality.	Dwelling additions are connected to a rainwater tank with a minimum capacity of 1,000L.	
PO 3.6	DTS/DPF 3.6	
Stormwater from shops and tourist accommodation is managed to protect water quality.	Shops and tourist accommodation satisfy all the following:	
protect water quality.	(a) are located 50m or more from watercourses, wetlands, land prone to waterlogging and bores	
	(b) are located 100m or more from public water supply reservoirs and diversion weirs	
	(c) are located on land with a slope not exceeding 20%	
	(d) includes buildings connected to rainwater tanks with a minimum capacity of 1,000L	
	(e) includes swales that divert clean stormwater away from areas where it could be polluted.	
PO 3.7	DTS/DPF 3.7	
Stormwater from horse keeping and low intensity animal husbandry is managed to protect water quality.	Horse keeping and low intensity animal husbandry satisfy all the following:	
	(a) is located 50m or more from watercourses, wetlands, land prone to waterlogging and bores	
	(b) is located on land with a slope not exceeding 10%	
	(c) includes stables, shelters or other roofed structures connected to rainwater tanks with a minimum capacity of 1,000L	
	(d) includes swales that divert clean stormwater away from areas (including yards, manure storage areas, and watering points) within which it could be polluted.	
PO 3.8	DTS/DPF 3.8	
Stormwater from horticulture is managed to protect water quality.	Horticulture satisfies all the following:	
	(a) is located 50m or more from watercourses, wetlands, land	

Page 21 of 133 Printed on 1/02/2022

Policy24 - Enquiry	
	prone to waterlogging and bores
	(b) is located 100m or more from public water supply reservoirs and diversion weirs
	(c) is located on land with a slope not exceeding 10%
	(d) includes swales or other structures that divert clean stormwater away from areas (including plant growing areas, chemical storage areas and plant waste storage areas) within which it could be polluted.
PO 3.9	DTS/DPF 3.9
Stormwater from excavated and filled areas is managed to protect water quality.	Excavation and/or filling satisfy all the following:
	(a) is located 50m or more from watercourses
	(b) is located 100m or more from public water supply reservoirs and diversion weirs
	(c) does not involve excavation exceeding a vertical height of 0.75m
	(d) does not involve filling exceeding a vertical height of 0.75m
	(e) does not involve a total combined excavation and filling vertical height of 1.5m.
Landscapes and	Natural Features
PO 4.1 DTS/DPF 4.1	
Development minimises the need to modify landscapes and natural features.	None are applicable.
Land I	Division
PO 5.1	DTS/DPF 5.1
Land division does not result in an increased risk of pollution to surface or underground water.	Land division does not create additional allotments and satisfies (a) and/or (b):
	 (a) is for realignment of allotment boundaries to correct an anomaly in the placement of those boundaries with respect to the location of existing buildings or structures or (b) is for realignment of allotment boundaries in order to improve management of the land for primary production and/or conservation of natural features.
PO 5.2	DTS/DPF 5.2
Realignment of allotment boundaries does not create development potential for a dwelling and associated onsite wastewater management system where no such potential currently exists.	None are applicable.

Procedural Matters (PM)

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Any of the following classes of development that are	Environment Protection	To provide expert technical	Development

Page 22 of 133 Printed on 1/02/2022

not connected (or not proposed to be connected) to a community wastewater management system or sewerage infrastructure:

- (a) land division creating one or more additional allotments, either partly or wholly within the area of the overlay
- (b) function centre with more than 75 seats for customer dining purposes
- (c) restaurant with more than 40 seats for customer dining purposes
- (d) restaurant with more than 30 seats for customer dining purposes in association with a cellar door
- (e) dwelling where a habitable dwelling or tourist accommodation already exists on the same allotment (including where a valid planning authorisation exists to erect a dwelling or tourist accommodation on the same allotment)
- (f) tourist accommodation where a habitable dwelling or tourist accommodation already exists on the same allotment (including where a valid planning authorisation exists to erect a habitable dwelling or tourist accommodation on the same allotment)
- (g) workers' accommodation where a habitable dwelling or tourist accommodation already exists on the same allotment (including where a valid planning authorisation exists to erect a habitable dwelling or tourist accommodation on the same allotment)
- (h) any other development that generates human wastewater from a peak loading capacity of more than 40 persons (or more than 6,000 litres/day)

Composting works (excluding a prescribed approved activity) - being a depot, facility or works with the capacity to treat, during a 12 month period more than 200 tonnes of organic waste or matter (EPA Licence)

Wastewater treatment works - being sewage treatment works, a community wastewater management system, winery wastewater treatment works or any other wastewater treatment works with the capacity to treat, during a 12 month period more than 2.5 ML of wastewater (EPA Licence required at more than 5ML)

Feedlots - being carrying on an operation for holding in confined yard or area and feeding principally by mechanical means or by hand not less than an average of 200 cattle (EPA Licence) or 1,600 sheep or goats per day over any period of 12 months, but excluding any such operation carried on at an abattoir, slaughterhouse or saleyard or for the purpose only of drought or other emergency feeding

Authority.

assessment and direction to the relevant authority on whether a proposed development will have a neutral or beneficial impact on water quality.

of a class to which Schedule 9 clause 3 item 9 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Page 23 of 133 Printed on 1/02/2022

Piggeries - being the conduct of a piggery (being premises having confined or roofed structures for keeping pigs) with a capacity of 130 or more standard pig units (EPA Licence required at 650 or more standard pig units)

Dairies - carrying on of a dairy with a total processing capacity exceeding 100 milking animals at any one time.

Native Vegetation Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Areas of native vegetation are protected, retained and restored in order to sustain biodiversity, threatened species and vegetation communities, fauna habitat, ecosystem services, carbon storage and amenity values.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome

Deemed-to-Satisfy Criteria / Designated Performance Feature

Environmental Protection

PO 1.1

Development avoids, or where it cannot be practically avoided, minimises the clearance of native vegetation taking into account the siting of buildings, access points, bushfire protection measures and building maintenance.

DTS/DPF 1.1

An application is accompanied by:

- (a) a declaration stating that the proposal will not, or would not, involve clearance of native vegetation under the Native Vegetation Act 1991, including any clearance that may occur:
 - (i) in connection with a relevant access point and / or driveway
 - (ii) within 10m of a building (other than a residential building or tourist accommodation)
 - (iii) within 20m of a dwelling or addition to an existing dwelling for fire prevention and control
 - (iv) within 50m of residential or tourist accommodation in connection with a requirement under a relevant overlay to establish an asset protection zone in a bushfire prone area

or

(b) a report prepared in accordance with Regulation 18(2)(a)

Page 24 of 133 Printed on 1/02/2022

	of the Native Vegetation Regulations 2017 that establishes that the clearance is categorised as 'Level 1 clearance'.
PO 1.2	DTS/DPF 1.2
Native vegetation clearance in association with development avoids the following:	None are applicable.
 (a) significant wildlife habitat and movement corridors (b) rare, vulnerable or endangered plants species (c) native vegetation that is significant because it is located in an area which has been extensively cleared (d) native vegetation that is growing in, or in association with, a wetland environment. 	DTS/DPF 1.3
Intensive animal husbandry and agricultural activities are sited, set back and designed to minimise impacts on native vegetation, including impacts on native vegetation in an adjacent State Significant Native Vegetation Area, from: (a) the spread of pest plants and phytophthora (b) the spread of non-indigenous plants species (c) excessive nutrient loading of the soil or loading arising from surface water runoff	Development within 500 metres of a boundary of a State Significan Native Vegetation Area does not involve any of the following: (a) horticulture (b) intensive animal husbandry (c) dairy (d) commercial forestry (e) aquaculture.
(d) soil compaction (e) chemical spray drift.	
PO 1.4 Development restores and enhances biodiversity and habitat values through revegetation using locally indigenous plant species.	DTS/DPF 1.4 None are applicable.
Land	division
Land division does not result in the fragmentation of land containing native vegetation, or necessitate the clearance of native vegetation, unless such clearance is considered minor, taking into account the location of allotment boundaries, access ways, fire breaks, boundary fencing and potential building siting or the like.	Land division where: (a) an application is accompanied by one of the following: (i) a declaration stating that none of the allotments in the proposed plan of division contain native vegetation under the Native Vegetation Act 1991 (ii) a declaration stating that no native vegetation clearance under the Native Vegetation Act 1991 will be required as a result of the division of land (iii) a report prepared in accordance with Regulation 18(2)(a) of the Native Vegetation Regulations 2017 that establishes that the vegetation to be cleared is categorised as 'Level 1 clearance' or (b) an application for land division which is being considered concurrently with a proposal to develop each allotment which will satisfy, or would satisfy, the requirements of DTS/DPF 1.1, including any clearance that may occur or (c) the division is to support a Heritage Agreement under the Native Vegetation Act 1991 or the Heritage Places Act

Page 25 of 133 Printed on 1/02/2022

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Development that is the subject of a report prepared in accordance with Regulation 18(2)(a) of the Native Vegetation Regulations 2017 that categorises the clearance, or potential clearance, as 'Level 3 clearance' or 'Level 4 clearance'.	Native Vegetation Council	To provide expert assessment and direction to the relevant authority on the potential impacts of development on native vegetation.	Development of a class to which Schedule 9 clause 3 item 11 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Prescribed Wells Area Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Sustainable water use in prescribed wells areas.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
All development, but in particular involving any of the following:	Development satisfies either of the following:
(a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry has a lawful, sustainable and reliable water supply that does not place undue strain on water resources in prescribed wells areas.	 (a) the applicant has a current water licence in which sufficient spare capacity exists to accommodate the water needs of the proposed use or (b) the proposal does not involve the taking of water for which a licence would be required under the <i>Landscape South Australia Act 2019</i>.

Page 26 of 133 Printed on 1/02/2022

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Any of the following classes of development that require or may require water to be taken in addition to any allocation that has already been granted under the Landscape South Australia Act 2019: (a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry. Commercial forestry that requires a forest water licence under Part 8 Division 6 of the Landscape South Australia Act 2019.	The Chief Executive of the Department of the Minister responsible for the administration of the Landscape South Australia Act 2019.	To provide expert technical assessment and direction to the relevant authority on the taking of water to ensure development is undertaken sustainably.	Development of a class to which Schedule 9 clause 3 item 13 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Regulated and Significant Tree Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Conservation of regulated and significant trees to provide aesthetic and environmental benefits and mitigate tree loss.	

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Tree Retention	on and Health
PO 1.1	DTS/DPF 1.1
Regulated trees are retained where they:	None are applicable.
(a) make an important visual contribution to local character and amenity	
(b) are indigenous to the local area and listed under the National Parks and Wildlife Act 1972 as a rare or endangered native species and / or	

Page 27 of 133 Printed on 1/02/2022

Policy24	- Enquiry	
(c)	provide an important habitat for native fauna.	
PO 1.2		DTS/DPF 1.2
Significa	ant trees are retained where they:	None are applicable.
(a)	make an important contribution to the character or amenity of the local area	
(b)	are indigenous to the local area and are listed under the National Parks and Wildlife Act 1972 as a rare or endangered native species	
	represent an important habitat for native fauna	
(d)	are part of a wildlife corridor of a remnant area of native vegetation	
(e)	local environment	
(f)	and / or form a notable visual element to the landscape of the local	
(1)	area.	
PO 1.3		DTS/DPF 1.3
	lamaging activity not in connection with other development	None are applicable.
satisfies	s (a) and (b):	
(a)	tree damaging activity is only undertaken to:	
	remove a diseased tree where its life expectancy is short	
	(ii) mitigate an unacceptable risk to public or private safety due to limb drop or the like	
	(iii) rectify or prevent extensive damage to a building of value as comprising any of the following:	
	A. a Local Heritage Place	
	B. a State Heritage Place C. a substantial building of value	
	and there is no reasonable alternative to rectify or prevent such damage other than to undertake a tree damaging activity	
	(iv) reduce an unacceptable hazard associated with a tree within 20m of an existing residential, tourist accommodation or other habitable building from bushfire	
	(v) treat disease or otherwise in the general interests of the health of the tree and / or	
	(vi) maintain the aesthetic appearance and structural integrity of the tree	
(b)	in relation to a significant tree, tree-damaging activity is avoided unless all reasonable remedial treatments and measures have been determined to be ineffective.	
PO 1.4		DTS/DPF 1.4
	lamaging activity in connection with other development all the following:	None are applicable.
(a)	it accommodates the reasonable development of land in accordance with the relevant zone or subzone where such development might not otherwise be possible	
(b)	in the case of a significant tree, all reasonable	

Page 28 of 133 Printed on 1/02/2022

- Shoy24 Enquiry		
development options and design solutions have been considered to prevent substantial tree-damaging activity occurring.		
Ground work	affecting trees	
PO 2.1	DTS/DPF 2.1	
Regulated and significant trees, including their root systems, are not unduly compromised by excavation and / or filling of land, or the sealing of surfaces within the vicinity of the tree to support their retention and health.	None are applicable.	
Land [Division	
PO 3.1	DTS/DPF 3.1	
Land division results in an allotment configuration that enables its subsequent development and the retention of regulated and significant trees as far as is reasonably practicable.	Land division where: (a) there are no regulated or significant trees located within or adjacent to the plan of division or (b) the application demonstrates that an area exists to accommodate subsequent development of proposed allotments after an allowance has been made for a tree protection zone around any regulated tree within and adjacent to the plan of division.	

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

	Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
No	ne	None	None	None

Part 4 - General Development Policies

Advertisements

Assessment Provisions (AP)

Desired Outcome		
DO 1	Advertisements and advertising hoardings are appropriate to context, efficient and effective in communicating with the public, limited in number to avoid clutter, and do not create hazard.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 29 of 133 Printed on 1/02/2022

Performance Outcome

Deemed-to-Satisfy Criteria / **Designated Performance Feature**

Appearance

PO 1.1

Advertisements are compatible and integrated with the design of the building and/or land they are located on.

DTS/DPF 1.1

Advertisements attached to a building satisfy all of the following:

- are not located in a Neighbourhood-type zone (a)
- (b) where they are flush with a wall:
 - if located at canopy level, are in the form of a fascia sign
 - (ii) if located above canopy level:
 - do not have any part rising above parapet height
 - B. are not attached to the roof of the building
- (c) where they are not flush with a wall:
 - if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure
 - (ii) if attached to a two-storey building:
 - has no part located above the finished floor level of the second storey of the building
 - В. does not protrude beyond the outer limits of any verandah structure below
 - C. does not have a sign face that exceeds 1m2 per side.
- (d) if located below canopy level, are flush with a wall
- if located at canopy level, are in the form of a fascia sign (e)
- (f) if located above a canopy:
 - (i) are flush with a wall
 - (ii) do not have any part rising above parapet height
 - are not attached to the roof of the building.
- (g) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure
- (h) if attached to a two-storey building, have no part located above the finished floor level of the second storey of the
- (i) where they are flush with a wall, do not, in combination with any other existing sign, cover more than 15% of the building facade to which they are attached.

PO 1.2

Advertising hoardings do not disfigure the appearance of the land upon which they are situated or the character of the locality.

DTS/DPF 1.2

Where development comprises an advertising hoarding, the supporting structure is:

(a) concealed by the associated advertisement and decorative detailing or

Printed on 1/02/2022 Page 30 of 133

	(b) not visible from an adjacent public street or thoroughfare, other than a support structure in the form of a single or dual post design.
PO 1.3	DTS/DPF 1.3
Advertising does not encroach on public land or the land of an adjacent allotment.	Advertisements and/or advertising hoardings are contained within the boundaries of the site.
PO 1.4	DTS/DPF 1.4
Where possible, advertisements on public land are integrated with existing structures and infrastructure.	Advertisements on public land that meet at least one of the following:
	(a) achieves Advertisements DTS/DPF 1.1 (b) are integrated with a bus shelter.
PO 1.5	DTS/DPF 1.5
Advertisements and/or advertising hoardings are of a scale and size appropriate to the character of the locality.	None are applicable.
Proliferation of	Advertisements
PO 2.1	DTS/DPF 2.1
Proliferation of advertisements is minimised to avoid visual clutter and untidiness.	No more than one freestanding advertisement is displayed per occupancy.
PO 2.2	DTS/DPF 2.2
Multiple business or activity advertisements are co-located and coordinated to avoid visual clutter and untidiness.	Advertising of a multiple business or activity complex is located on a single advertisement fixture or structure.
PO 2.3	DTS/DPF 2.3
Proliferation of advertisements attached to buildings is minimised to avoid visual clutter and untidiness.	Advertisements satisfy all of the following:
	 (a) are attached to a building (b) other than in a Neighbourhood-type zone, where they are flush with a wall, cover no more than 15% of the building facade to which they are attached
	(c) do not result in more than one sign per occupancy that is not flush with a wall.
Advertising Content	
PO 3.1	DTS/DPF 3.1
Advertisements are limited to information relating to the lawful use of land they are located on to assist in the ready identification of the activity or activities on the land and avoid unrelated content that contributes to visual clutter and untidiness.	Advertisements contain information limited to a lawful existing or proposed activity or activities on the same site as the advertisement.
Amenity	/ Impacts
PO 4.1	DTS/DPF 4.1
Light spill from advertisement illumination does not unreasonably compromise the amenity of sensitive receivers.	Advertisements do not incorporate any illumination.
Sa	fety
PO 5.1	DTS/DPF 5.1

Page 31 of 133 Printed on 1/02/2022

Policy24 - Enquiry	
Advertisements and/or advertising hoardings erected on a verandah or projecting from a building wall are designed and located to allow for safe and convenient pedestrian access.	Advertisements have a minimum clearance of 2.5m between the top of the footpath and base of the underside of the sign.
PO 5.2	DTS/DPF 5.2
Advertisements and/or advertising hoardings do not distract or create a hazard to drivers through excessive illumination.	No advertisement illumination is proposed.
PO 5.3	DTS/DPF 5.3
Advertisements and/or advertising hoardings do not create a hazard to drivers by: (a) being liable to interpretation by drivers as an official traffic sign or signal (b) obscuring or impairing drivers' view of official traffic signs or signals (c) obscuring or impairing drivers' view of features of a road that are potentially hazardous (such as junctions, bends, changes in width and traffic control devices) or other road or rail vehicles at/or approaching level crossings. PO 5.4 Advertisements and/or advertising hoardings do not create a hazard by distracting drivers from the primary driving task at a location	Advertisements satisfy all of the following: (a) are not located in a public road or rail reserve (b) are located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram Corner Cut-Off Area Road Reserve DTS/DPF 5.4 Advertisements and/or advertising hoardings are not located along or adjacent to a road having a speed limit of 80km/h or more.
where the demands on driver concentration are high.	DTC/DDF 6 6
Advertisements and/or advertising hoardings provide sufficient clearance from the road carriageway to allow for safe and convenient movement by all road users.	DTS/DPF 5.5 Where the advertisement or advertising hoarding is: (a) on a kerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 0.6m from the roadside edge of the kerb (b) on an unkerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 5.5m from the edge of the seal (c) on any other kerbed or unkerbed road, the advertisement or advertising hoarding is located a minimum of the following distance from the roadside edge of the kerb or the seal: (a) 110 km/h road - 14m (b) 100 km/h road - 13m (c) 90 km/h road - 10m (d) 70 or 80 km/h road - 8.5m.
PO 5.6 Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 5.6 Advertising: (a) is not illuminated (b) does not incorporate a moving or changing display or message (c) does not incorporate a flashing light(s).

Animal Keeping and Horse Keeping

Page 32 of 133 Printed on 1/02/2022

Assessment Provisions (AP)

Desired Outcome		
DO 1	Animals are kept at a density that is not beyond the carrying capacity of the land and in a manner that minimises their adverse effects on the environment, local amenity and surrounding development.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting a	nd Design
PO 1.1	DTS/DPF 1.1
Animal keeping, horse keeping and associated activities do not create adverse impacts on the environment or the amenity of the locality.	None are applicable.
PO 1.2	DTS/DPF 1.2
Animal keeping and horse keeping is located and managed to minimise the potential transmission of disease to other operations where animals are kept.	None are applicable.
Horse Keeping	
PO 2.1	DTS/DPF 2.1
Water from stable wash-down areas is directed to appropriate absorption areas and/or drainage pits to minimise pollution of land and water.	None are applicable.
PO 2.2	DTS/DPF 2.2
Stables, horse shelters or associated yards are sited appropriate distances away from sensitive receivers and/or allotments in other ownership to avoid adverse impacts from dust, erosion and odour.	Stables, horse shelters and associated yards are sited in accordance with all of the following: (a) 30m or more from any sensitive receivers (existing or approved) on land in other ownership (b) where an adjacent allotment is vacant and in other ownership, 30m or more from the boundary of that allotment.
PO 2.3	DTS/DPF 2.3
All areas accessible to horses are separated from septic tank effluent disposal areas to protect the integrity of that system. Stable flooring is constructed with an impervious material to facilitate regular cleaning.	Septic tank effluent disposal areas are enclosed with a horse-proof barrier such as a fence to exclude horses from this area.
PO 2.4	DTS/DPF 2.4

Page 33 of 133 Printed on 1/02/2022

Policy24 - Lilquily	
To minimise environmental harm and adverse impacts on water resources, stables, horse shelters and associated yards are appropriately set back from a watercourse.	Stables, horse shelters and associated yards are set back 50m or more from a watercourse.
PO 2.5	DTS/DPF 2.5
Stables, horse shelters and associated yards are located on slopes that are stable to minimise the risk of soil erosion and water runoff.	Stables, horse shelters and associated yards are not located on land with a slope greater than 10% (1-in-10).
Kei	nnels
PO 3.1	DTS/DPF 3.1
Kennel flooring is constructed with an impervious material to facilitate regular cleaning.	The floors of kennels satisfy all of the following: (a) are constructed of impervious concrete (b) are designed to be self-draining when washed down.
PO 3.2	DTS/DPF 3.2
Kennels and exercise yards are designed and sited to minimise noise nuisance to neighbours through measures such as:	Kennels are sited 500m or more from the nearest sensitive receiver on land in other ownership.
(a) adopting appropriate separation distances (b) orientating openings away from sensitive receivers.	
PO 3.3	DTS/DPF 3.3
Dogs are regularly observed and managed to minimise nuisance impact on adjoining sensitive receivers from animal behaviour.	Kennels are sited in association with a permanent dwelling on the land.
Wa	ustes
PO 4.1	DTS/DPF 4.1
Storage of manure, used litter and other wastes (other than wastewater lagoons) is designed, constructed and managed to minimise attracting and harbouring vermin.	None are applicable.
PO 4.2	DTS/DPF 4.2
Facilities for the storage of manure, used litter and other wastes (other than wastewater lagoons) are located to minimise the potential for polluting water resources.	Waste storage facilities (other than wastewater lagoons) are located outside the 1% AEP flood event areas.

Aquaculture

Assessment Provisions (AP)

Desired Outcome		
DO 1	Aquaculture facilities are developed in an ecologically, economically and socially sustainable manner to support an equitable sharing of marine, coastal and inland resources and mitigate conflict with other water-based and land-based uses.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 34 of 133 Printed on 1/02/2022

Performance Outcome Deemed-to-Satisfy Criteria / **Designated Performance Feature** Land-based Aquaculture PO 1.1 DTS/DPF 1.1 Land-based aquaculture and associated components are sited and Land-based aquaculture and associated components are located to designed to mitigate adverse impacts on nearby sensitive receivers. satisfy all of the following: (a) 200m or more from a sensitive receiver in other ownership (b) 500m or more from the boundary of a zone primarily intended to accommodate sensitive receivers. PO 1.2 DTS/DPF 1.2 Land-based aquaculture and associated components are sited and None are applicable. designed to prevent surface flows from entering ponds in a 1% AEP sea flood level event. PO 1.3 DTS/DPF 1.3 Land-based aquaculture and associated components are sited and None are applicable. designed to prevent pond leakage that would pollute groundwater. PO 1.4 DTS/DPF 1.4 Land-based aquaculture and associated components are sited and None are applicable. designed to prevent farmed species escaping and entering into any waters. PO 1.5 DTS/DPF 1.5 Land-based aquaculture and associated components, including None are applicable. intake and discharge pipes, are designed to minimise the need to traverse sensitive areas to minimise impact on the natural environment. PO 1.6 DTS/DPF 1.6 Pipe inlets and outlets associated with land-based aquaculture are None are applicable. sited and designed to minimise the risk of disease transmission. PO 1.7 DTS/DPF 1.7 Storage areas associated with aquaculture activity are integrated None are applicable. with the use of the land and sited and designed to minimise their visual impact on the surrounding environment. Marine Based Aquaculture PO 2.1 DTS/DPF 2.1 Marine aquaculture is sited and designed to minimise its adverse None are applicable. impacts on sensitive ecological areas including: (a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems.

Page 35 of 133 Printed on 1/02/2022

	1
PO 2.2	DTS/DPF 2.2
Marine aquaculture is sited in areas with adequate water current to disperse sediments and dissolve particulate wastes to prevent the build-up of waste that may cause environmental harm.	None are applicable.
PO 2.3	DTS/DPF 2.3
Marine aquaculture is designed to not involve discharge of human waste on the site, on any adjacent land or into nearby waters.	None are applicable.
PO 2.4	DTS/DPF 2.4
Marine aquaculture (other than inter-tidal aquaculture) is located an appropriate distance seaward of the high water mark.	Marine aquaculture development is located 100m or more seaward of the high water mark.
PO 2.5	DTS/DPF 2.5
Marine aquaculture is sited and designed to not obstruct or interfere with:	None are applicable.
areas of high public use areas, including beaches, used for recreational activities such as swimming, fishing, skiing, sailing and other water sports	
(c) areas of outstanding visual or environmental value	
 (d) areas of high tourism value (e) areas of important regional or state economic activity, including commercial ports, wharfs and jetties 	
(f) the operation of infrastructure facilities including inlet and outlet pipes associated with the desalination of sea water.	
PO 2.6	DTS/DPF 2.6
Marine aquaculture is sited and designed to minimise interference and obstruction to the natural processes of the coastal and marine environment.	None are applicable.
PO 2.7	DTS/DPF 2.7
Marine aquaculture is designed to be as unobtrusive as practicable by incorporating measures such as:	None are applicable.
(a) using feed hoppers painted in subdued colours and suspending them as close as possible to the surface of the water	
(b) positioning structures to protrude the minimum distance practicable above the surface of the water	
(c) avoiding the use of shelters and structures above cages and platforms unless necessary to exclude predators and protected species from interacting with the farming structures and/or stock inside the cages, or for safety reasons	
(d) positioning racks, floats and other farm structures in unobtrusive locations landward from the shoreline.	
PO 2.8	DTS/DPF 2.8
Access, launching and maintenance facilities utilise existing established roads, tracks, ramps and paths to or from the sea where possible to minimise environmental and amenity impacts.	None are applicable.

Page 36 of 133 Printed on 1/02/2022

PO 2.9	DTS/DPF 2.9		
Access, launching and maintenance facilities are developed as common user facilities and are co-located where practicable to mitigate adverse impacts on coastal areas.	None are applicable.		
PO 2.10	DTS/DPF 2.10		
Marine aquaculture is sited to minimise potential impacts on, and to protect the integrity of, reserves under the <i>National Parks and Wildlife Act 1972</i> .	Marine aquaculture is located 1000m or more seaward of the boundary of any reserve under the <i>National Parks and Wildlife Ad</i> 1972.		
PO 2.11	DTS/DPF 2.11		
Onshore storage, cooling and processing facilities do not impair the coastline and its visual amenity by:	None are applicable.		
(a) being sited, designed, landscaped and of a scale to reduce the overall bulk and appearance of buildings and complement the coastal landscape			
(b) making provision for appropriately sited and designed vehicular access arrangements, including using existing vehicular access arrangements as far as practicable			
(c) incorporating appropriate waste treatment and disposal.			
Navigation	and Safety		
PO 3.1	DTS/DPF 3.1		
Marine aquaculture sites are suitably marked to maintain navigational safety.	None are applicable.		
PO 3.2	DTS/DPF 3.2		
Marine aquaculture is sited to provide adequate separation between farms for safe navigation.	None are applicable.		
Environmenta	I Management		
PO 4.1	DTS/DPF 4.1		
Marine aquaculture is maintained to prevent hazards to people and wildlife, including breeding grounds and habitats of native marine mammals and terrestrial fauna, especially migratory species.	None are applicable.		
PO 4.2	DTS/DPF 4.2		
Marine aquaculture is designed to facilitate the relocation or removal of structures in the case of emergency such as oil spills, algal blooms and altered water flows.	None are applicable.		
PO 4.3	DTS/DPF 4.3		
Marine aquaculture provides for progressive or future reclamation of disturbed areas ahead of, or upon, decommissioning.	None are applicable.		
PO 4.4	DTS/DPF 4.4		
Aquaculture operations incorporate measures for the removal and disposal of litter, disused material, shells, debris, detritus, dead animals and animal waste to prevent pollution of waters, wetlands, or the nearby coastline.	None are applicable.		

Page 37 of 133 Printed on 1/02/2022

Beverage Production in Rural Areas

Assessment Provisions (AP)

Desired Outcome			
	Mitigation of potential amenity and environmental impacts of value-adding beverage production facilities such as wineries, distilleries, cideries and breweries.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Odour a	and Noise	
PO 1.1	DTS/DPF 1.1	
Beverage production activities are designed and sited to minimise odour impacts on rural amenity.	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Beverage production activities are designed and sited to minimise noise impacts on sensitive receivers.	None are applicable.	
PO 1.3	DTS/DPF 1.3	
Fermentation, distillation, manufacturing, storage, packaging and bottling activities occur within enclosed buildings to improve the visual appearance within a locality and manage noise associated with these activities.	None are applicable.	
PO 1.4	DTS/DPF 1.4	
Breweries are designed to minimise odours emitted during boiling and fermentation stages of production.	Brew kettles are fitted with a vapour condenser.	
PO 1.5	DTS/DPF 1.5	
Beverage production solid wastes are stored in a manner that minimises odour impacts on sensitive receivers in other ownership.	Solid waste from beverage production is collected and stored in sealed containers and removed from the site within 48 hours.	
Water	Quality	
PO 2.1	DTS/DPF 2.1	
Beverage production wastewater management systems (including wastewater irrigation) are set back from watercourses to minimise adverse impacts on water resources.	Wastewater management systems are set back 50m or more from the banks of watercourses and bores.	
PO 2.2	DTS/DPF 2.2	

Page 38 of 133 Printed on 1/02/2022

Policy24 - Enquiry			
The storage or disposal of chemicals or hazardous substances is undertaken in a manner to prevent pollution of water resources.	s None are applicable.		
PO 2.3	DTS/DPF 2.3		
Stormwater runoff from areas that may cause contamination due to beverage production activities (including vehicle movements and machinery operations) is drained to an onsite stormwater treatment system to manage potential environmental impacts.	None are applicable.		
PO 2.4	DTS/DPF 2.4		
Stormwater runoff from areas unlikely to cause contamination by beverage production and associated activities (such as roof catchments and clean hard-paved surfaces) is diverted away from beverage production areas and wastewater management systems.	None are applicable.		
Wastewat	er Irrigation		
PO 3.1	DTS/DPF 3.1		
Beverage production wastewater irrigation systems are designed and located to not contaminate soil and surface and ground water resources or damage crops.	None are applicable.		
PO 3.2	DTS/DPF 3.2		
Beverage production wastewater irrigation systems are designed and located to minimise impact on amenity and avoid spray drift onto adjoining land.	Beverage production wastewater is not irrigated within 50m of any dwelling in other ownership.		
PO 3.3	DTS/DPF 3.3		
Beverage production wastewater is not irrigated onto areas that pose an undue risk to the environment or amenity such as:	None are applicable.		
(a) waterlogged areas (b) land within 50m of a creek, swamp or domestic or stock water bore			
(c) land subject to flooding			
(d) steeply sloping land (e) rocky or highly permeable soil overlaying an unconfined aquifer.			

Bulk Handling and Storage Facilities

Assessment Provisions (AP)

Desired Outcome			
DO 1	Facilities for the bulk handling and storage of agricultural, mineral, petroleum, rock, ore or other similar commodities are designed to minimise adverse impacts on transport networks, the landscape and surrounding land uses.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 39 of 133 Printed on 1/02/2022

Performance Outcome

Deemed-to-Satisfy Criteria / Designated Performance Feature

Siting and Design

PO 1.1

Bulk handling and storage facilities are sited and designed to minimise risks of adverse air quality and noise impacts on sensitive receivers. DTS/DPF 1.1

Facilities for the handling, storage and dispatch of commodities in bulk (excluding processing) meet the following minimum separation distances from sensitive receivers:

- (a) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals), where the handling of these materials into or from vessels does not exceed 100 tonnes per day: 300m or more from residential premises not associated with the facility
- (b) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility: 300m or more from residential premises not associated with the facility
- (c) bulk petroleum storage involving individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1,000 cubic metres: 500m or more
- (d) coal handling with:
 - a. capacity up to 1 tonne per day or a storage capacity up to 50 tonnes: 500m or more
 - b. capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes: 1000m or more.

Buffers and Landscaping

PO 2.1

Bulk handling and storage facilities incorporate a buffer area for the establishment of dense landscaping adjacent road frontages to enhance the appearance of land and buildings from public

DTS/DPF 2.1

None are applicable.

PO 2.2

thoroughfares.

Bulk handling and storage facilities incorporate landscaping to assist with screening and dust filtration.

DTS/DPF 2.2

None are applicable.

Access and Parking

PO 3.1

TS/DPF 3.1

Roadways and vehicle parking areas associated with bulk handling and storage facilities are designed and surfaced to control dust emissions and prevent drag out of material from the site.

Roadways and vehicle parking areas are sealed with an all-weather surface.

Slipways, Wharves and Pontoons

PO 4.1

DTS/DPF 4.1

Slipways, wharves and pontoons used for the handling of bulk materials (such as fuel, oil, catch, bait and the like) incorporate catchment devices to avoid the release of materials into adjacent waters.

None are applicable.

Page 40 of 133 Printed on 1/02/2022

Clearance from Overhead Powerlines

Assessment Provisions (AP)

	Desired Outcome
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of the following is satisfied: (a) a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the Electricity Act 1996
	(b) there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Design

Assessment Provisions (AP)

	Desired Outcome			
	DO 1	Develo	pment is:	
(a) contextual - by considering, recognising and carefully responding to its natural surroundings or and positively contributes to the character of the immediate area			contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributes to the character of the immediate area	
(b)		(b)	durable - fit for purpose, adaptable and long lasting	
		(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access, and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors	
		(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.	

Performance Outcome

Deemed-to-Satisfy Criteria /

Page 41 of 133 Printed on 1/02/2022

Designated Performance Feature All development External Appearance PO 1.1 DTS/DPF 1.1 Buildings reinforce corners through changes in setback, None are applicable. articulation, materials, colour and massing (including height, width, bulk, roof form and slope). PO 1.2 DTS/DPF 1.2 Where zero or minor setbacks are desirable, development provides None are applicable. shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm. PO 1.3 DTS/DPF 1.3 Building elevations facing the primary street (other than ancillary None are applicable. buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape. PO 1.4 DTS/DPF 1.4 Plant, exhaust and intake vents and other technical equipment is Development does not incorporate any structures that protrude integrated into the building design to minimise visibility from the beyond the roofline. public realm and negative impacts on residential amenity by: (a) positioning plant and equipment in unobtrusive locations viewed from public roads and spaces (b) screening rooftop plant and equipment from view (c) when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses. PO 1.5 DTS/DPF 1.5 The negative visual impact of outdoor storage, waste management, None are applicable. loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form) taking into account the form of development contemplated in the relevant zone. Safety PO 2.1 DTS/DPF 2.1 Development maximises opportunities for passive surveillance of the None are applicable. public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 DTS/DPF 2.2 Development is designed to differentiate public, communal and None are applicable. private areas. PO 2.3 DTS/DPF 2.3

Page 42 of 133 Printed on 1/02/2022

None are applicable.

Buildings are designed with safe, perceptible and direct access

Policy24 - Eriquity			
from public street frontages and vehicle parking areas.			
PO 2.4	DTS/DPF 2.4		
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.		
PO 2.5	DTS/DPF 2.5		
Common areas and entry points of buildings (such as the foyer areas of residential buildings), and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.		
Lands	caping		
PO 3.1	DTS/DPF 3.1		
Soft landscaping and tree planting is incorporated to:	None are applicable.		
 (a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes (e) contribute to biodiversity. 			
PO 3.2	DTS/DPF 3.2		
Soft landscaping and tree planting maximises the use of locally indigenous plant species, incorporates plant species best suited to current and future climate conditions and avoids pest plant and weed species.	None are applicable.		
Environmenta	l Performance		
PO 4.1	DTS/DPF 4.1		
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	None are applicable.		
PO 4.2	DTS/DPF 4.2		
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.		
PO 4.3	DTS/DPF 4.3		
Buildings incorporate climate-responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.		
Water Sens	itive Design		
PO 5.1	DTS/DPF 5.1		
Development is sited and designed to maintain natural hydrological	None are applicable		
systems without negatively impacting:	None are applicable.		

Page 43 of 133 Printed on 1/02/2022

(c) the quality and function of natural springs.			
On-site Waste Tr	reatment Systems		
PO 6.1	DTS/DPF 6.1		
Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.	 (a) encroach within an area used as private open space of result in less private open space than that specified in Design Table 1 - Private Open Space (b) use an area also used as a driveway (c) encroach within an area used for on-site car parking of result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. 		
Carparking	Appearance		
Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as: (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.	DTS/DPF 7.1 None are applicable.		
PO 7.2 Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.	DTS/DPF 7.2 None are applicable.		
PO 7.3	DTS/DPF 7.3		
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.		
PO 7.4	DTS/DPF 7.4		
Street level vehicle parking areas incorporate tree planting to provide shade and reduce solar heat absorption and reflection.	None are applicable.		
PO 7.5 Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	DTS/DPF 7.5 None are applicable.		
PO 7.6	DTS/DPF 7.6		
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.		
PO 7.7	DTS/DPF 7.7		
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous	None are applicable.		

Page 44 of 133 Printed on 1/02/2022

surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.			
Earthworks a	nd sloping land		
PO 8.1	DTS/DPF 8.1		
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to	Development does not involve any of the following:		
natural topography.	(a) excavation exceeding a vertical height of 1m		
	(b) filling exceeding a vertical height of 1m		
	(c) a total combined excavation and filling vertical height of 2m or more.		
PO 8.2	DTS/DPF 8.2		
Driveways and access tracks are designed and constructed to allow			
safe and convenient access on sloping land (with a gradient exceeding 1 in 8).	exceeding 1 in 8) satisfy (a) and (b):		
January Control of the Control of th	(a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway		
	(b) are constructed with an all-weather trafficable surface.		
PO 8.3	DTS/DPF 8.3		
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.		
(a) do not contribute to the instability of embankments and cuttings			
(b) provide level transition areas for the safe movement of people and goods to and from the development			
(c) are designed to integrate with the natural topography of the land.			
PO 8.4	DTS/DPF 8.4		
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.	None are applicable.		
PO 8.5	DTS/DPF 8.5		
Development does not occur on land at risk of landslip nor increases the potential for landslip or land surface instability.	None are applicable.		
Fences	and Walls		
PO 9.1	DTS/DPF 9.1		
Fences, walls and retaining walls are of sufficient height to maintain privacy and security without unreasonably impacting the visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.		
PO 9.2	DTS/DPF 9.2		
Landscaping incorporated on the low side of retaining walls is visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.		

Page 45 of 133 Printed on 1/02/2022

Overlooking / Visual Privacy (in building 3 storeys or less) PO 10.1 DTS/DPF 10.1 Development mitigates direct overlooking from upper level windows Upper level windows facing side or rear boundaries shared with a to habitable rooms and private open spaces of adjoining residential residential allotment/site satisfy one of the following: uses. are permanently obscured to a height of 1.5m above (a) finished floor level and are fixed or not capable of being opened more than 200mm (b) have sill heights greater than or equal to 1.5m above finished floor level (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level. PO 10.2 **DTS/DPF 10.2** Development mitigates direct overlooking from balconies, terraces One of the following is satisfied: and decks to habitable rooms and private open space of adjoining the longest side of the balcony or terrace will face a public residential uses. road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land (ii) 1.7m above finished floor level in all other cases All Residential development Front elevations and passive surveillance DTS/DPF 11.1 PO 11.1 Dwellings incorporate windows along primary street frontages to Each dwelling with a frontage to a public street: encourage passive surveillance and make a positive contribution to (a) includes at least one window facing the primary street from the streetscape. a habitable room that has a minimum internal room. dimension of 24m (b) has an aggregate window area of at least 2m² facing the primary street. PO 11.2 **DTS/DPF 11.2** Dwellings incorporate entry doors within street frontages to address Dwellings with a frontage to a public street have an entry door the street and provide a legible entry point for visitors. visible from the primary street boundary. Outlook and amenity DTS/DPF 12.1 PO 12.1 Living rooms have an external outlook to provide a high standard of A living room of a dwelling incorporates a window with an outlook amenity for occupants. towards the street frontage or private open space, public open space, or waterfront areas. PO 12.2 **DTS/DPF 12.2**

Page 46 of 133 Printed on 1/02/2022

Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.

None are applicable.

Ancillary Development

PO 13.1

Residential ancillary buildings and structures are sited and designed to not detract from the streetscape or appearance of buildings on the site or neighbouring properties.

DTS/DPF 13.1

Ancillary buildings:

- (a) are ancillary to a dwelling erected on the same site
- (b) have a floor area not exceeding 60m2
- (c) are not constructed, added to or altered so that any part is situated:
 - (i) in front of any part of the building line of the dwelling to which it is ancillary
 - (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
- (d) in the case of a garage or carport, the garage or carport:
 - (i) is set back at least 5.5m from the boundary of the primary street
 - (ii) when facing a primary street or secondary street, has a total door / opening not exceeding:
 - A. for dwellings of single building level 7m in width or 50% of the site frontage, whichever is the lesser
 - B. for dwellings comprising two or more building levels at the building line fronting the same public street 7m in width
- (e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
 - (i) a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary

and

- (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- (h) have a wall height or post height not exceeding 3m above natural ground level
- (i) have a roof height where no part of the roof is more than 5m above the natural ground level
- (j) if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
 - (i) a total area as determined by the following table:

Page 47 of 133 Printed on 1/02/2022

Policy24 - Eriquily	•			
		Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site	
		<150	10%	
		150-200	15%	
		201-450	20%	
		>450	25%	
	(ii)	the amount of existing soft lands the development occurring.	scaping prior to	
PO 13.2	DTS/DPF 13.2			
Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision or car parking requirements and do not result in over-development of the site.	Ancillary buildings and structures do not result in: (a) less private open space than specified in Design in Urban Areas Table 1 - Private Open Space (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.			
PO 13.3	DTS/DPF 13.3			
Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa is positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers.	The pump and/or filtration system is ancillary to a dwelling erected on the same site and is: (a) enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment or (b) located at least 12m from the nearest habitable room located on an adjoining allotment.			
Garage a	ppearance			
PO 14.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling.	DTS/DPF 14.1 Garages and carports facing a street: (a) are situated so that no part of the garage or carport is in			
	(b) are set I primary (c) have a (d) have a (the site	any part of the building line of the back at least 5.5m from the bour street garage door / opening not exceed garage door /opening width not e frontage unless the dwelling has levels at the building line fronting	dary of the ding 7m in width xceeding 50% of two or more	
	street.		•	
Mas	ssing			
PO 15.1	DTS/DPF 15.1			
The visual mass of larger buildings is reduced when viewed from	d when viewed from None are applicable			

Page 48 of 133 Printed on 1/02/2022

adjoining allotments or public streets.

Dwelling additions

PO 16.1

Dwelling additions are sited and designed to not detract from the streetscape or amenity of adjoining properties and do not impede on-site functional requirements.

DTS / DPF 16.1

Dwelling additions:

- (a) are not constructed, added to or altered so that any part is situated closer to a public street
- (b) do not result in:
 - (i) excavation exceeding a vertical height of 1m
 - (ii) filling exceeding a vertical height of 1m
 - (iii) a total combined excavation and filling vertical height of 2m or more
 - (iv) less Private Open Space than specified in Design Table 1 - Private Open Space
 - less on-site parking than specified in Transport Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas
 - (vi) upper level windows facing side or rear boundaries unless:
 - they are permanently obscured to a height of 1.5m above finished floor level that is fixed or not capable of being opened more than 200mm or
 - B. have sill heights greater than or equal to 1.5m above finished floor level or
 - C. incorporate screening to a height of 1.5m above finished floor level
 - (vii) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:
 - A. 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land
 - B. 1.7m above finished floor level in all other cases.

Private Open Space

PO 17.1

Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.

DTS/DPF 17.1

Private open space is provided in accordance with Design Table 1 - Private Open Space.

Water Sensitive Design

PO 18.1

DTS/DPF 18.1

Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system,

Residential development creating a common driveway / access that services 5 or more dwellings achieves the following stormwater runoff outcomes:

Page 49 of 133 Printed on 1/02/2022

PO 18.2 Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	 (a) 80 per cent reduction in average annual total suspended solids (b) 60 per cent reduction in average annual total phosphorus (c) 45 per cent reduction in average annual total nitrogen. DTS/DPF 18.2 Development creating a common driveway / access that services 5 or more dwellings: (a) maintains the pre-development peak flow rate from the site based upon a 0.35 runoff coefficient for the 18.1% AEP 30-minute storm and the stormwater runoff time to peak is not increased or captures and retains the difference in pre-development runoff volume (based upon a 0.35 runoff coefficient) vs post development runoff volume from the site for an 18.1% AEP 30-minute storm; and (b) manages site generated stormwater runoff up to and
	including the 1% AEP flood event to avoid flooding of buildings.
Car parking, acces	s and manoeuvrability
PO 19.1	DTS/DPF 19.1
Enclosed parking spaces are of a size and dimensions to be functional, accessible and convenient.	Residential car parking spaces enclosed by fencing, walls or other structures have the following internal dimensions (separate from any waste storage area):
	 (a) single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double width car parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.4m (iii) minimum garage door width of 2.4m per space.
PO 19.2	DTS/DPF 19.2
Uncovered parking spaces are of a size and dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have: (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m
PO 19.3	DTS/DPF 19.3
Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages, domestic waste collection and onstreet parking.	Driveways and access points on sites with a frontage to a public road of 10m or less have a width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site.
PO 19.4	DTS/DPF 19.4
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street	Vehicle access to designated car parking spaces satisfy (a) or (b):

Page 50 of 133 Printed on 1/02/2022

(a) is provided via a lawfully existing or authorised access infrastructure or street trees. point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed: (i) is set back 6m or more from the tangent point of an intersection of 2 or more roads (ii) is set back outside of the marked lines or infrastructure dedicating a pedestrian crossing (iii) does not involve the removal, relocation or damage to of mature street trees, street furniture or utility infrastructure services. PO 19.5 **DTS/DPF 19.5** Driveways are designed to enable safe and convenient vehicle Driveways are designed and sited so that: movements from the public road to on-site parking spaces. the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1:4 on average (b) they are aligned relative to the street boundary so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the street boundary (c) if located to provide access from an alley, lane or right of way - the alley, land or right or way is at least 6.2m wide along the boundary of the allotment / site PO 19.6 **DTS/DPF 19.6** Driveways and access points are designed and distributed to Where on-street parking is available abutting the site's street optimise the provision of on-street visitor parking. frontage, on-street parking is retained in accordance with the following requirements: minimum 0.33 on-street spaces per dwelling on the site (a) (rounded up to the nearest whole number) minimum car park length of 5.4m where a vehicle can (b) enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. Waste storage PO 20.1 DTS/DPF 20.1 Provision is made for the adequate and convenient storage of waste None are applicable. bins in a location screened from public view. Design of Transportable Dwellings DTS/DPF 21.1 PO 21.1 The sub-floor space beneath transportable buildings is enclosed to Buildings satisfy (a) or (b): give the appearance of a permanent structure. (a) are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building. Group dwelling, residential flat buildings and battle-axe development

Page 51 of 133 Printed on 1/02/2022

Am	enity	
PO 22.1	DTS/DPF 22.1	
Dwellings are of a suitable size to accommodate a layout that is well organised and provides a high standard of amenity for occupants.	Dwellings have a minimum internative following table:	al floor area in accordance with
	Number of bedrooms	Minimum internal floor area
	Studio	35m ²
	1 bedroom	50m ²
	2 bedroom	65m ²
	3+ bedrooms	80m ² and any dwelling over 3 bedrooms provides an additional 15m ² for every additional bedroom
PO 22.2	DTS/DPF 22.2	
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.	None are applicable.	
PO 22.3	DTS/DPF 22.3	
Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.	None are applicable.	
PO 22.4	DTS/DPF 22.4	
Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.	Dwelling sites/allotments are not in arrangement.	n the form of a battle-axe
Communal	Open Space	
PO 23.1	DTS/DPF 23.1	
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.	
PO 23.2	DTS/DPF 23.2	
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorpora metres.	tes a minimum dimension of 5
PO 23.3	DTS/DPF 23.3	
Communal open space is designed and sited to:	None are applicable.	
(a) be conveniently accessed by the dwellings which it services		
(b) have regard to acoustic, safety, security and wind effects.		
PO 23.4	DTS/DPF 23.4	

Page 52 of 133 Printed on 1/02/2022

Communal open space contains landscaping and facilities that are	
functional, attractive and encourage recreational use.	None are applicable.
PO 23.5	DTS/DPF 23.5
Communal open space is designed and sited to:	None are applicable.
 in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance. 	
Carparking, access	and manoeuvrability
PO 24.1	DTS/DPF 24.1
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements: (a) minimum 0.33 on-street car parks per proposed dwellings
	(rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can
	enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 24.2	DTS/DPF 24.2
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.
PO 24.3	DTS/DPF 24.3
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site:
	(a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.
PO 24.4	DTS/DPF 24.4
Residential driveways in a battle-axe configuration are designed to allow safe and convenient movement.	Where in a battle-axe configuration, a driveway servicing one dwelling has a minimum width of 3m.
PO 24.5	DTS/DPF 24.5
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.
	<u> </u>

Page 53 of 133 Printed on 1/02/2022

Policy24 - Enquiry			
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.		
Soft Landscaping			
PO 25.1	DTS/DPF 25.1		
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or a building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.		
PO 25.2	DTS/DPF 25.2		
Soft landscaping is provided that improves the appearance of common driveways.	Where a common driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).		
Site Facilities /	Waste Storage		
PO 26.1	DTS/DPF 26.1		
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.		
PO 26.2	DTS/DPF 26.2		
Provision is made for suitable external clothes drying facilities.	None are applicable.		
PO 26.3	DTS/DPF 26.3		
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.		
located away, or screened, from public view, and conveniently located in proximity to dwellings and the waste collection point.			
PO 26.4	DTS/DPF 26.4		
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.		
PO 26.5	DTS/DPF 26.5		
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.		
PO 26.6	DTS/DPF 26.6		
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.		
Supported accommodation	on and retirement facilities		
Siting and C	Configuration		
PO 27.1	DTS/DPF 27.1		
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of	None are applicable.		

Page 54 of 133 Printed on 1/02/2022

Policy24 - Enquiry		
residents is not unduly restricted by the slope of the land.		
Movement and Access		
PO 28.1	DTS/DPF 28.1	
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.	
 (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40 and of 		
 (c) car parks with gradients no steeper than 1-in-40 and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. 		
Communal	Open Space	
PO 29.1	DTS/DPF 29.1	
Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	None are applicable.	
PO 29.2	DTS/DPF 29.2	
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.	
PO 29.3	DTS/DPF 29.3	
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.	
PO 29.4	DTS/DPF 29.4	
Communal open space is designed and sited to:	None are applicable.	
(a) be conveniently accessed by the dwellings which it services		
(b) have regard to acoustic, safety, security and wind effects.		
PO 29.5	DTS/DPF 29.5	
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.	
PO 29.6	DTS/DPF 29.6	
Communal open space is designed and sited to:	None are applicable.	
 in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance. 		
Site Facilities	Waste Storage	
PO 30.1	DTS/DPF 30.1	
Development is designed to provide storage areas for personal	None are applicable.	

Page 55 of 133 Printed on 1/02/2022

Policy24 - Enquiry		
items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric powered vehicles.		
PO 30.2	DTS/DPF 30.2	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.	
PO 30.3	DTS/DPF 28.3	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 30.4	DTS/DPF 30.4	
Provision is made for suitable household waste and recyclable material storage facilities conveniently located and screened from public view.	None are applicable.	
PO 30.5	DTS/DPF 30.5	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.	
PO 30.6	DTS/DPF 30.6	
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.	
PO 30.7	DTS/DPF 30.7	
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.	
All non-residential development		
Water Sens	itive Design	
PO 31.1	DTS/DPF 31.1	
Development likely to result in significant risk of export of litter, oil or grease includes stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.	

Water Sensitive Design		
PO 31.1	DTS/DPF 31.1	
Development likely to result in significant risk of export of litter, oil or grease includes stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.	
PO 31.2	DTS/DPF 31.2	
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.	

Wash-down and Waste Loading and Unloading

PO 32.1 DTS/DPF 32.1 Areas for activities including loading and unloading, storage of None are applicable. waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, vessels, plant or equipment are:

- (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off
- (b) paved with an impervious material to facilitate wastewater collection

Page 56 of 133 Printed on 1/02/2022

- (c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area
- (d) designed to drain wastewater to either:
 - (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or
 - (ii) a holding tank and its subsequent removal off-site on a regular basis.

Table 1 - Private Open Space

Dwelling Type	Minimum Rate
Dwelling (at ground level)	 Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Dwelling (above ground level)	Studio (no separate bedroom): 4m ² with a minimum dimension 1.8m One bedroom: 8m ² with a minimum dimension 2.1m Two bedroom dwelling: 11m ² with a minimum dimension 2.4m Three + bedroom dwelling: 15m ² with a minimum dimension 2.6m
Cabin or caravan (permanently fixed to the ground) in a residential park or a caravan and tourist park	Total area: 16m ² , which may be used as second car parking space, provided on each site intended for residential occupation.

Design in Urban Areas

Assessment Provisions (AP)

Desired Outcome		
DO 1	Develo	ppment is:
	(a)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality
	(b)	durable - fit for purpose, adaptable and long lasting
	(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors

Page 57 of 133 Printed on 1/02/2022

PO 2.2

(d) sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.

Performance Outcome

Deemed-to-Satisfy Criteria / Designated Performance Feature

	i catule	
All Development		
External Appearance		
PO 1.1	DTS/DPF 1.1	
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.	
PO 1.3	DTS/DPF 1.3	
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.	
PO 1.4	DTS/DPF 1.4	
Plant, exhaust and intake vents and other technical equipment are integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by: (a) positioning plant and equipment discretely, in unobtrusive	Development does not incorporate any structures that protrude beyond the roofline.	
locations as viewed from public roads and spaces (b) screening rooftop plant and equipment from view (c) when located on the roof of non-residential development,		
locating the plant and equipment as far as practicable from adjacent sensitive land uses.		
PO 1.5	DTS/DPF 1.5	
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form), taking into account the form of development contemplated in the relevant zone.	None are applicable.	
Sat	rety	
PO 2.1	DTS/DPF 2.1	
Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	None are applicable.	

Page 58 of 133 Printed on 1/02/2022

DTS/DPF 2.2

Development is designed to differentiate public, communal and private areas.	None are applicable.
PO 2.3	DTS/DPF 2.3
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.
PO 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.
Lands	caping
PO 3.1	DTS/DPF 3.1
Soft landscaping and tree planting are incorporated to:	None are applicable.
 (a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes. 	
Environmenta	l Performance
Environmenta PO 4.1	DTS/DPF 4.1
PO 4.1 Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable	DTS/DPF 4.1
PO 4.1 Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	DTS/DPF 4.1 None are applicable.
PO 4.1 Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces. PO 4.2 Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on	DTS/DPF 4.1 None are applicable. DTS/DPF 4.2
PO 4.1 Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces. PO 4.2 Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	DTS/DPF 4.1 None are applicable. DTS/DPF 4.2 None are applicable.
PO 4.1 Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces. PO 4.2 Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling. PO 4.3 Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	DTS/DPF 4.1 None are applicable. DTS/DPF 4.2 None are applicable. DTS/DPF 4.3
PO 4.1 Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces. PO 4.2 Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling. PO 4.3 Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	DTS/DPF 4.1 None are applicable. DTS/DPF 4.2 None are applicable. DTS/DPF 4.3 None are applicable.
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces. PO 4.2 Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling. PO 4.3 Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	DTS/DPF 4.1 None are applicable. DTS/DPF 4.2 None are applicable. DTS/DPF 4.3 None are applicable. itive Design
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces. PO 4.2 Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling. PO 4.3 Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells. Water Sens PO 5.1 Development is sited and designed to maintain natural hydrological	DTS/DPF 4.1 None are applicable. DTS/DPF 4.2 None are applicable. DTS/DPF 4.3 None are applicable. itive Design DTS/DPF 5.1

Page 59 of 133 Printed on 1/02/2022

On-site Waste Tr	eatment Systems
PO 6.1	DTS/DPF 6.1
Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.	(a) encroach within an area used as private open space or result in less private open space than that specified in Design in Urban Areas Table 1 - Private Open Space (b) use an area also used as a driveway (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.
Car parking	appearance
PO 7.1	DTS/DPF 7.1
Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on streetscapes through techniques such as: (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.	None are applicable.
PO 7.2	DTS/DPF 7.2
Vehicle parking areas appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.	None are applicable.
PO 7.3	DTS/DPF 7.3
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.
PO 7.4	DTS/DPF 7.4
Street-level vehicle parking areas incorporate tree planting to provide shade, reduce solar heat absorption and reflection.	Vehicle parking areas that are open to the sky and comprise 10 or more car parking spaces include a shade tree with a mature canopy of 4m diameter spaced for each 10 car parking spaces provided and a landscaped strip on any road frontage of a minimum dimension of 1m.
PO 7.5	DTS/DPF 7.5
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	Vehicle parking areas comprising 10 or more car parking spaces include soft landscaping with a minimum dimension of: (a) 1m along all public road frontages and allotment boundaries (b) 1m between double rows of car parking spaces.
PO 7.6	DTS/DPF 7.6
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.
	ı

Page 60 of 133 Printed on 1/02/2022

PO 7.7 DTS/DPF 7.7 Vehicle parking areas and access ways incorporate integrated None are applicable. stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Earthworks and sloping land DTS/DPF 8.1 PO 8 1 Development, including any associated driveways and access Development does not involve any of the following: tracks, minimises the need for earthworks to limit disturbance to (a) excavation exceeding a vertical height of 1m natural topography. (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. PO 8.2 DTS/DPF 8.2 Driveways and access tracks designed and constructed to allow Driveways and access tracks on sloping land (with a gradient safe and convenient access on sloping land. exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface. PO 8.3 DTS/DPF 8.3 Driveways and access tracks on sloping land (with a gradient None are applicable. exceeding 1 in 8): (a) do not contribute to the instability of embankments and (b) provide level transition areas for the safe movement of people and goods to and from the development are designed to integrate with the natural topography of the (c) PO 8.4 DTS/DPF 8.4 Development on sloping land (with a gradient exceeding 1 in 8) None are applicable. avoids the alteration of natural drainage lines and includes on site drainage systems to minimise erosion. PO 8.5 DTS/DPF 8.5 Development does not occur on land at risk of landslip or increase None are applicable. the potential for landslip or land surface instability. Fences and walls PO 9.1 DTS/DPF 9.1 Fences, walls and retaining walls of sufficient height maintain None are applicable. privacy and security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places. PO 9.2 DTS/DPF 9.2 Landscaping is incorporated on the low side of retaining walls that A vegetated landscaped strip 1m wide or more is provided against are visible from public roads and public open space to minimise the low side of a retaining wall. visual impacts.

Page 61 of 133 Printed on 1/02/2022

Overlooking / Visual Privacy (low rise buildings) PO 10.1 **DTS/DPF 10.1** Development mitigates direct overlooking from upper level windows Upper level windows facing side or rear boundaries shared with a to habitable rooms and private open spaces of adjoining residential residential use in a neighbourhood-type zone: uses in neighbourhood-type zones. are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 125mm (b) have sill heights greater than or equal to 1.5m above finished floor level (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level. PO 10.2 DTS/DPF 10.2 Development mitigates direct overlooking from balconies to One of the following is satisfied: habitable rooms and private open space of adjoining residential uses in neighbourhood type zones. the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land (ii) 1.7m above finished floor level in all other cases Site Facilities / Waste Storage (excluding low rise residential development) PO 11 1 DTS/DPF 11 1 Development provides a dedicated area for on-site collection and None are applicable. sorting of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection. DTS/DPF 11.2 PO 11.2 Communal waste storage and collection areas are located, None are applicable. enclosed and designed to be screened from view from the public domain, open space and dwellings. PO 11.3 **DTS/DPF 11.3** Communal waste storage and collection areas are designed to be None are applicable. well ventilated and located away from habitable rooms. PO 11.4 DTS/DPF 11.4 Communal waste storage and collection areas are designed to allow None are applicable. waste and recycling collection vehicles to enter and leave the site without reversing. PO 11.5 DTS/DPF 11.5 For mixed use developments, non-residential waste and recycling None are applicable. storage areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate. All Development - Medium and High Rise External Appearance

Page 62 of 133 Printed on 1/02/2022

Policy24 - Eriquity		
PO 12.1	DTS/DPF 12.1	
Buildings positively contribute to the character of the local area by responding to local context.	None are applicable.	
PO 12.2	DTS/DPF 12.2	
Architectural detail at street level and a mixture of materials at lower building levels near the public interface are provided to reinforce a human scale.	None are applicable.	
PO 12.3	DTS/DPF 12.3	
Buildings are designed to reduce visual mass by breaking up building elevations into distinct elements.	None are applicable.	
PO 12.4	DTS/DPF 12.4	
Boundary walls visible from public land include visually interesting treatments to break up large blank elevations.	None are applicable.	
PO 12.5	DTS/DPF 12.5	
External materials and finishes are durable and age well to minimise ongoing maintenance requirements.	Buildings utilise a combination of the following external materials and finishes:	
	 (a) masonry (b) natural stone (c) pre-finished materials that minimise staining, discolouring or deterioration. 	
PO 12.6	DTS/DPF 12.6	
Street-facing building elevations are designed to provide attractive, high quality and pedestrian-friendly street frontages.	Building street frontages incorporate: (a) active uses such as shops or offices (b) prominent entry areas for multi-storey buildings (where it is a common entry) (c) habitable rooms of dwellings (d) areas of communal public realm with public art or the like, where consistent with the zone and/or subzone provisions.	
PO 12.7	DTS/DPF 12.7	
Entrances to multi-storey buildings are safe, attractive, welcoming, functional and contribute to streetscape character.	Entrances to multi-storey buildings are: (a) oriented towards the street	
	(b) clearly visible and easily identifiable from the street and vehicle parking areas	
	(c) designed to be prominent, accentuated and a welcoming feature if there are no active or occupied ground floor uses	
	(d) designed to provide shelter, a sense of personal address and transitional space around the entry	
	(e) located as close as practicable to the lift and / or lobby access to minimise the need for long access corridors	
	 (f) designed to avoid the creation of potential areas of entrapment. 	
PO 12.8	DTS/DPF 12.8	
Building services, plant and mechanical equipment are screened from the public realm.	None are applicable.	

Page 63 of 133 Printed on 1/02/2022

Landscaping PO 13.1 **DTS/DPF 13.1** Development facing a street provides a well landscaped area that Buildings provide a 4m by 4m deep soil space in front of the contains a deep soil space to accommodate a tree of a species and building that accommodates a medium to large tree, except where size adequate to provide shade, contribute to tree canopy targets no building setback from front property boundaries is desired. and soften the appearance of buildings. PO 13.2 DTS/DPF 13.2 Deep soil zones are provided to retain existing vegetation or provide Multi-storey development provides deep soil zones and incorporates areas that can accommodate new deep root vegetation, including trees at not less than the following rates, except in a location or tall trees with large canopies to provide shade and soften the zone where full site coverage is desired. appearance of multi-storey buildings. Site area Minimum deep Tree / deep **Minimum** soil area dimension soil zones 1 small tree / $<300 \text{ m}^2$ $10 \, \text{m}^2$ 1.5m $10 \, \text{m}^2$ 300-1500 m² 7% site area 3m 1 medium tree $/30 \text{ m}^2$ >1500 m² 7% site area 6m 1 large or medium tree / $60 \, \text{m}^2$ Tree size and site area definitions Small tree 4-6m mature height and 2-4m canopy spread Medium tree 6-12m mature height and 4-8m canopy spread Large tree 12m mature height and >8m canopy spread Site area The total area for development site, not average area per dwelling PO 13.3 **DTS/DPF 13.3** Deep soil zones with access to natural light are provided to assist in None are applicable. maintaining vegetation health. PO 13.4 DTS/DPF 13.4 Unless separated by a public road or reserve, development sites Building elements of 3 or more building levels in height are set back adjacent to any zone that has a primary purpose of accommodating at least 6m from a zone boundary in which a deep soil zone area is low-rise residential development incorporate a deep soil zone along incorporated.

Environmental

the common boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or

more building levels in height.

Page 64 of 133 Printed on 1/02/2022

Policy24 - Eriquity		
PO 14.1	DTS/DPF 14.1	
Development minimises detrimental micro-climatic impacts on adjacent land and buildings.	None are applicable.	
PO 14.2	DTS/DPF 14.2	
Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells.	None are applicable.	
PO 14.3	DTS/DPF 14.3	
Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as: (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level.	None are applicable.	
Car F	Parking	
PO 15.1	DTS/DPF 15.1	
Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings.	Multi-level vehicle parking structures within buildings: (a) provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings.	
PO 15.2	DTS/DPF 15.2	
Multi-level vehicle parking structures within buildings complement the surrounding built form in terms of height, massing and scale.	None are applicable.	
Overlooking/	Visual Privacy	
PO 16.1	DTS/DPF 16.1	
Development mitigates direct overlooking of habitable rooms and private open spaces of adjacent residential uses in neighbourhood-type zones through measures such as:	None are applicable.	
 (a) appropriate site layout and building orientation (b) off-setting the location of balconies and windows of habitable rooms or areas with those of other buildings so that views are oblique rather than direct to avoid direct line of sight (c) building setbacks from boundaries (including building boundary to boundary where appropriate) that interrupt views or that provide a spatial separation between balconies or windows of habitable rooms 		

Page 65 of 133 Printed on 1/02/2022

(d)	screening devices that are integrated into the building design and have minimal negative effect on residents' or neighbours' amenity.
	A II

All residential development

Front elevations and passive surveillance

PO 17.1

Dwellings incorporate windows facing primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.

DTS/DPF 17.1

Each dwelling with a frontage to a public street:

- includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m
- (b) has an aggregate window area of at least 2m² facing the primary street.

PO 17.2

Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.

DTS/DPF 17.2

Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.

Outlook and Amenity

PO 18.1

Living rooms have an external outlook to provide a high standard of amenity for occupants.

DTS/DPF 18.1

A living room of a dwelling incorporates a window with an external outlook of the street frontage, private open space, public open space, or waterfront areas.

PO 18.2

Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.

DTS/DPF 18.2

None are applicable.

Ancillary Development

PO 19 1

Residential ancillary buildings are sited and designed to not detract from the streetscape or appearance of primary residential buildings on the site or neighbouring properties.

DTS/DPF 19.1

Ancillary buildings:

- (a) are ancillary to a dwelling erected on the same site
- (b) have a floor area not exceeding 60m2
- (c) are not constructed, added to or altered so that any part is situated:
 - (i) in front of any part of the building line of the dwelling to which it is ancillary

or

- (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
- (d) in the case of a garage or carport, the garage or carport:
 - is set back at least 5.5m from the boundary of the primary street
 - (ii) when facing a primary street or secondary street, has a total door / opening not exceeding:
 - A. for dwellings of single building level 7m in width or 50% of the site frontage, whichever is the lesser
 - B. for dwellings comprising two or more building levels at the building line fronting the same public street 7m in width

Page 66 of 133 Printed on 1/02/2022

- (e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
 - a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary
 - (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- (h) have a wall height or post height not exceeding 3m above natural ground level
- (i) have a roof height where no part of the roof is more than 5m above the natural ground level
- if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
 - i) a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
<150	10%
150-200	15%
201-450	20%
>450	25%

(ii) the amount of existing soft landscaping prior to the development occurring.

PO 19.2

Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision, car parking requirements or result in over-development of the site.

DTS/DPF 19.2

Ancillary buildings and structures do not result in:

- (a) less private open space than specified in Design in Urban Areas Table 1 - Private Open Space
- (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.

Page 67 of 133 Printed on 1/02/2022

PO 19.3

Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers.

DTS/DPF 19.3

The pump and/or filtration system is ancillary to a dwelling erected on the same site and is:

- enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment or
- (b) located at least 12m from the nearest habitable room located on an adjoining allotment.

Residential Development - Low Rise

External appearance

PO 20.1

Garaging is designed to not detract from the streetscape or appearance of a dwelling.

DTS/DPF 20.1

Garages and carports facing a street:

- (a) are situated so that no part of the garage or carport will be in front of any part of the building line of the dwelling
- (b) are set back at least 5.5m from the boundary of the primary street
- (c) have a garage door / opening width not exceeding 7m
- (d) have a garage door / opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at the building line fronting the same public street.

PO 20.2

Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common driveway areas.

DTS/DPF 20.2

Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway:

- (a) a minimum of 30% of the building wall is set back an additional 300mm from the building line
- a porch or portico projects at least 1m from the building wall
- (c) a balcony projects from the building wall
- (d) a verandah projects at least 1m from the building wall
- (e) eaves of a minimum 400mm width extend along the width of the front elevation
- (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm
- (g) a minimum of two different materials or finishes are incorporated on the walls of the front building elevation, with a maximum of 80% of the building elevation in a single material or finish.

PO 20.3 DTS/DPF 20.3

Page 68 of 133 Printed on 1/02/2022

PO 23.2

The visual mass of larger buildings is reduced when viewed from None are applicable adjoining allotments or public streets. Private Open Space PO 21.1 DTS/DPF 21.1 Dwellings are provided with suitable sized areas of usable private Private open space is provided in accordance with Design in Urban open space to meet the needs of occupants. Areas Table 1 - Private Open Space. PO 21.2 **DTS/DPF 21.2** Private open space is positioned to provide convenient access from Private open space is directly accessible from a habitable room. internal living areas. Landscaping DTS/DPF 22.1 PO 22.1 Soft landscaping is incorporated into development to: Residential development incorporates soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (a) minimise heat absorption and reflection (b): (b) contribute shade and shelter a total area as determined by the following table: (a) (c) provide for stormwater infiltration and biodiversity (d) enhance the appearance of land and streetscapes. Dwelling site area (or in the case Minimum of residential flat building or group percentage of dwelling(s), average site area) (m²) site <150 10% 150-200 15% >200-450 20% >450 25% (b) at least 30% of any land between the primary street boundary and the primary building line. Car parking, access and manoeuvrability PO 23.1 DTS/DPF 23.1 Enclosed car parking spaces are of dimensions to be functional, Residential car parking spaces enclosed by fencing, walls or other accessible and convenient. structures have the following internal dimensions (separate from any waste storage area): single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m a minimum garage door width of 2.4m double width car parking spaces (side by side): (b) (i) a minimum length of 5.4m (ii) a minimum width of 5.4m minimum garage door width of 2.4m per space.

Page 69 of 133 Printed on 1/02/2022

DTS/DPF 23.2

Uncovered car parking space are of dimensions to be functional, Uncovered car parking spaces have: accessible and convenient. (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m. PO 23.3 **DTS/DPF 23.3** Driveways and access points are located and designed to facilitate Driveways and access points satisfy (a) or (b): safe access and egress while maximising land available for street sites with a frontage to a public road of 10m or less, have tree planting, domestic waste collection, landscaped street a width between 3.0 and 3.2 metres measured at the frontages and on-street parking. property boundary and are the only access point provided on the site (b) sites with a frontage to a public road greater than 10m: have a maximum width of 5m measured at the property boundary and are the only access point provided on the site; (ii) have a width between 3.0 metres and 3.2 metres measured at the property boundary and no more than two access points are provided on site, separated by no less than 1m. PO 23.4 DTS/DPF 23.4 Vehicle access is safe, convenient, minimises interruption to the Vehicle access to designated car parking spaces satisfy (a) or (b): operation of public roads and does not interfere with street is provided via a lawfully existing or authorised access infrastructure or street trees. point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads outside of the marked lines or infrastructure dedicating a pedestrian crossing. PO 23.5 **DTS/DPF 23.5** Driveways are designed to enable safe and convenient vehicle Driveways are designed and sited so that: movements from the public road to on-site parking spaces. (a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1-in-4 on average they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site

Page 70 of 133 Printed on 1/02/2022

Policy24 - Enquiry PO 23.6 **DTS/DPF 23.6** Driveways and access points are designed and distributed to Where on-street parking is available abutting the site's street optimise the provision of on-street visitor parking. frontage, on-street parking is retained in accordance with the following requirements: (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. Waste storage PO 24.1 DTS/DPF 24.1 Provision is made for the convenient storage of waste bins in a Where dwellings abut both side boundaries a waste bin storage location screened from public view. area is provided behind the building line of each dwelling that: has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space); and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street. Design of Transportable Buildings DTS/DPF 25.1 PO 25.1 The sub-floor space beneath transportable buildings is enclosed to Buildings satisfy (a) or (b): give the appearance of a permanent structure. (a) are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building. Residential Development - Medium and High Rise (including serviced apartments) Outlook and Visual Privacy PO 26.1 DTS/DPF 26.1 Ground level dwellings have a satisfactory short range visual outlook Buildings: to public, communal or private open space. (a) provide a habitable room at ground or first level with a window facing toward the street limit the height / extent of solid walls or fences facing the street to 1.2m high above the footpath level or, where higher, to 50% of the site frontage. DTS/DPF 26.2 PO 26.2

Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.

Private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space.

Private Open Space

DTS/DPF 27 1

The finished floor level of ground level dwellings in multi-storey

developments is raised by up to 1.2m.

The visual privacy of ground level dwellings within multi-level

buildings is protected.

PO 27 1

Page 71 of 133 Printed on 1/02/2022

Residential amenity in multi-level buildings		
PO 28.1	DTS/DPF 28.1	
Residential accommodation within multi-level buildings have habitable rooms, windows and balconies designed and positioned to be separated from those of other dwellings and accommodation to provide visual and acoustic privacy and allow for natural ventilation and the infiltration of daylight into interior and outdoor spaces.	Habitable rooms and balconies of independent dwellings and accommodation are separated by at least 6m from one another where there is a direct line of sight between them and 3m or more from a side or rear property boundary.	
PO 28.2	DTS/DPF 28.2	
Balconies are designed, positioned and integrated into the overall architectural form and detail of the development to:	Balconies utilise one or a combination of the following design elements:	
(a) respond to daylight, wind, and acoustic conditions to maximise comfort and provide visual privacy (b) allow views and casual surveillance of the street while providing for safety and visual privacy of nearby living spaces and private outdoor areas.	(a) sun screens (b) pergolas (c) louvres (d) green facades (e) openable walls.	
PO 28.3	DTS/DPF 28.3	
Balconies are of sufficient size and depth to accommodate outdoor seating and promote indoor / outdoor living.	Balconies open directly from a habitable room and incorporate a minimum dimension of 2m.	
PO 28.4	DTS/DPF 28.4	
Dwellings are provided with sufficient space for storage to meet likely occupant needs.	Dwellings (not including student accommodation or serviced apartments) are provided with storage at the following rates with at least 50% or more of the storage volume to be provided within the dwelling:	
	(a) studio: not less than 6m ³	
	(b) 1 bedroom dwelling / apartment: not less than 8m ³	
	(c) 2 bedroom dwelling / apartment: not less than 10m ³	
	(d) 3+ bedroom dwelling / apartment: not less than 12m ³ .	
PO 28.5	DTS/DPF 28.5	
Dwellings that use light wells for access to daylight, outlook and	Light wells:	
ventilation for habitable rooms, are designed to ensure a reasonable living amenity is provided.	(a) are not used as the primary source of outlook for living rooms	
	(b) up to 18m in height have a minimum horizontal dimension of 3m, or 6m if overlooked by bedrooms	
	(c) above 18m in height have a minimum horizontal dimension of 6m, or 9m if overlooked by bedrooms.	
PO 28.6	DTS/DPF 28.6	
Attached or abutting dwellings are designed to minimise the transmission of sound between dwellings and, in particular, to protect bedrooms from possible noise intrusions.	None are applicable.	
PO 28.7	DTS/DPF 28.7	
Dwellings are designed so that internal structural columns	None are applicable.	
correspond with the position of internal walls to ensure that the		
space within the dwelling/apartment is useable.		
Dwelling C	onfiguration	

Page 72 of 133 Printed on 1/02/2022

PO 29.1

Buildings containing in excess of 10 dwellings provide a variety of dwelling sizes and a range in the number of bedrooms per dwelling to contribute to housing diversity.

DTS/DPF 29.1

Buildings containing in excess of 10 dwellings provide at least one of each of the following:

- (a) studio (where there is no separate bedroom)
- (b) 1 bedroom dwelling / apartment with a floor area of at least 50m²
- (c) 2 bedroom dwelling / apartment with a floor area of at least 65m²
- (d) 3+ bedroom dwelling / apartment with a floor area of at least 80m², and any dwelling over 3 bedrooms provides an additional 15m² for every additional bedroom.

PO 29.2

Dwellings located on the ground floor of multi-level buildings with 3 or more bedrooms have the windows of their habitable rooms overlooking internal courtyard space or other public space, where possible.

DTS/DPF 29.2

None are applicable.

Common Areas

PO 30.1

The size of lifts, lobbies and corridors is sufficient to accommodate movement of bicycles, strollers, mobility aids and visitor waiting areas.

DTS/DPF 30.1

Common corridor or circulation areas:

- (a) have a minimum ceiling height of 2.7m
- (b) provide access to no more than 8 dwellings
- (c) incorporate a wider section at apartment entries where the corridors exceed 12m in length from a core.

Group Dwellings, Residential Flat Buildings and Battle axe Development

Amenity

PO 31.1

Dwellings are of a suitable size to provide a high standard of amenity for occupants.

DTS/DPF 31.1

Dwellings have a minimum internal floor area in accordance with the following table:

Number of bedrooms	Minimum internal floor area
Studio	35m ²
1 bedroom	50m ²
2 bedroom	65m ²
3+ bedrooms	80m ² and any dwelling over 3 bedrooms provides an additional 15m ² for every additional bedroom

PO 31.2

The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.

DTS/DPF 31.2

None are applicable.

Page 73 of 133 Printed on 1/02/2022

Policy24 - Enquiry			
PO 31.3	DTS/DPF 31.3		
Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.	None are applicable.		
PO 31.4	DTS/DPF 31.4		
Battle-axe development is appropriately sited and designed to	Dwelling sites/allotments are not in the form of a battle-axe		
respond to the existing neighbourhood context.	arrangement.		
Communal	Open Space		
PO 32.1	DTS/DPF 32.1		
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.		
PO 32.2	DTS/DPF 32.2		
Communal open space is of sufficient size and dimensions to cater	Communal open space incorporates a minimum dimension of 5		
for group recreation.	metres.		
PO 32.3	DTS/DPF 32.3		
Communal open space is designed and sited to:	None are applicable.		
(a) be conveniently accessed by the dwellings which it services			
(b) have regard to acoustic, safety, security and wind effects.			
PO 32.4	DTS/DPF 32.4		
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.		
PO 32.5	DTS/DPF 32.5		
Communal open space is designed and sited to:	None are applicable.		
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings			
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.			
Car parking, access	and manoeuvrability		
PO 33.1	DTS/DPF 33.1		
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on- street parking is retained adjacent the subject site in accordance with the following requirements:		
	(a) minimum 0.33 on-street car parks per proposed dwelling (rounded up to the nearest whole number)		
	(b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly		
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.		
PO 33.2	DTS/DPF 33.2		
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.		

Page 74 of 133 Printed on 1/02/2022

DTS/DPF 33.3 PO 33.3 Residential driveways that service more than one dwelling are Driveways that service more than 1 dwelling or a dwelling on a designed to allow safe and convenient movement. battle-axe site: have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m. PO 33.4 **DTS/DPF 33.4** Driveways providing access to more than one dwelling, or a Residential driveways that service more than one dwelling or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter dwelling on a battle-axe site are designed to allow passenger and exit the garages or parking spaces in no more than a threevehicles to enter and exit and manoeuvre within the site in a safe point turn manoeuvre. and convenient manner. PO 33.5 DTS/DPF 33 5 Dwellings are adequately separated from common driveways and Dwelling walls with entry doors or ground level habitable room manoeuvring areas. windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles. Soft landscaping PO 34.1 DTS/DPF 34.1 Soft landscaping is provided between dwellings and common Other than where located directly in front of a garage or building driveways to improve the outlook for occupants and appearance of entry, soft landscaping with a minimum dimension of 1m is provided common areas. between a dwelling and common driveway. DTS/DPF 34.2 PO 34.2 Battle-axe or common driveways incorporate landscaping and Battle-axe or common driveways satisfy (a) and (b): permeability to improve appearance and assist in stormwater (a) are constructed of a minimum of 50% permeable or management. porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing Site Facilities / Waste Storage DTS/DPF 35.1 PO 35 1 Provision is made for suitable mailbox facilities close to the major None are applicable. pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 35.2 DTS/DPF 35.2 Provision is made for suitable external clothes drying facilities. None are applicable. PO 35.3 **DTS/DPF 35.3** Provision is made for suitable household waste and recyclable None are applicable. material storage facilities which are:

Page 75 of 133 Printed on 1/02/2022

, , , , , , , , , , , , , , , , , , , ,		
 (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. 		
PO 35.4	DTS/DPF 35.4	
Waste and recyclable material storage areas are located away from dwellings.		
PO 35.5	DTS/DPF 35.5	
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.	
PO 35.6	DTS/DPF 35.6	
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.	
Water sensitiv	e urban design	
PO 36.1	DTS/DPF 36.1	
Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.	
PO 36.2	DTS/DPF 36.2	
Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
Supported Accommodation	on and retirement facilities	
Siting, Configura	ation and Design	
PO 37.1	DTS/DPF 37.1	
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.	
PO 37.2	DTS/DPF 37.2	
Universal design features are incorporated to provide options for people living with disabilities or limited mobility and / or to facilitate ageing in place.	None are applicable.	
Movement	and Access	
PO 38.1	DTS/DPF 38.1	
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.	
(a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for		

Page 76 of 133 Printed on 1/02/2022

Policy24 - Enquiry		
the passing of wheelchairs and resting places		
(c) car parks with gradients no steeper than 1-in-40, and of		
sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points.		
(d) kerb ramps at pedestrian crossing points.		
Communal (Open Space	
PO 39.1	DTS/DPF 39.1	
Development is designed to provide attractive, convenient and	None are applicable.	
comfortable indoor and outdoor communal areas to be used by		
residents and visitors.		
PO 39.2	DTS/DPF 39.2	
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and	None are applicable.	
amenity needs of residents.		
PO 39.3	DTS/DPF 39.3	
Communal open space is of sufficient size and dimensions to cater	Communal open space incorporates a minimum dimension of 5	
for group recreation.	metres.	
PO 39.4	DTS/DPF 39.4	
Communal open space is designed and sited to:	None are applicable.	
(a) be conveniently accessed by the dwellings which it		
services		
(b) have regard to acoustic, safety, security and wind effects.		
PO 39.5	DTS/DPF 39.5	
Communal open space contains landscaping and facilities that are	None are applicable.	
functional, attractive and encourage recreational use.		
PO 39.6	DTS/DPF 39.6	
Communal open space is designed and sited to:	None are applicable.	
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the		
useable private open space of other dwellings		
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.		
by habitable rooms to facilitate passive surveillance.		
Site Facilities /	Waste Storage	
PO 40.1	DTS/DPF 40.1	
Development is designed to provide storage areas for personal	None are applicable.	
items and specialised equipment such as small electric powered		
vehicles, including facilities for the recharging of small electric-		
powered vehicles.		
PO 40.2	DTS/DPF 40.2	
Provision is made for suitable mailbox facilities close to the major	None are applicable.	
pedestrian entry to the site or conveniently located considering the		
nature of accommodation and mobility of occupants.		
PO 40.3	DTS/DPF 40.3	

Page 77 of 133 Printed on 1/02/2022

Policy24 - Enquiry			
Provision is made for suitable external clothes drying facilities.	None are applicable.		
PO 40.4	DTS/DPF 40.4		
Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view.	None are applicable.		
PO 40.5	DTS/DPF 40.5		
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.		
PO 40.6	DTS/DPF 40.6		
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.		
PO 40.7	DTS/DPF 40.7		
Services, including gas and water meters, are conveniently located and screened from public view.	None are applicable.		
Student Acc	commodation		
PO 41.1	DTS/DPF 41.1		
Student accommodation is designed to provide safe, secure, attractive, convenient and comfortable living conditions for residents, including an internal layout and facilities that are designed to provide sufficient space and amenity for the requirements of student life and promote social interaction.	Student accommodation provides: (a) a range of living options to meet a variety of accommodation needs, such as one-bedroom, two-bedroom and disability access units (b) common or shared facilities to enable a more efficient use of space, including: (i) shared cooking, laundry and external drying facilities (ii) internal and external communal and private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space (iii) common storage facilities at the rate of 8m³ for every 2 dwellings or students (iv) common on-site parking in accordance with Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas (v) bicycle parking at the rate of one space for every 2 students.		
PO 41.2	DTS/DPF 41.2		
Student accommodation is designed to provide easy adaptation of the building to accommodate an alternative use of the building in the event it is no longer required for student housing.	None are applicable.		
All non-resident	tial development		
Water Sens	sitive Design		
PO 42.1	DTS/DPF 42.1		
Development likely to result in risk of export of sediment, suspended solids, organic matter, nutrients, oil and grease include stormwater			

Page 78 of 133 Printed on 1/02/2022

Policy24	- Enquiry	•	
manage stormwa	-	stems designed to minimise pollutants entering	
PO 42.2			DTS/DPF 42.2
chemic	Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.		None are applicable.
PO 42.3			DTS/DPF 42.3
peak flo	ows and r ges from	cludes stormwater management systems to mitigate manage the rate and duration of stormwater the site to ensure that development does not ows in downstream systems.	None are applicable.
		Wash-down and Waste	Loading and Unloading
PO 43.1			DTS/DPF 43.1
waste r wash-d	efuse bin	es including loading and unloading, storage of as in commercial and industrial development or as used for the cleaning of vehicles, plant or	None are applicable.
(a)	stormw	ed to contain all wastewater likely to pollute ater within a bunded and roofed area to exclude the f external surface stormwater run-off	
(b)	paved v	with an impervious material to facilitate wastewater	
(c)	(c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area		
(d)	are des	igned to drain wastewater to either:	
	(i)	a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or	
	(ii)	a holding tank and its subsequent removal off-site on a regular basis.	

Laneway Development

Infrastructure and Access

PO 44.1

Development with a primary street comprising a laneway, alley, lane, right of way or similar minor thoroughfare only occurs where:

- (a) existing utility infrastructure and services are capable of accommodating the development
- (b) the primary street can support access by emergency and regular service vehicles (such as waste collection)
- (c) it does not require the provision or upgrading of infrastructure on public land (such as footpaths and stormwater management systems)
- (d) safety of pedestrians or vehicle movement is maintained
- (e) any necessary grade transition is accommodated within the site of the development to support an appropriate development intensity and orderly development of land fronting minor thoroughfares.

DTS/DPF 44.1

Development with a primary street frontage that is not an alley, lane, right of way or similar public thoroughfare.

Page 79 of 133 Printed on 1/02/2022

Table 1 - Private Open Space

Dwelling Type	Dwelling / Site Configuration	Minimum Rate
Dwelling (at ground level, other than a residential flat building that includes above ground dwellings)		Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Cabin or caravan (permanently fixed to the ground) in a residential park or caravan and tourist park		Total area: 16m ² , which may be uses as second car parking space, provided on each site intended for residential occupation.
Dwelling in a residential flat building or mixed use building which incorporate	Dwellings at ground level:	15m ² / minimum dimension 3m
above ground level dwellings	Dwellings above ground level:	
	Studio (no separate bedroom)	4m ² / minimum dimension 1.8m
	One bedroom dwelling	8m ² / minimum dimension 2.1m
	Two bedroom dwelling	11m ² / minimum dimension 2.4m
	Three + bedroom dwelling	15 m ² / minimum dimension 2.6m

Forestry

Assessment Provisions (AP)

	Desired Outcome
DO 1	Commercial forestry is designed and sited to maximise economic benefits whilst managing potential negative impacts on the environment, transport networks, surrounding land uses and landscapes.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome Deemed-to-Satisfy Criteria /

Page 80 of 133 Printed on 1/02/2022

	Designated Performance	
	Feature	
	ting	
PO 1.1	DTS/DPF 1.1	
Commercial forestry plantations are established where there is no detrimental effect on the physical environment or scenic quality of the rural landscape.	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Commercial forestry plantations are established on slopes that are stable to minimise the risk of soil erosion.	Commercial forestry plantations are not located on land with a slopexceeding 20% (1-in-5).	
PO 1.3	DTS/DPF 1.3	
Commercial forestry plantations and operations associated with their establishment, management and harvesting are appropriately set back from any sensitive receiver to minimise fire risk and noise disturbance.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50 or more from any sensitive receiver.	
PO 1.4	DTS/DPF 1.4	
Commercial forestry plantations are separated from reserves gazetted under the <i>National Parks and Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> to minimise fire risk and potential for weed infestation.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50 or more from a reserve gazetted under the <i>National Parks and Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> .	
Water F	rotection	
PO 2.1	DTS/DPF 2.1	
Commercial forestry plantations incorporate artificial drainage lines (i.e. culverts, runoffs and constructed drains) integrated with natural drainage lines to minimise concentrated water flows onto or from plantation areas.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Appropriate siting, layout and design measures are adopted to minimise the impact of commercial forestry plantations on surface water resources.	(a) do not involve cultivation (excluding spot cultivation) in drainage lines (b) are set back 20m or more from the banks of any major watercourse (a third order or higher watercourse), lake, reservoir, wetland or sinkhole (with direct connection to an aquifer) (c) are set back 10m or more from the banks of any first or	
	second order watercourse or sinkhole (with no direct connection to an aquifer).	
	nagement T	
PO 3.1	DTS/DPF 3.1	
Commercial forestry plantations incorporate appropriate firebreaks and fire management design elements.	Commercial forestry plantations provide:	
	 (a) 7m or more wide external boundary firebreaks for plantations of 40ha or less (b) 10m or more wide external boundary firebreaks for plantations of between 40ha and 100ha 	

Page 81 of 133 Printed on 1/02/2022

Policy24 - Enquiry			
		al 10m or mor	oundary firebreaks, or 10m e of fuel-reduced plantation, eater.
PO 3.2	DTS/DPF 3.2		
Commercial forestry plantations incorporate appropriate fire management access tracks.	Commercial forestry plan	ntation fire ma	nagement access tracks:
S	(a) are incorporate	d within all fire	breaks
	(b) are 7m or more more	wide with a v	ertical clearance of 4m or
	or if they are a	no through ac provide suital	through access at junctions, cess track are appropriately ble turnaround areas for fire-
	(d) partition the pla	ntation into un	its of 40ha or less in area.
Power-li	ne Clearances		
PO 4.1	DTS/DPF 4.1	DTS/DPF 4.1	
Commercial forestry plantations achieve and maintain appropriate clearances from aboveground powerlines. Commercial forestry plantations incorporate expected mature height of greater than 6r requirements listed in the following table:		6m meet the clearance	
	Voltage of transmission line	Tower or Pole	Minimum horizontal clearance distance between plantings and transmission lines
	500 kV	Tower	38m
	275 kV	Tower	25m
	132 kV	Tower	30m
	132 kV	Pole	20m
	66 kV	Pole	20m
	Less than 66 kV	Pole	20m

Housing Renewal

Assessment Provisions (AP)

Desired Outcome		
DO 1	Renewed residential environments replace older social housing and provide new social housing infrastructure and other housing options and tenures to enhance the residential amenity of the local area.	

Page 82 of 133 Printed on 1/02/2022

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Land Use a	and Intensity	
PO 1.1	DTS/DPF 1.1	
Residential development provides a range of housing choices.	Development comprises one or more of the following:	
	 (a) detached dwellings (b) semi-detached dwellings (c) row dwellings (d) group dwellings (e) residential flat buildings. 	
PO 1.2	DTS/DPF 1.2	
Medium-density housing options or higher are located in close proximity to public transit, open space and/or activity centres.	None are applicable.	
Building	g Height	
PO 2.1	DTS/DPF 2.1	
Buildings generally do not exceed 3 building levels unless in locations close to public transport, centres and/or open space.	Building height (excluding garages, carports and outbuildings) does not exceed 3 building levels and 12m and wall height does not exceed 9m (not including a gable end).	
PO 2.2	DTS/DPF 2.2	
Medium or high rise residential flat buildings located within or at the interface with zones which restrict heights to a maximum of 2 building levels transition down in scale and height towards the boundary of that zone, other than where it is a street boundary.	None are applicable.	
Primary Str	reet Setback	
PO 3.1	DTS/DPF 3.1	
Buildings are set back from the primary street boundary to contribute to an attractive streetscape character.	Buildings are no closer to the primary street (excluding any balcony, verandah, porch, awning or similar structure) than 3m.	
Secondary S	treet Setback	
PO 4.1	DTS/DPF 4.1	
Buildings are set back from secondary street boundaries to maintain separation between building walls and public streets and contribute to a suburban streetscape character.	Buildings are set back at least 900mm from the boundary of the allotment with a secondary street frontage.	
Bounda	ury Walls	
PO 5.1	DTS/DPF 5.1	
Boundary walls are limited in height and length to manage visual impacts and access to natural light and ventilation.	Except where the dwelling is located on a central site within a row dwelling or terrace arrangement, dwellings with side boundary walls are sited on only one side boundary and satisfy (a) or (b):	

Page 83 of 133 Printed on 1/02/2022

Policy24 - Enquiry adjoin or abut a boundary wall of a building on adjoining (a) land for the same length and height (b) do not: exceed 3.2m in height from the lower of the (i) natural or finished ground level (ii) exceed 11.5m in length when combined with other walls on the boundary of the subject development site, a maximum 45% of the length of the boundary encroach within 3 metres of any other existing or proposed boundary walls on the subject land. PO 5.2 DTS/DPF 5.2 Dwellings in a semi-detached or row arrangement are set back Dwellings in a semi-detached, row or terrace arrangement maintain space between buildings consistent with a suburban streetscape 900mm or more from side boundaries shared with allotments character. outside the development site, except for a carport or garage. Side Boundary Setback PO 6.1 DTS/DPF 6.1 Other than walls located on a side boundary, buildings are set back Buildings are set back from side boundaries to provide: from side boundaries: (a) separation between dwellings in a way that contributes to a suburban character at least 900mm where the wall height is up to 3m (b) access to natural light and ventilation for neighbours. (b) other than for a wall facing a southern side boundary, at least 900mm plus 1/3 of the wall height above 3m (c) at least 1.9m plus 1/3 of the wall height above 3m for walls facing a southern side boundary. Rear Boundary Setback PO 7.1 DTS/DPF 7.1 Buildings are set back from rear boundaries to provide: Dwellings are set back from the rear boundary: (a) separation between dwellings in a way that contributes to a 3m or more for the first building level (a) suburban character (b) 5m or more for any subsequent building level. (b) access to natural light and ventilation for neighbours (c) private open space (d) space for landscaping and vegetation. Buildings elevation design PO 8.1 DTS/DPF 8.1 Dwelling elevations facing public streets and common driveways Each dwelling includes at least 3 of the following design features make a positive contribution to the streetscape and common within the building elevation facing a primary street, and at least 2

driveway areas.

of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway:

- a minimum of 30% of the building elevation is set back an additional 300mm from the building line
- a porch or portico projects at least 1m from the building elevation
- (c) a balcony projects from the building elevation
- (d) a verandah projects at least 1m from the building elevation
- (e) eaves of a minimum 400mm width extend along the width

Page 84 of 133 Printed on 1/02/2022

	of the front elevation (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm. (g) a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the building elevation in a single material or finish.			
PO 8.2	DTS/DPF 8.2			
Dwellings incorporate windows along primary street frontages to	Each dwelling with a frontage to a public street:			
encourage passive surveillance and make a positive contribution to the streetscape.	(a) includes at least one window facing the primary street fro a habitable room that has a minimum internal room dimension of 2.4m			
	(b) has an aggregate window area of at least 2m ² facing the primary street			
PO 8.3	DTS/DPF 8.3			
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.				
PO 8.4	DTS/DPF 8.4			
Built form considers local context and provides a quality design response through scale, massing, materials, colours and architectural expression.	None are applicable.			
PO 8.5	DTS/DPF 8.5			
Entrances to multi-storey buildings are:	None are applicable.			
 (a) oriented towards the street (b) visible and easily identifiable from the street (c) designed to include a common mail box structure. 				
Outlook a	I and amenity			
PO 9.1	DTS/DPF 9.1			
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an external outlook towards the street frontage or private open space.			
PO 9.2	DTS/DPF 9.2			
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.			
Private C	Open Space			
PO 10.1	DTS/DPF 10.1			
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space is provided in accordance with the following table:			
Dwelling Type Dwelling / Site Minimum F Configuration				

Page 85 of 133 Printed on 1/02/2022

	Dwelling (at ground level)		Total area: 24m ² located behind the building line Minimum adjacent to a living room: 16m ² with a minimum dimension 3m	
	Dwelling (above ground level)	Studio	4m ² / minimum dimension 1.8m	
		One bedroom dwelling	8m ² / minimum dimension 2.1m	
		Two bedroom dwelling	11m ² / minimum dimension 2.4m	
		Three + bedroom dwelling	15 m ² / minimum dimension 2.6m	
PO 10.2	DTS/DPF 10.2			
Private open space positioned to provide convenient access from internal living areas.	At least 50% of the required area of private open space is accessible from a habitable room.			
PO 10.3	DTS/DPF 10.3			
Private open space is positioned and designed to:	None are applicable.			
 (a) provide useable outdoor space that suits the needs of occupants; (b) take advantage of desirable orientation and vistas; and (c) adequately define public and private space. 				
Visual	privacy			
PO 11.1	DTS/DPF 11.1			
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.	another residential a	allotment/site satisfy o	_	
	 (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm 			
	(b) have sill heights greater than or equal to 1.5m above finished floor level			
	(c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5m above the finished floor.			
PO 11.2	DTS/DPF 11.2			
Development mitigates direct overlooking from upper level balconies	One of the following	is satisfied:		
and terraces to habitable rooms and private open space of adjoining residential uses.	(a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or			
2200 86 of 133			Printed on 1/02/2022	

Page 86 of 133 Printed on 1/02/2022

all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land (ii) 1.7m above finished floor level in all other cases Landscaping **DTS/DPF 12.1** PO 12.1 Soft landscaping is incorporated into development to: Residential development incorporates pervious areas for soft landscaping with a minimum dimension of 700mm provided in (a) minimise heat absorption and reflection accordance with (a) and (b): (b) maximise shade and shelter a total area as determined by the following table: (c) maximise stormwater infiltration and biodiversity (d) enhance the appearance of land and streetscapes. Dwelling site area (or in the case of residential flat Minimum building or group dwelling(s), average site area) percentage of site (m²)<150 10% <200 15% 200-450 20% >450 25% (b) at least 30% of land between the road boundary and the building line. Water Sensitive Design PO 13.1 **DTS/DPF 13.1** Residential development is designed to capture and use stormwater None are applicable. to: (a) maximise efficient use of water resources (b) manage peak stormwater runoff flows and volume to ensure the carrying capacities of downstream systems are not overloaded (c) manage runoff quality to maintain, as close as practical, pre-development conditions. Car Parking **DTS/DPF 14.1** PO 14.1 On-site car parking is provided to meet the anticipated demand of On-site car parking is provided at the following rates per dwelling: residents, with less on-site parking in areas in close proximity to 2 or fewer bedrooms - 1 car parking space public transport. (b) 3 or more bedrooms - 2 car parking spaces. PO 14.2 **DTS/DPF 14.2** Enclosed car parking spaces are of dimensions to be functional, Residential parking spaces enclosed by fencing, walls or other accessible and convenient. obstructions with the following internal dimensions (separate from any waste storage area): (a) single parking spaces:

Page 87 of 133 Printed on 1/02/2022

a minimum length of 5.4m

i onoya i anguny	1	
	(ii) a minimum width of 3.0m	
	(iii) a minimum garage door width of 2.4m	
	(b) double parking spaces (side by side):	
	(i) a minimum length of 5.4m	
	(ii) a minimum width of 5.5m	
	(iii) minimum garage door width of 2.4m per space.	
PO 14.3	DTS/DPF 14.3	
Uncovered car parking spaces are of dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have:	
	(a) a minimum length of 5.4m	
	(b) a minimum width of 2.4m	
	(c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.	
PO 14.4	DTS/DPF 14.4	
Residential flat buildings and group dwelling developments provide	Visitor car parking for group and residential flat buildings	
sufficient on-site visitor car parking to cater for anticipated demand.	incorporating 4 or more dwellings is provided on-site at a minimum ratio of 0.25 car parking spaces per dwelling.	
PO 14.5	DTS/DPF 14.5	
Residential flat buildings provide dedicated areas for bicycle	Residential flat buildings provide one bicycle parking space per	
parking.	dwelling.	
Oversh	adowing	
PO 15.1 DTS/DPF 15.1		
Development minimises overshadowing of the private open spaces	None are applicable.	
of adjoining land by ensuring that ground level open space associated with residential buildings receive direct sunlight for a		
minimum of 2 hours between 9am and 3pm on 21 June.		
W	aste	
PO 16.1	DTS/DPF 16.1	
Provision is made for the convenient storage of waste bins in a location screened from public view.	A waste bin storage area is provided behind the primary building line that:	
	(a) has a minimum area of 2m ² with a minimum dimension of 900mm (separate from any designated car parking spaces	
	or private open space).; and	
	(b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage	
	area and the street.	
PO 16.2	DTS/DPF 16.2	
Residential flat buildings provide a dedicated area for the on-site storage of waste which is:	None are applicable.	
(a) easily and safely accessible for residents and for		
collection vehicles		
•		

Page 88 of 133 Printed on 1/02/2022

waste storage needs of the development considering the intensity and nature of the development and the frequency of collection.			
Vehicle	e Access		
PO 17.1 Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages and on-street parking.	DTS/DPF 17.1 None are applicable.		
PO 17.2	DTS/DPF 17.2		
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.		
PO 17.3	DTS/DPF 17.3		
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	Driveways are designed and sited so that: (a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not more than 1-in-4 on average (b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. (c) if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site.		
PO 17.4	DTS/DPF 17.4		
Driveways and access points are designed and distributed to optimise the provision of on-street parking.	 Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following requirements: 1. minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) 2. Minimum car park length of 5.4m where a vehicle can enter or exit a space directly 3. minimum car park length of 6m for an intermediate space located between two other parking spaces. 		
PO 17.5	DTS/DPF 17.5		

Page 89 of 133 Printed on 1/02/2022

Residential driveways that service more than one dwelling of a dimension to allow safe and convenient movement.	Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following requirements: (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.			
PO 17.6	DTS/DPF 17.6			
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to ente and exit the garages or parking spaces in no more than a three-point turn manoeuvre			
PO 17.7	DTS/DPF 17.7			
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.			
Sto	prage			
PO 18.1	DTS/DPF 18.1			
Dwellings are provided with sufficient and accessible space for storage to meet likely occupant needs.	Dwellings are provided with storage at the following rates and 50% or more of the storage volume is provided within the dwelling:			
	(a) studio: not less than 6m ³			
	(b) 1 bedroom dwelling / apartment: not less than 8m ³			
	(c) 2 bedroom dwelling / apartment: not less than 10m ³			
	(d) 3+ bedroom dwelling / apartment: not less than 12m ³ .			
Earth	nworks			
PO 19.1	DTS/DPF 19.1			
Development, including any associated driveways and access	The development does not involve:			
tracks, minimises the need for earthworks to limit disturbance to natural topography.	(a) excavation exceeding a vertical height of 1m or			
	(b) filling exceeding a vertical height of 1m			
	or (c) a total combined excavation and filling vertical height exceeding 2m.			
Service connection	ns and infrastructure			
PO 20.1	DTS/DPF 20.1			
Dwellings are provided with appropriate service connections and infrastructure.	The site and building:			
	(a) have the ability to be connected to a permanent potable water supply			
	(b) have the ability to be connected to a sewerage system, or a wastewater system approved under the South Australian Public Health Act 2011			
	(c) have the ability to be connected to electricity supply			
	(d) have the ability to be connected to an adequate water			

Page 90 of 133 Printed on 1/02/2022 supply (and pressure) for fire-fighting purposes

(e) would not be contrary to the Regulations prescribed for the purposes of Section 86 of the *Electricity Act 1996*.

Site contamination

PO 21.1

Land that is suitable for sensitive land uses to provide a safe environment.

DTS/DPF 21.1

Development satisfies (a), (b), (c) or (d):

- (a) does not involve a change in the use of land
- (b) involves a change in the use of land that does not constitute a change to a <u>more sensitive use</u>
- (c) involves a change in the use of land to a <u>more sensitive</u>
 <u>use</u> on land at which <u>site contamination</u> does not exist (as demonstrated in a <u>site contamination declaration form</u>)
- (d) involves a change in the use of land to a <u>more sensitive</u> <u>use</u> on land at which <u>site contamination</u> exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following:
 - (i) <u>a site contamination audit report</u> has been prepared under Part 10A of the *Environment Protection Act 1993* in relation to the land within the previous 5 years which states that
 - <u>site contamination</u> does not exist (or no longer exists) at the land or
 - B. the land is suitable for the proposed use or range of uses (without the need for any further <u>remediation</u>)
 - C. where <u>remediation</u> is, or remains, necessary for the proposed use (or range of uses), <u>remediation work</u> has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)

and

(ii) no other <u>class 1 activity</u> or <u>class 2 activity</u> has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a <u>site contamination declaration form</u>).

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

Desired Outcome
Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.

Page 91 of 133 Printed on 1/02/2022

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
	General
PO 1.1	DTS/DPF 1.1
Development is located and designed to minimise hazard or nuisance to adjacent development and land uses.	None are applicable.
	Visual Amenity
PO 2.1	DTS/DPF 2.1
The visual impact of above-ground infrastructure networks and services (excluding high voltage transmission lines), renewable energy facilities (excluding wind farms), energy storage facilities and ancillary development is minimised from townships, scenic routes and public roads by: (a) utilising features of the natural landscape to obscure views where practicable (b) siting development below ridgelines where practicable (c) avoiding visually sensitive and significant landscapes (d) using materials and finishes with low-reflectivity and colours that complement the surroundings (e) using existing vegetation to screen buildings (f) incorporating landscaping or landscaped mounding around the perimeter of a site and between adjacent allotments accommodating or zoned to primarily accommodate sensitive receivers.	None are applicable.
PO 2.2	DTS/DPF 2.2
Pumping stations, battery storage facilities, maintenance sheds and other ancillary structures incorporate vegetation buffers to reduce adverse visual impacts on adjacent land.	None are applicable.
PO 2.3	DTS/DPF 2.3
Surfaces exposed by earthworks associated with the installation of storage facilities, pipework, penstock, substations and other ancillary plant are reinstated and revegetated to reduce adverse visual impacts on adjacent land.	None are applicable.
	Rehabilitation
PO 3.1	DTS/DPF 3.1
Progressive rehabilitation (incorporating revegetation) of disturbed areas, ahead of or upon decommissioning of areas used for renewable energy facilities and	None are applicable.

Page 92 of 133 Printed on 1/02/2022

transmission corridors.	
	Hazard Management
PO 4.1	DTS/DPF 4.1
Infrastructure and renewable energy facilities and ancillary development located and operated to not adversely impact maritime or air transport safety, including the operation of ports, airfields and landing strips.	None are applicable.
PO 4.2	DTS/DPF 4.2
Facilities for energy generation, power storage and transmission are separated as far as practicable from dwellings, tourist accommodation and frequently visited public places (such as viewing platforms / lookouts) to reduce risks to public safety from fire or equipment malfunction.	None are applicable.
PO 4.3	DTS/DPF 4.3
Bushfire hazard risk is minimised for renewable energy facilities by providing appropriate access tracks, safety equipment and water tanks and establishing cleared areas around substations, battery storage and operations compounds.	None are applicable.
Electricity Infras	structure and Battery Storage Facilities
PO 5.1	DTS/DPF 5.1
Electricity infrastructure is located to minimise visual impacts through techniques including:	None are applicable.
(a) siting utilities and services: (i) on areas already cleared of native vegetation (ii) where there is minimal interference or disturbance to existing native vegetation or biodiversity	
(b) grouping utility buildings and structures with non- residential development, where practicable.	
PO 5.2	DTS/DPF 5.2
Electricity supply (excluding transmission lines) serving new development in urban areas and townships installed underground, excluding lines having a capacity exceeding or equal to 33kV.	None are applicable.
PO 5.3	DTS/DPF 5.3
Battery storage facilities are co-located with substation infrastructure where practicable to minimise the development footprint and reduce environmental impacts.	None are applicable.
Tel	ecommunication Facilities
PO 6.1	DTS/DPF 6.1
The proliferation of telecommunications facilities in the form of towers/monopoles in any one locality is managed,	None are applicable.

Page 93 of 133 Printed on 1/02/2022

other c	technically feasible, by co-locating a facility with ommunications facilities to mitigate impacts from on visual amenity.				
PO 6.2		DTS/DPF 6.2			
practica	mmunications antennae are located as close as able to support structures to manage overall bulk tigate impacts on visual amenity.	None are applicable.			
PO 6.3		DTS/DPF 6.3			
Teleco	mmunications facilities, particularly	None are applicable.			
towers	monopoles, are located and sized to mitigate visual				
impacts	s by the following methods:				
(a)	where technically feasible, incorporating the facility within an existing structure that may serve another purpose				
	or all of the following:				
(b)	using existing buildings and landscape features to obscure or interrupt views of a facility from nearby public roads, residential areas and places of high public amenity to the extent practical				
	without unduly hindering the effective provision of telecommunications services				
(c)	using materials and finishes that complement the environment				
(d)	screening using landscaping and vegetation, particularly for equipment shelters and huts.				
	Re	newable Energy Facilities			
PO 7.1		DTS/DPF 7.1			
practication	rable energy facilities are located as close as able to existing transmission infrastructure to e connections and minimise environmental impacts sult of extending transmission infrastructure.	None are applicable.			
	Renewab	I le Energy Facilities (Wind Farm)			
PO 8.1		DTS/DPF 8.1			
Visual	impact of wind turbine generators on the amenity of	Wind turbine generators are:			
residential and tourist development is reduced through appropriate separation.		(a) set back at least 2000m from the base of a turbine to any of the following zones: (i) Rural Settlement Zone (ii) Township Zone			
		(iii) Rural Living Zone			
		(iv) Rural Neighbourhood Zone			
		with an additional 10m setback per additional metre over 150m overall turbine height (measured from the base of the turbine). (b) set back at least 1500m from the base of the turbine to non-associated (non-stakeholder) dwellings and tourist accommodation			
PO 8.2		DTS/DPF 8.2			
. 0 0.2					

Page 94 of 133 Printed on 1/02/2022

The visual impact of wind turbine generators on natur landscapes is managed by:	None are applicable.
 (a) designing wind turbine generators to be uniffing in colour, size and shape (b) coordinating blade rotation and direction (c) mounting wind turbine generators on tubular towers as opposed to lattice towers. 	rm
PO 8.3	DTS/DPF 8.3
Wind turbine generators and ancillary development minimise potential for bird and bat strike.	None are applicable.
PO 8.4	DTS/DPF 8.4
Wind turbine generators incorporate recognition system or physical markers to minimise the risk to aircraft operations.	No Commonwealth air safety (CASA / ASA) or Defence requirement is applicable.
PO 8.5	DTS/DPF 8.5
Meteorological masts and guidewires are identifiable aircraft through the use of colour bands, marker balls high visibility sleeves or flashing strobes.	• • • • • • • • • • • • • • • • • • • •
Rei	ewable Energy Facilities (Solar Power)
PO 9.1	DTS/DPF 9.1
Ground mounted solar power facilities generating 5M more are not located on land requiring the clearance areas of intact native vegetation or on land of high environmental, scenic or cultural value.	
PO 9.2	DTS/DPF 9.2
Ground mounted solar power facilities allow for mover of wildlife by:	nent None are applicable.
 (a) incorporating wildlife corridors and habitat refuges (b) avoiding the use of extensive security or perimeter fencing or incorporating fencing the enables the passage of small animals without unreasonably compromising the security of the facility. 	
PO 9.3	DTS/DPF 9.3
Amenity impacts of solar power facilities are minimise through separation from conservation areas and sens receivers in other ownership.	
	Generation Capacity Approximate size of array Approximate size of array Approximate size of array Approximate size of array Approximate from from conservation areas Betback from conservation areas Settlement, Rural Neighbourhood and Rural Living Zones ¹

Page 95 of 133 Printed on 1/02/2022

	11	1	i i		
	50MW>	80ha+	30m	500m	2km
	10MW<50MW	16ha-<80ha	25m	500m	1.5km
	5MW<10MW	8ha to <16ha	20m	500m	1km
	1MW<5MW	1.6ha to <8ha	15m	500m	500m
	100kW<1MW	0.5ha<1.6ha	10m	500m	100m
	<100kW	<0.5ha	5m	500m	25m
	Notes:				
	Does not app facility is located	-		-	ounted solar power
PO 9.4	DTS/DPF 9.4				
Ground mounted solar power facilities incorporate landscaping within setbacks from adjacent road frontages and boundaries of adjacent allotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.	None are applicable.				
Hydropowe	er / Pumped Hydropo	ower Facilities			
PO 10.1	DTS/DPF 10.1				
Hydropower / pumped hydropower facility storage is designed and operated to minimise the risk of storage dam failure.	None are applicable.				
PO 10.2	DTS/DPF 10.2				
Hydropower / pumped hydropower facility storage is designed and operated to minimise water loss through increased evaporation or system leakage, with the incorporation of appropriate liners, dam covers, operational measures or detection systems.	None are applica	able.			
PO 10.3	DTS/DPF 10.3				
Hydropower / pumped hydropower facilities on existing or former mine sites minimise environmental impacts from site contamination, including from mine operations or water sources subject to such processes, now or in the future.	None are applica	able.			
	Water Supply				
PO 11.1	DTS/DPF 11.1				
Development is connected to an appropriate water supply to meet the ongoing requirements of the intended use.	Development is scheme or main requirements of	s water supply	with the cap		

Page 96 of 133 Printed on 1/02/2022

PO 11.2

Dwellings are connected to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the intended use. Where this is not available an appropriate rainwater tank or storage system for domestic use is provided.

DTS/DPF 11.2

A dwelling is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the development. Where this is not available it is serviced by a rainwater tank or tanks capable of holding at least 50,000 litres of water which is:

- (a) exclusively for domestic use
- (b) connected to the roof drainage system of the dwelling.

Wastewater Services

PO 12.1

Development is connected to an approved common wastewater disposal service with the capacity to meet the requirements of the intended use. Where this is not available an appropriate on-site service is provided to meet the ongoing requirements of the intended use in accordance with the following:

- it is wholly located and contained within the allotment of the development it will service
- (b) in areas where there is a high risk of contamination of surface, ground, or marine water resources from on-site disposal of liquid wastes, disposal systems are included to minimise the risk of pollution to those water resources
- (c) septic tank effluent drainage fields and other wastewater disposal areas are located away from watercourses and flood prone, sloping, saline or poorly drained land to minimise environmental harm.

DTS/DPF 12.1

Development is connected, or will be connected, to an approved common wastewater disposal service with the capacity to meet the requirements of the development. Where this is not available it is instead capable of being serviced by an on-site waste water treatment system in accordance with the following:

- (a) the system is wholly located and contained within the allotment of development it will service; and
- (b) the system will comply with the requirements of the South Australian Public Health Act 2011.

PO 12.2

Effluent drainage fields and other wastewater disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.

DTS/DPF 12.2

Development is not built on, or encroaches within, an area that is, or will be, required for a sewerage system or waste control system.

Temporary Facilities

PO 13.1

In rural and remote locations, development that is likely to generate significant waste material during construction, including packaging waste, makes provision for a temporary on-site waste storage enclosure to minimise the incidence of wind-blown litter.

DTS/DPF 13.1

A waste collection and disposal service is used to dispose of the volume of waste at the rate it is generated.

PO 13.2

Temporary facilities to support the establishment of renewable energy facilities (including borrow pits, concrete batching plants, laydown, storage, access roads and worker amenity areas) are sited and operated to minimise environmental impact.

DTS/DPF 13.2

None are applicable.

Intensive Animal Husbandry and Dairies

Page 97 of 133 Printed on 1/02/2022

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development of intensive animal husbandry and dairies in locations that are protected from encroachment by sensitive receivers and in a manner that minimises their adverse effects on amenity and the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting ar	nd Design
PO 1.1	DTS/DPF 1.1
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to not unreasonably impact on the environment or amenity of the locality.	None are applicable.
PO 1.2	DTS/DPF 1.2
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to prevent the potential transmission of disease to other operations where animals are kept.	None are applicable.
PO 1.3	DTS/DPF 1.3
Intensive animal husbandry and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	None are applicable.
PO 1.4	DTS/DPF 1.4
Dairies and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	Dairies, associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities are located 500m or more from the nearest sensitive receiver in other ownership.
PO 1.5	DTS/DPF 1.5
Lagoons for the storage or treatment of milking shed effluent is adequately separated from roads to minimise impacts from odour on the general public.	Lagoons for the storage or treatment of milking shed effluent are set back 20m or more from public roads.
W	aste
PO 2.1	DTS/DPF 2.1
Storage of manure, used litter and other wastes (other than waste	None are applicable.

Page 98 of 133 Printed on 1/02/2022

Policy24	I - Enquiry	
water l	agoons) is sited, designed, constructed and managed to:	
(a) (b) (c)	avoid attracting and harbouring vermin avoid polluting water resources be located outside 1% AEP flood event areas.	
	Soil and Wat	er Protection
PO 3.1		DTS/DPF 3.1
resour	id environmental harm and adverse effects on water ces, intensive animal husbandry operations are appropriately ck from: public water supply reservoirs major watercourses (third order or higher stream) any other watercourse, bore or well used for domestic or stock water supplies.	(a) 800m or more from a public water supply reservoir (b) 200m or more from a major watercourse (third order or higher stream) (c) 100m or more from any other watercourse, bore or well used for domestic or stock water supplies.
PO 3.2		DTS/DPF 3.2
	ve animal husbandry operations and dairies incorporate oriately designed effluent and run-off facilities that:	None are applicable.
(a) (b)	have sufficient capacity to hold effluent and runoff from the operations on site ensure effluent does not infiltrate and pollute groundwater, soil or other water resources.	

Interface between Land Uses

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development is located and designed to mitigate adverse effects on or from neighbouring and proximate land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
General Land Use Compatibility		
PO 1.1	DTS/DPF 1.1	
Sensitive receivers are designed and sited to protect residents and occupants from adverse impacts generated by lawfully existing land uses (or lawfully approved land uses) and land uses desired in the zone.	None are applicable.	

Page 99 of 133 Printed on 1/02/2022

PO 1.2

Development adjacent to a site containing a sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers is designed to minimise adverse impacts.

DTS/DPF 1.2

None are applicable.

Hours of Operation

PO 2.1

Non-residential development does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) or an adjacent zone primarily for sensitive receivers through its hours of operation having regard to:

- (a) the nature of the development
- (b) measures to mitigate off-site impacts
- (c) the extent to which the development is desired in the zone
- (d) measures that might be taken in an adjacent zone primarily for sensitive receivers that mitigate adverse impacts without unreasonably compromising the intended use of that land.

DTS/DPF 2.1

Development operating within the following hours:

Ol	Harris of an and an
Class of Development	Hours of operation
Consulting room	7am to 9pm, Monday to Friday
	8am to 5pm, Saturday
Office	7am to 9pm, Monday to Friday
	8am to 5pm, Saturday
Shop, other than any	7am to 9pm, Monday to Friday
one or combination of the following:	8am to 5pm, Saturday and Sunday
(a) restaurant	
(b) cellar door in the Productive Rural	
Landscape	
Zone, Rural Zone or Rural	
Horticulture Zone	

Overshadowing

PO 3.1

Overshadowing of habitable room windows of adjacent residential land uses in:

- a. a neighbourhood-type zone is minimised to maintain access to direct winter sunlight
- b. other zones is managed to enable access to direct winter sunlight.

DTS/DPF 3.1

North-facing windows of habitable rooms of adjacent residential land uses in a neighbourhood-type zone receive at least 3 hours of direct sunlight between 9.00am and 3.00pm on 21 June.

PO 3.2

Overshadowing of the primary area of private open space or communal open space of adjacent residential land uses in:

- a. a neighbourhood type zone is minimised to maintain access to direct winter sunlight
- b. other zones is managed to enable access to direct winter sunlight.

DTS/DPF 3.2

Development maintains 2 hours of direct sunlight between 9.00 am and 3.00 pm on 21 June to adjacent residential land uses in a neighbourhood-type zone in accordance with the following:

- a. for ground level private open space, the smaller of the following:
- i. half the existing ground level open space or
- ii. 35m2 of the existing ground level open space (with at least one of the area's dimensions measuring 2.5m)

Page 100 of 133 Printed on 1/02/2022

Olloy24	- Enquiry	b. for ground level communal open space, at least half of the
		existing ground level open space.
PO 3.3		DTS/DPF 3.3
	pment does not unduly reduce the generating capacity of nt rooftop solar energy facilities taking into account:	None are applicable.
(a) (b) (c)	the form of development contemplated in the zone the orientation of the solar energy facilities the extent to which the solar energy facilities are already overshadowed.	
PO 3.4		DTS/DPF 3.4
wind fa	pment that incorporates moving parts, including windmills and rms, are located and operated to not cause unreasonable ce to nearby dwellings and tourist accommodation caused by a flicker.	None are applicable.
	Activities Generatin	g Noise or Vibration
PO 4.1		DTS/DPF 4.1
unreas	pment that emits noise (other than music) does not onably impact the amenity of sensitive receivers (or lawfully ed sensitive receivers).	Noise that affects sensitive receivers achieves the relevant Environment Protection (Noise) Policy criteria.
PO 4.2		DTS/DPF 4.2
plant ar designe adjacer receive	for the on-site manoeuvring of service and delivery vehicles, and equipment, outdoor work spaces (and the like) are sed and sited to not unreasonably impact the amenity of ant sensitive receivers (or lawfully approved sensitive are) and zones primarily intended to accommodate sensitive are due to noise and vibration by adopting techniques arg:	None are applicable.
(a)	locating openings of buildings and associated services away from the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers	
(b)	when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers	
(c)	housing plant and equipment within an enclosed structure or acoustic enclosure	
(d)	providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone.	
PO 4.3		DTS/DPF 4.3
system to not c	plant and equipment in the form of pumps and/or filtration is for a swimming pool or spa are positioned and/or housed cause unreasonable noise nuisance to adjacent sensitive irs (or lawfully approved sensitive receivers).	The pump and/or filtration system ancillary to a dwelling erected on the same site is: (a) enclosed in a solid acoustic structure located at least 5m from the nearest habitable room located on an adjoining allotment or

Page 101 of 133 Printed on 1/02/2022

Policy24 - Enquiry	(b) located at least 12m from the nearest habitable room located on an adjoining allotment.
PO 4.4	DTS/DPF 4.4
External noise into bedrooms is minimised by separating or shielding these rooms from service equipment areas and fixed noise sources located on the same or an adjoining allotment.	Adjacent land is used for residential purposes.
PO 4.5	DTS/DPF 4.5
Outdoor areas associated with licensed premises (such as beer gardens or dining areas) are designed and/or sited to not cause unreasonable noise impact on existing adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.
PO 4.6	DTS/DPF 4.6
Development incorporating music achieves suitable acoustic amenity when measured at the boundary of an adjacent sensitive receiver (or lawfully approved sensitive receiver) or zone primarily	Development incorporating music includes noise attenuation measures that will achieve the following noise levels:
intended to accommodate sensitive receivers.	Assessment location Music noise level
	Externally at the nearest existing or envisaged noise sensitive location Less than 8dB above the level of background noise (L _{90,15min}) in any octave band of the sound spectrum (LOCT10,15 < LOCT90,15 + 8dB)
Air C	Quality
PO 5.1	DTS/DPF 5.1
Development with the potential to emit harmful or nuisance- generating air pollution incorporates air pollution control measures to prevent harm to human health or unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) within the locality and zones primarily intended to accommodate sensitive receivers.	None are applicable.
PO 5.2	DTS/DPF 5.2
Development that includes chimneys or exhaust flues (including cafes, restaurants and fast food outlets) is designed to minimise nuisance or adverse health impacts to sensitive receivers (or lawfully approved sensitive receivers) by:	None are applicable.
 incorporating appropriate treatment technology before exhaust emissions are released 	
(b) locating and designing chimneys or exhaust flues to maximise the dispersion of exhaust emissions, taking into account the location of sensitive receivers.	
Ligh	ut Spill
PO 6.1	DTS/DPF 6.1
External lighting is positioned and designed to not cause unreasonable light spill impact on adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.

Page 102 of 133 Printed on 1/02/2022

Policy24 - Enquiry		
External lighting is not hazardous to motorists and cyclists.	None are applicable.	
Solar Reflectivity / Glare		
PO 7.1	DTS/DPF 7.1	
Development is designed and comprised of materials and finishes that do not unreasonably cause a distraction to adjacent road users and pedestrian areas or unreasonably cause heat loading and micro-climatic impacts on adjacent buildings and land uses as a result of reflective solar glare.	None are applicable.	
Electrical I	nterference	
PO 8.1	DTS/DPF 8.1	
Development in rural and remote areas does not unreasonably diminish or result in the loss of existing communication services due to electrical interference.	The building or structure: (a) is no greater than 10m in height, measured from existing ground level or (b) is not within a line of sight between a fixed transmitter and fixed receiver (antenna) other than where an alternative service is available via a different fixed transmitter or cable.	
Interface with	Rural Activities	
PO 9.1	DTS/DPF 9.1	
Sensitive receivers are located and designed to mitigate impacts from lawfully existing horticultural and farming activities (or lawfully approved horticultural and farming activities), including spray drift and noise and do not prejudice the continued operation of these activities.	None are applicable.	
PO 9.2	DTS/DPF 9.2	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing intensive animal husbandry activities and do not prejudice the continued operation of these activities.	None are applicable.	
PO 9.3	DTS/DPF 9.3	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing land-based aquaculture activities and do not prejudice the continued operation of these activities.	Sensitive receivers are located at least 200m from the boundary of a site used for land-based aquaculture and associated components in other ownership.	
PO 9.4	DTS/DPF 9.4	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing dairies including associated wastewater lagoons and liquid/solid waste storage and disposal facilities and do not prejudice the continued operation of these activities.	Sensitive receivers are sited at least 500m from the boundary of a site used for a dairy and associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities in other ownership.	
PO 9.5	DTS/DPF 9.5	
Sensitive receivers are located and designed to mitigate the potential impacts from lawfully existing facilities used for the handling, transportation and storage of bulk commodities (recognising the potential for extended hours of operation) and do not prejudice the continued operation of these activities.	Sensitive receivers are located away from the boundary of a site used for the handling, transportation and/or storage of bulk commodities in other ownership in accordance with the following: (a) 300m or more, where it involves the handling of agricultura crop products, rock, ores, minerals, petroleum products or	

Page 103 of 133 Printed on 1/02/2022

chemicals to or from any commercial storage facility (b) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including seaport grain terminals) where the handling of these materials into or from vessels does not exceed 100 tonnes per day (c) 500m or more, where it involves the storage of bulk petroleum in individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1000 cubic metres (d) 500m or more, where it involves the handling of coal with a capacity up to 1 tonne per day or a storage capacity up to 50 tonnes (e) 1000m or more, where it involves the handling of coal with a capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes.	
DTS/DPF 9.6	
None are applicable.	
DTS/DPF 9.7	
None are applicable.	
rries (Rural and Remote Areas)	
DTS/DPF 10.1	
Sensitive receivers are located no closer than 500m from the boundary of a Mining Production Tenement under the <i>Mining Act</i> 1971.	

Land Division

Assessment Provisions (AP)

Desired Outcome			
DO 1	Land division:		
	(a) (b)	creates allotments with the appropriate dimensions and shape for their intended use allows efficient provision of new infrastructure and the optimum use of underutilised infrastructure	
	(c)	integrates and allocates adequate and suitable land for the preservation of site features of value, including significant vegetation, watercourses, water bodies and other environmental features	
	(d)	facilitates solar access through allotment orientation	
	(e)	creates a compact urban form that supports active travel, walkability and the use of public transport	
	(f)	avoids areas of high natural hazard risk.	

Page 104 of 133 Printed on 1/02/2022

Performance Outcome

Deemed-to-Satisfy Criteria / Designated Performance Feature

All land division

PO 1.1 Land division creates allotments suitable for their intended use: Comparison of land satisfies (a) or (b): Comparison of land satisfies (a) or (land) approved in an operation of land satisfies (a) or (land) approved in an operation of land satisfies (a) or (land) approved in an operation of land. Interface land satisfies (a) or (land) approved in an operation of land. Interface land satisfies (a) or (land) approved in an operation of land. Interface land services. Comparison of land satisfies (a) or (land) approved in an operation of land. Interface land services.	Allotment configuration		
(a) reflects the site boundaries illustrated and approved in an operative or existing development authorisation for residential development under the Development Act 1993 or Planning, Development and infrastructure Act 2016 where the allotments are used or are proposed to be used solely for residential purposes (b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed allotments. PO 12 Land division considers the physical characteristics of the land, preservation of environmental and cultural features of value and the prevailing context of the locality. PO 21 Land division results in a pattern of development that minimises the likelihood of future earthworks and retaining walls. PO 22 Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones. PO 23 DTS/DPF 2.1 None are applicable. PO 24 Land division maximises the number of allotments that face public open space and public streets. PO 24 DTS/DPF 2.3 None are applicable. PO 25 DTS/DPF 2.4 Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. PO 25 DTS/DPF 2.5 DTS/DPF 2.5 None are applicable. PO 26 DTS/DPF 2.5 None are applicable. PO 27 DTS/DPF 2.6 None are applicable. PO 28 DTS/DPF 2.6 None are applicable. PO 29 DTS/DPF 2.6 None are applicable.	PO 1.1	DTS/DPF 1.1	
Land division considers the physical characteristics of the land, preservation of environmental and cultural features of value and the prevailing context of the locality. Design and Layout	Land division creates allotments suitable for their intended use.	 (a) reflects the site boundaries illustrated and approved in an operative or existing development authorisation for residential development under the <i>Development Act 1993</i> or <i>Planning, Development and Infrastructure Act 2016</i> where the allotments are used or are proposed to be used solely for residential purposes (b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed 	
PC 2.1 Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones. PO 2.4 Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones. PO 2.3 Land division maximises the number of allotments that face public open space and public streets. PO 2.4 Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	PO 1.2	DTS/DPF 1.2	
PO 2.1 Land division results in a pattern of development that minimises the likelihood of future earthworks and retaining walls. PO 2.2 Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones. PO 2.3 Land division maximises the number of allotments that face public open space and public streets. PO 2.4 Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	preservation of environmental and cultural features of value and the	None are applicable.	
Land division results in a pattern of development that minimises the likelihood of future earthworks and retaining walls. PO 2.2 Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones. PO 2.3 Land division maximises the number of allotments that face public open space and public streets. PO 2.4 Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	Design al	nd Layout	
likelihood of future earthworks and retaining walls. PO 2.2 Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones. PO 2.3 Land division maximises the number of allotments that face public open space and public streets. PO 2.4 Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	PO 2.1	DTS/DPF 2.1	
Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones. PO 2.3 Land division maximises the number of allotments that face public open space and public streets. PO 2.4 Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding. None are applicable. None are applicable. DTS/DPF 2.5 None are applicable. DTS/DPF 2.6 None are applicable.		None are applicable.	
impacts between potentially conflicting land uses and/or zones. PO 2.3 Land division maximises the number of allotments that face public open space and public streets. PO 2.4 Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding. DTS/DPF 2.5 None are applicable. DTS/DPF 2.6 None are applicable.	PO 2.2	DTS/DPF 2.2	
Land division maximises the number of allotments that face public open space and public streets. PO 2.4 Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. DTS/DPF 2.4 None are applicable. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding. None are applicable. None are applicable. None are applicable.	1	None are applicable.	
open space and public streets. PO 2.4 Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding. DTS/DPF 2.6 None are applicable. DTS/DPF 2.6 None are applicable.	PO 2.3	DTS/DPF 2.3	
Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding. None are applicable. DTS/DPF 2.6 None are applicable.	-	None are applicable.	
existing transport network and available infrastructure. PO 2.5 Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding. DTS/DPF 2.5 None are applicable. DTS/DPF 2.6 None are applicable.	PO 2.4	DTS/DPF 2.4	
Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding. None are applicable. DTS/DPF 2.6 None are applicable.		None are applicable.	
that supports an orderly and economic provision of land, infrastructure and services. PO 2.6 Land division results in watercourses being retained within open space and development taking place on land not subject to flooding. DTS/DPF 2.6 None are applicable.	PO 2.5	DTS/DPF 2.5	
Land division results in watercourses being retained within open space and development taking place on land not subject to flooding. None are applicable.	that supports an orderly and economic provision of land,	None are applicable.	
space and development taking place on land not subject to flooding.	PO 2.6	DTS/DPF 2.6	
PO 2.7 DTS/DPF 2.7		None are applicable.	
	PO 2.7	DTS/DPF 2.7	

Page 105 of 133 Printed on 1/02/2022

Policy24 - Enquiry	
Land division results in legible street patterns connected to the surrounding street network.	None are applicable.
PO 2.8	DTS/DPF 2.8
Land division is designed to preserve existing vegetation of value including native vegetation and regulated and significant trees.	None are applicable.
Roads ar	nd Access
PO 3.1	DTS/DPF 3.1
Land division provides allotments with access to an all-weather public road.	None are applicable.
PO 3.2	DTS/DPF 3.2
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.3	DTS/DPF 3.3
Land division does not impede access to publicly owned open space and/or recreation facilities.	None are applicable.
PO 3.4	DTS/DPF 3.4
Road reserves provide for safe and convenient movement and parking of projected volumes of vehicles and allow for the efficient movement of service and emergency vehicles.	None are applicable.
PO 3.5	DTS/DPF 3.5
Road reserves are designed to accommodate pedestrian and cycling infrastructure, street tree planting, landscaping and street furniture.	None are applicable.
PO 3.6	DTS/DPF 3.6
Road reserves accommodate stormwater drainage and public utilities.	None are applicable.
PO 3.7	DTS/DPF 3.7
Road reserves provide unobstructed vehicular access and egress to and from individual allotments and sites.	None are applicable.
PO 3.8	DTS/DPF 3.8
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.9	DTS/DPF 3.9
Roads, open space and thoroughfares provide safe and convenient linkages to the surrounding open space and transport network.	None are applicable.
PO 3.10	DTS/DPF 3.10
Public streets are designed to enable tree planting to provide shade and enhance the amenity of streetscapes.	None are applicable.
PO 3.11	DTS/DPF 3.11

Page 106 of 133 Printed on 1/02/2022

Local streets are designed to create low-speed environments that	None are applicable.	
are safe for cyclists and pedestrians.		
Infrastructure		
PO 4.1	DTS/DPF 4.1	
Land division incorporates public utility services within road reserves or dedicated easements.	None are applicable.	
PO 4.2	DTS/DPF 4.2	
Waste water, sewage and other effluent is capable of being disposed of from each allotment without risk to public health or the environment.	(a) a waste water treatment plant that has the hydraulic volume and pollutant load treatment and disposal capacity for the maximum predicted wastewater volume generated by subsequent development of the proposed allotment or (b) a form of on-site waste water treatment and disposal that meets relevant public health and environmental standards.	
PO 4.3	DTS/DPF 4.3	
Septic tank effluent drainage fields and other waste water disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is or will be, required for a sewerage system or waste control system.	
PO 4.4	DTS/DPF 4.4	
Constructed wetland systems, including associated detention and retention basins, are sited and designed to ensure public health and safety is protected, including by minimising potential public health risks arising from the breeding of mosquitoes.	None are applicable.	
PO 4.5	DTS/DPF 4.5	
Constructed wetland systems, including associated detention and retention basins, are sited and designed to allow sediments to settle prior to discharge into watercourses or the marine environment.	None are applicable.	
PO 4.6	DTS/DPF 4.6	
Constructed wetland systems, including associated detention and retention basins, are sited and designed to function as a landscape feature.	None are applicable.	
Minor Land Division (Under 20 Allotments)		
Open Space		
PO 5.1	DTS/DPF 5.1	
Land division proposing an additional allotment under 1 hectare provides or supports the provision of open space.	None are applicable.	
Solar Orientation		
PO 6.1	DTS/DPF 6.1	
Land division for residential purposes facilitates solar access through allotment orientation.	None are applicable.	
Water Sensitive Design		
	T T	

Page 107 of 133 Printed on 1/02/2022

Policy24 - Eriquily		
PO 7.1	DTS/DPF 7.1	
Land division creating a new road or common driveway includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.	
PO 7.2	DTS/DPF 7.2	
Land division designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
Battle-Axe Development		
PO 8.1	DTS/DPF 8.1	
Battle-axe development appropriately responds to the existing neighbourhood context.	Allotments are not in the form of a battle-axe arrangement.	
PO 8.2	DTS/DPF 8.2	
Battle-axe development designed to allow safe and convenient movement.	The handle of a battle-axe development:	
	(a) has a minimum width of 4m or (b) where more than 3 allotments are proposed, a minimum width of 5.5m.	
PO 8.3	DTS/DPF 8.3	
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre.	
PO 8.4	DTS/DPF 8.4	
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management.	Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or	
	porous material	
	(b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).	
Major Land Division (20+ Allotments)		
Open Space		
PO 9.1	DTS/DPF 9.1	
Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration.	None are applicable.	
PO 9.2	DTS/DPF 9.2	
Land allocated for open space is suitable for its intended active and passive recreational use considering gradient and potential for inundation.	None are applicable.	
PO 9.3	DTS/DPF 9.3	
Land allocated for active recreation has dimensions capable of	None are applicable.	

Page 108 of 133 Printed on 1/02/2022

Folicy24 - Eliquily		
accommodating a range of active recreational activities.		
Water Sens	itive Design	
PO 10.1	DTS/DPF 10.1	
Land division creating 20 or more residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
PO 10.2	DTS/DPF 10.2	
Land division creating 20 or more non-residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
PO 10.3	DTS/DPF 10.3	
Land division creating 20 or more allotments includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.	
Solar Orientation		
PO 11.1	DTS/DPF 11.1	
Land division creating 20 or more allotments for residential purposes facilitates solar access through allotment orientation and allotment dimensions.	None are applicable.	

Marinas and On-Water Structures

Assessment Provisions (AP)

Desired Outcome	
DO 1	Marinas and on-water structures are located and designed to minimise the impairment of commercial, recreational and navigational activities and adverse impacts on the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Navigation and Safety	

Page 109 of 133 Printed on 1/02/2022

olicy24 - Enquiry		
DTS/DPF 1.1		
None are applicable.		
DTS/DPF 1.2		
None are applicable.		
DTS/DPF 1.3		
None are applicable.		
DTS/DPF 1.4		
Marinas and on-water structures are set back 250m or more from commercial shipping lanes.		
DTS/DPF 1.5		
On-water structures are set back: (a) 3km or more from upstream water supply pumping station take-off points (b) 500m or more from downstream water supply pumping station take-off points.		
DTS/DPF 1.6		
None are applicable.		
Environmental Protection		
DTS/DPF 2.1		
None are applicable.		

Open Space and Recreation

Assessment Provisions (AP)

Desired Outcome	
DO 1	Pleasant, functional and accessible open space and recreation facilities are provided at State, regional, district, neighbourhood and local levels for active and passive recreation, biodiversity, community health, urban cooling, tree canopy cover, visual amenity, gathering spaces, wildlife and waterway corridors, and a range of other functions and at a range of sizes that reflect the purpose of that open space.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 110 of 133 Printed on 1/02/2022

Performance Outcome	Deemed-to-Satisfy Criteria /	
	Designated Performance	
	Feature	
Land Use and Intensity		
PO 1.1	DTS/DPF 1.1	
Recreation facilities are compatible with surrounding land uses and activities.	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Open space areas include natural or landscaped areas using locally indigenous plant species and large trees.	None are applicable.	
Design a	and Siting	
PO 2.1	DTS/DPF 2.1	
Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Open space and recreation facilities incorporate park furniture, shaded areas and resting places.	None are applicable.	
PO 2.3	DTS/DPF 2.3	
Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities.	None are applicable.	
Pedestrians	and Cyclists	
PO 3.1	DTS/DPF 3.1	
Open space incorporates:	None are applicable.	
 (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the 		
road network; (c) easily identified access points.		
Usa	bility	
PO 4.1	DTS/DPF 4.1	
Land allocated for open space is suitable for its intended active and passive recreational use taking into consideration its gradient and potential for inundation.	None are applicable.	
Safety and Security		
PO 5.1	DTS/DPF 5.1	
Open space is overlooked by housing, commercial or other development to provide casual surveillance where possible.	None are applicable.	
PO 5.2	DTS/DPF 5.2	
Play equipment is located to maximise opportunities for passive surveillance.	None are applicable.	

Page 111 of 133 Printed on 1/02/2022

DTS/DPF 5.3
None are applicable.
DTS/DPF 5.4
None are applicable.
DTS/DPF 5.5
None are applicable.
DTS/DPF 5.6
None are applicable.
nage
DTS/DPF 6.1
None are applicable.
nd Structures
DTS/DPF 7.1
None are applicable.
DTS/DPF 7.2
None are applicable.
DTS/DPF 7.3
None are applicable.
DTS/DPF 7.4
None are applicable.
scaping
DTS/DPF 8.1
None are applicable.
DTS/DPF 8.2
None are applicable.

Page 112 of 133 Printed on 1/02/2022

(a) along cyclist and pedestrian routes;(b) around picnic and barbecue areas;(c) in car parking areas.	
PO 8.3 Landscaping in open space facilitates habitat for local fauna and facilitates biodiversity.	DTS/DPF 8.3 None are applicable.
PO 8.4 Landscaping including trees and other vegetation passively watered with local rainfall run-off, where practicable.	DTS/DPF 8.4 None are applicable.

Out of Activity Centre Development

Assessment Provisions (AP)

	Desired Outcome	
DO1	1	The role of Activity Centres in contributing to the form and pattern of development and enabling equitable and convenient
	access to a range of shopping, administrative, cultural, entertainment and other facilities in a single trip is maintained and	
		reinforced.

	Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1		DTS/DPF 1.1
	sidential development outside Activity Centres of a scale and at does not diminish the role of Activity Centres:	None are applicable.
(a)	as primary locations for shopping, administrative, cultural, entertainment and community services	
(b)	as a focus for regular social and business gatherings	
(c)	in contributing to or maintaining a pattern of development that supports equitable community access to services and facilities.	
PO 1.2		DTS/DPF 1.2
Out-of-a	activity centre non-residential development complements	None are applicable.
Activity Centres through the provision of services and facilities:		
(a)	that support the needs of local residents and workers, particularly in underserviced locations	
(b)	at the edge of Activities Centres where they cannot readily be accommodated within an existing Activity Centre to expand the range of services on offer and support the role of the Activity Centre.	

Resource Extraction

Page 113 of 133 Printed on 1/02/2022

Assessment Provisions (AP)

Desired Outcome	
DO 1	Resource extraction activities are developed in a manner that minimises human and environmental impacts.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use a	and Intensity
PO 1.1	DTS/DPF 1.1
Resource extraction activities minimise landscape damage outside of those areas unavoidably disturbed to access and exploit a resource and provide for the progressive reclamation and betterment of disturbed areas.	None are applicable.
PO 1.2	DTS/DPF 1.2
Resource extraction activities avoid damage to cultural sites or artefacts.	None are applicable.
Water	Quality
PO 2.1	DTS/DPF 2.1
Stormwater and/or wastewater from resource extraction activities is diverted into appropriately sized treatment and retention systems to enable reuse on site.	None are applicable.
Separation Treatments,	Buffers and Landscaping
PO 3.1	DTS/DPF 3.1
Resource extraction activities minimise adverse impacts upon sensitive receivers through incorporation of separation distances and/or mounding/vegetation.	None are applicable.
PO 3.2	DTS/DPF 3.2
Resource extraction activities are screened from view from adjacent land by perimeter landscaping and/or mounding.	None are applicable.

Site Contamination

Assessment Provisions (AP)

Page 114 of 133 Printed on 1/02/2022

Desired Outcome

DO 1 Ensure land is suitable for the proposed use in circumstances where it is, or may have been, subject to site contamination.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Ensure land is suitable for use when land use changes to a more sensitive use.	Development satisfies (a), (b), (c) or (d): (a) does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a change to a more sensitive use (c) involves a change in the use of land to a more sensitive use on land at which site contamination is unlikely to exist (as demonstrated in a site contamination exists, or may exist (as demonstrated in a site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: (i) a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that- A. site contamination does not exist (or no longer exists) at the land or B. the land is suitable for the proposed use or range of uses (without the need for any further remediation) or C. where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development) and (ii) no other class 1 activity or class 2 activity has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).

Tourism Development

Assessment Provisions (AP)

Desired Outcome

Page 115 of 133 Printed on 1/02/2022

DO 1

Tourism development is built in locations that cater to the needs of visitors and positively contributes to South Australia's visitor economy.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Ger	neral
PO 1.1	DTS/DPF 1.1
Tourism development complements and contributes to local, natural, cultural or historical context where:	None are applicable.
 (a) it supports immersive natural experiences (b) it showcases South Australia's landscapes and produce (c) its events and functions are connected to local food, wine and nature. 	
PO 1.2	DTS/DPF 1.2
Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact.	None are applicable.
Caravan and	Tourist Parks
PO 2.1	DTS/DPF 2.1
Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures.	None are applicable.
PO 2.2	DTS/DPF 2.2
Occupants are provided privacy and amenity through landscaping and fencing.	None are applicable.
PO 2.3	DTS/DPF 2.3
Communal open space and centrally located recreation facilities are provided for guests and visitors.	12.5% or more of a caravan park comprises clearly defined communal open space, landscaped areas and areas for recreation.
PO 2.4	DTS/DPF 2.4
Perimeter landscaping is used to enhance the amenity of the locality.	None are applicable.
PO 2.5	DTS/DPF 2.5
Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development.	None are applicable.
PO 2.6	DTS/DPF 2.6
Long-term occupation does not displace tourist accommodation, particularly in important tourist destinations such as coastal and	None are applicable.

Page 116 of 133 Printed on 1/02/2022

riverine locations.		
Tourist accommodation in areas constituted under the National Parks and Wildlife Act 1972		
PO 3.1	DTS/DPF 3.1	
Tourist accommodation avoids delicate or environmentally sensitive areas such as sand dunes, cliff tops, estuaries, wetlands or substantially intact strata of native vegetation (including regenerated areas of native vegetation lost through bushfire).	None are applicable.	
PO 3.2	DTS/DPF 3.2	
Tourist accommodation is sited and designed in a manner that is subservient to the natural environment and where adverse impacts on natural features, landscapes, habitats and cultural assets are avoided.	None are applicable.	
PO 3.3	DTS/DPF 3.3	
Tourist accommodation and recreational facilities, including associated access ways and ancillary structures, are located on cleared (other than where cleared as a result of bushfire) or degraded areas or where environmental improvements can be achieved.	None are applicable.	
PO 3.4	DTS/DPF 3.4	
Tourist accommodation is designed to prevent conversion to private dwellings through:	None are applicable.	
 (a) comprising a minimum of 10 accommodation units (b) clustering separated individual accommodation units (c) being of a size unsuitable for a private dwelling (d) ensuring functional areas that are generally associated with a private dwelling such as kitchens and laundries are excluded from, or physically separated from individual accommodation units, or are of a size unsuitable for a private dwelling. 		

Transport, Access and Parking

Assessment Provisions (AP)

Desired Outcome	
DO 1	A comprehensive, integrated and connected transport system that is safe, sustainable, efficient, convenient and accessible to all users.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 117 of 133 Printed on 1/02/2022

	Designated Performance
	Feature
Movemen	nt Systems
PO 1.1	DTS/DPF 1.1
Development is integrated with the existing transport system and designed to minimise its potential impact on the functional performance of the transport system.	None are applicable.
PO 1.2	DTS/DPF 1.2
Development is designed to discourage commercial and industrial vehicle movements through residential streets and adjacent other sensitive receivers.	None are applicable.
PO 1.3	DTS/DPF 1.3
Industrial, commercial and service vehicle movements, loading areas and designated parking spaces are separated from passenger vehicle car parking areas to ensure efficient and safe movement and minimise potential conflict.	None are applicable.
PO 1.4 DTS/DPF 1.4	
Development is sited and designed so that loading, unloading and turning of all traffic avoids interrupting the operation of and queuing on public roads and pedestrian paths.	All vehicle manoeuvring occurs onsite.
Sigh	ttlines
PO 2.1	DTS/DPF 2.1
Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians.	None are applicable.
PO 2.2 DTS/DPF 2.2	
Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians.	None are applicable.
Vehicle Access	
PO 3.1	DTS/DPF 3.1
Safe and convenient access minimises impact or interruption on the operation of public roads.	(a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing.
PO 3.2	DTS/DPF 3.2
Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a	None are applicable.

Page 118 of 133 Printed on 1/02/2022

hazard to pedestrians and other vehicular traffic.		
PO 3.3	DTS/DPF 3.3	
Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use.	None are applicable.	
PO 3.4	DTS/DPF 3.4	
Access points are sited and designed to minimise any adverse impacts on neighbouring properties.	None are applicable.	
Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets.	DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	
PO 3.6 Driveways and access points are separated and minimised in	DTS/DPF 3.6 Driveways and access points:	
number to optimise the provision of on-street visitor parking (where on-street parking is appropriate).	 (a) for sites with a frontage to a public road of 20m or less, one access point no greater than 3.5m in width is provided (b) for sites with a frontage to a public road greater than 20m (i) a single access point no greater than 6m in width is provided or (ii) not more than two access points with a width of 3.5m each are provided. 	
PO 3.7	DTS/DPF 3.7	
Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.	Development does not involve a new or modified access or cause an increase in traffic through an existing access that is located within the following distance from a railway crossing: (a) 80 km/h road - 110m (b) 70 km/h road - 90m (c) 60 km/h road - 70m (d) 50km/h or less road - 50m.	
PO 3.8	DTS/DPF 3.8	
Driveways, access points, access tracks and parking areas are designed and constructed to allow adequate movement and	None are applicable.	

Page 119 of 133 Printed on 1/02/2022

manoeuvrability having regard to the types of vehicles that are reasonably anticipated.		
PO 3.9	DTS/DPF 3.9	
Development is designed to ensure vehicle circulation between activity areas occurs within the site without the need to use public roads.	None are applicable.	
Access for People	e with Disabilities	
PO 4.1	DTS/DPF 4.1	
Development is sited and designed to provide safe, dignified and convenient access for people with a disability.	None are applicable.	
Vehicle Pa	rking Rates	
PO 5.1	DTS/DPF 5.1	
Sufficient on-site vehicle parking and specifically marked accessible car parking places are provided to meet the needs of the development or land use having regard to factors that may support a reduced on-site rate such as: (a) availability of on-street car parking (b) shared use of other parking areas (c) in relation to a mixed-use development, where the hours of operation of commercial activities complement the residential use of the site, the provision of vehicle parking may be shared (d) the adaptive reuse of a State or Local Heritage Place.	Development provides a number of car parking spaces on-site at a rate no less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.	
Vehicle Pa	rking Areas	
PO 6.1	DTS/DPF 6.1	
Vehicle parking areas are sited and designed to minimise impact on the operation of public roads by avoiding the use of public roads when moving from one part of a parking area to another.	Movement between vehicle parking areas within the site can occur without the need to use a public road.	
PO 6.2	DTS/DPF 6.2	
Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced, and the like.	None are applicable.	
PO 6.3	DTS/DPF 6.3	
Vehicle parking areas are designed to provide opportunity for integration and shared-use of adjacent car parking areas to reduce the total extent of vehicle parking areas and access points.	None are applicable.	
PO 6.4	DTS/DPF 6.4	
Pedestrian linkages between parking areas and the development are provided and are safe and convenient.	None are applicable.	
PO 6.5	DTS/DPF 6.5	
Vehicle parking areas that are likely to be used during non-daylight hours are provided with sufficient lighting to entry and exit points to ensure clear visibility to users.	None are applicable.	

Page 120 of 133 Printed on 1/02/2022

PO 6.6	DTS/DPF 6.6
Loading areas and designated parking spaces for service vehicles are provided within the boundary of the site.	Loading areas and designated parking spaces are wholly located within the site.
PO 6.7	DTS/DPF 6.7
On-site visitor parking spaces are sited and designed to be accessible to all visitors at all times.	None are applicable.
Undercroft and Below Ground G	Garaging and Parking of Vehicles
PO 7.1	DTS/DPF 7.1
Undercroft and below ground garaging of vehicles is designed to enable safe entry and exit from the site without compromising pedestrian or cyclist safety or causing conflict with other vehicles.	None are applicable.
Internal Roads and Parking Areas in Resid	ential Parks and Caravan and Tourist Parks
PO 8.1	DTS/DPF 8.1
Internal road and vehicle parking areas are surfaced to prevent dust becoming a nuisance to park residents and occupants.	None are applicable.
PO 8.2	DTS/DPF 8.2
Traffic circulation and movement within the park is pedestrian friendly and promotes low speed vehicle movement.	None are applicable.
Bicycle Parking in	Designated Areas
PO 9.1	DTS/DPF 9.1
The provision of adequately sized on-site bicycle parking facilities encourages cycling as an active transport mode.	Areas and / or fixtures are provided for the parking and storage of bicycles at a rate not less than the amount calculated using Transport, Access and Parking Table 3 - Off Street Bicycle Parking Requirements.
PO 9.2	DTS/DPF 9.2
Bicycle parking facilities provide for the secure storage and tethering of bicycles in a place where casual surveillance is possible, is well lit and signed for the safety and convenience of cyclists and deters property theft.	None are applicable.
PO 9.3	DTS/DPF 9.3
Non-residential development incorporates end-of-journey facilities for employees such as showers, changing facilities and secure lockers, and signage indicating the location of the facilities to encourage cycling as a mode of journey-to-work transport.	None are applicable.
Corner	Cut-Offs
PO 10.1	DTS/DPF 10.1
Development is located and designed to ensure drivers can safely turn into and out of public road junctions.	Development does not involve building work, or building work is located wholly outside the land shown as Corner Cut-Off Area in the following diagram:

Page 121 of 133 Printed on 1/02/2022

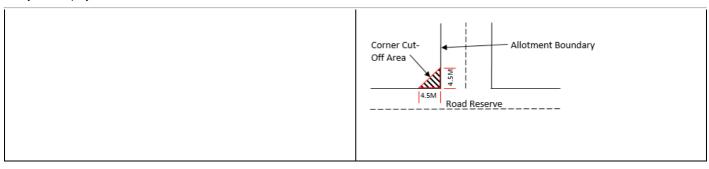


Table 1 - General Off-Street Car Parking Requirements

The following parking rates apply and if located in an area where a lawfully established carparking fund operates, the number of spaces is reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate (unless varied by Table 2 onwards)
	Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.
Residential Development	
Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Group Dwelling	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Residential Flat Building	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Row Dwelling where vehicle access is from the primary street	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Row Dwelling where vehicle access is not from the primary street (i.e. rear-loaded)	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
mo primary succe (no. real-loaded)	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Semi-Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a

Page 122 of 133 Printed on 1/02/2022

	bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Aged / Supported Accommodation	
Retirement village	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Supported accommodation	0.3 spaces per bed.
Residential Development (Other)	
Ancillary accommodation	No additional requirements beyond those associated with the main dwelling.
Residential park	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Student accommodation	0.3 spaces per bed.
Workers' accommodation	0.5 spaces per bed plus 0.2 spaces per bed for visitor parking.
Tourist	
Caravan park / tourist park	Parks with 100 sites or less - a minimum of 1 space per 10 sites to be used for accommodation.
	Parks with more than 100 sites - a minimum of 1 space per 15 sites used for accommodation.
	A minimum of 1 space for every caravan (permanently fixed to the ground) or cabin.
Tourist accommodation	1 car parking space per accommodation unit / guest room.
Commercial Uses	
Auction room/ depot	1 space per 100m ² of building floor area plus an additional 2 spaces.
Automotive collision repair	3 spaces per service bay.
Call centre	8 spaces per 100m ² of gross leasable floor area.
Motor repair station	3 spaces per service bay.
Office	4 spaces per 100m ² of gross leasable floor area.

Page 123 of 133 Printed on 1/02/2022

Retail fuel outlet	3 spaces per 100m ² gross leasable floor area.
Service trade premises	2.5 spaces per 100m ² of gross leasable floor area
	1 space per 100m ² of outdoor area used for display purposes.
Shop (no commercial kitchen)	5.5 spaces per 100m ² of gross leasable floor area where not located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
	5 spaces per 100m ² of gross leasable floor area where located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
Shop (in the form of a bulky goods outlet)	2.5 spaces per 100m ² of gross leasable floor area.
Shop (in the form of a restaurant or involving a commercial kitchen)	Premises with a dine-in service only (which may include a take-away component with no drive-through) - 0.4 spaces per seat.
	Premises with take-away service but with no seats - 12 spaces per 100m ² of total floor area plus a drive-through queue capacity of ten vehicles measured from the pick-up point.
	Premises with a dine-in and drive-through take-away service - 0.3 spaces per seat plus a drive through queue capacity of 10 vehicles measured from the pick-up point.
Community and Civic Uses	
Childcare centre	0.25 spaces per child
Library	4 spaces per 100m ² of total floor area.
Community facility	10 spaces per 100m ² of total floor area.
Hall / meeting hall	0.2 spaces per seat.
Place of worship	1 space for every 3 visitor seats.
Pre-school	1 per employee plus 0.25 per child (drop off/pick up bays)
Educational establishment	For a primary school - 1.1 space per full time equivalent employee plus 0.25 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a secondary school - 1.1 per full time equivalent employee plus 0.1 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.

Page 124 of 133 Printed on 1/02/2022

For a tertiary institution - 0.4 per student based on the maximum number of students on the site at any time.
4.5 spaces per bed for a public hospital.
1.5 anacco per had for a private hagnital
1.5 spaces per bed for a private hospital.
4 spaces per consulting room excluding ancillary facilities.
0.2 spaces per seat.
0.2 spaces per seat.
1 space for every 2m ² of total floor area in a public bar plus 1 space for every 6m ² of total floor area available to the public in a lounge, beer garden plus 1 space per 2 gaming machines, plus 1 space per 3 seats in a restaurant.
6.5 spaces per 100m ² of total floor area for a Fitness Centre
4.5 spaces per 100m ² of total floor area for all other Indoor recreation facilities.
1.5 spaces per 100m ² total floor area
1 spaces per 100m ² of outdoor area used for fuel depot activity purposes.
1.5 spaces per 100m ² of total floor area.
0.5 spaces per 100m ² of total floor area.
1.5 spaces per 100m ² of total floor area
1 space per 100m ² of outdoor area used for display purposes.
0.5 spaces per 100m ² total floor area.
1 space per 5 seats in the chapel plus 1 space for each vehicle operated by the parlour.
5 spaces per 100m ² of total building floor area.

Page 125 of 133 Printed on 1/02/2022

Table 2 - Off-Street Car Parking Requirements in Designated Areas

The following parking rates apply in any zone, subzone or other area described in the 'Designated Areas' column subject to the following:

- (a) the location of the development is unable to satisfy the requirements of Table 2 Criteria (other than where a location is exempted from the application of those criteria)
- (b) the development satisfies Table 2 Criteria (or is exempt from those criteria) and is located in an area where a lawfully established carparking fund operates, in which case the number of spaces are reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.		Designated Areas
	Minimum number of spaces	Maximum number of spaces	
Development generally			
All classes of development	No minimum.	No maximum except in the Primary Pedestrian Area identified in the Primary Pedestrian Area Concept Plan, where the maximum is: 1 space for each dwelling with a total floor area less than 75 square metres 2 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres 3 spaces for each dwelling with a total floor area greater than 150 square metres. Residential flat building or Residential component of a multi-storey building: 1 visitor space for each 6 dwellings.	Capital City Zone City Main Street Zone City Riverbank Zone Adelaide Park Lands Zone Business Neighbourhood Zone (within the City of Adelaide) The St Andrews Hospital Precinct Subzone and Women's and Children's Hospital Precinct Subzone of the Community Facilities Zone
Non-residential develop	ment		
Non-residential development excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area.	5 spaces per 100m ² of gross leasable floor area.	City Living Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone

Page 126 of 133 Printed on 1/02/2022

			Urban Neighbourhood Zone
Non-residential development excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area.	6 spaces per 100m ² of gross leasable floor area.	Strategic Innovation Zone Suburban Activity Centre Zone Suburban Business Zone Business Neighbourhood Zone Suburban Main Street Zone Urban Activity Centre Zone
Tourist accommodation	1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5 bedrooms over 100 bedrooms	1 space per 2 bedrooms up to 100 bedrooms and 1 space per 4 bedrooms over 100 bedrooms	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential development	t		
Residential component of a multi-storey building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Strategic Innovation Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential flat building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone

Page 127 of 133 Printed on 1/02/2022

Table 2 - Criteria:

The following criteria are used in conjunction with Table 2. The 'Exception' column identifies locations where the criteria do not apply and the car parking rates in Table 2 are applicable.

Criteria	Exceptions
The designated area is wholly located within Metropolitan Adelaide and any part of the development site satisfies one or more of the following:	 (a) All zones in the City of Adelaide (b) Strategic Innovation Zone in the following locations: (i) City of Burnside (ii) City of Marion (iii) City of Mitcham
 (a) is within 200 metres of any section of road reserve along which a bus service operates as a high frequency public transit service⁽²⁾ (b) is within 400 metres of a bus interchange⁽¹⁾ (c) is within 400 metres of an O-Bahn interchange⁽¹⁾ (d) is within 400 metres of a passenger rail station⁽¹⁾ (e) is within 400 metres of a passenger tram station⁽¹⁾ (f) is within 400 metres of the Adelaide Parklands. 	 (c) Urban Corridor (Boulevard) Zone (d) Urban Corridor (Business) Zone (e) Urban Corridor (Living) Zone (f) Urban Corridor (Main Street) Zone (g) Urban Neighbourhood Zone

[NOTE(S): (1)Measured from an area that contains any platform(s), shelter(s) or stop(s) where people congregate for the purpose waiting to board a bus, tram or train, but does not include areas used for the parking of vehicles. (2) A high frequency public transit service is a route serviced every 15 minutes between 7.30am and 6.30pm Monday to Friday and every 30 minutes at night, Saturday, Sunday and public holidays until 10pm.]

Table 3 - Off-Street Bicycle Parking Requirements

The bicycle parking rates apply within designated areas located within parts of the State identified in the Schedule to Table 3.

Class of Development	Bicycle Parking Rate Where a development comprises more than one development type, then the overall bicycle parking rate will be taken to be the sum of the bicycle parking rates for each development type.
Consulting Room	1 space per 20 employees plus 1 space per 20 consulting rooms for customers.
Educational establishment	For a secondary school - 1 space per 20 full-time time employees plus 10 percent of the total number of employee spaces for visitors. For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students.
Hospital	1 space per 15 beds plus 1 space per 30 beds for visitors.
Indoor recreation facility	1 space per 4 employees plus 1 space per 200m ² of gross leasable floor area for visitors.

Page 128 of 133 Printed on 1/02/2022

Licensed Premises	1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area.
Office	1 space for every 200m ² of gross leasable floor area plus 2 spaces plus 1 space per 1000m ² of gross leasable floor area for visitors.
Pre-school	1 space per 20 full time employees plus 1 space per 40 full time children.
Recreation area	1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers.
Residential flat building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors.
Residential component of a multi-storey building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors.
Shop	1 space for every 300m ² of gross leasable floor area plus 1 space for every 600m ² of gross leasable floor area for customers.
Tourist accommodation	1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.

Schedule to Table 3

Designated Area	Relevant part of the State
	The bicycle parking rate applies to a designated area located in a relevant part of the State described below.
All zones	City of Adelaide
Business Neighbourhood Zone	Metropolitan Adelaide
Strategic Innovation Zone	
Suburban Activity Centre Zone	
Suburban Business Zone	
Suburban Main Street Zone	
Urban Activity Centre Zone	
Urban Corridor (Boulevard) Zone	
Urban Corridor (Business) Zone	
Urban Corridor (Living) Zone	

Page 129 of 133 Printed on 1/02/2022

Urban Corridor (Main Street) Zone	
Urban Neighbourhood Zone	

Waste Treatment and Management Facilities

Assessment Provisions (AP)

Desired Outcome		
DO 1	Mitigation of the potential environmental and amenity impacts of waste treatment and management facilities.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
	Siting
PO 1.1	DTS/DPF 1.1
Waste treatment and management facilities incorporate separation distances and attenuation measures within the site between waste operations areas (including all closed, operating and future cells) and sensitive receivers and sensitive environmental features to mitigate off-site impacts from noise, air and dust emissions.	None are applicable.
Soil and	Nater Protection
PO 2.1	DTS/DPF 2.1
Soil, groundwater and surface water are protected from contamination from waste treatment and management facilities through measures such as: (a) containing potential groundwater and surface water contaminants within waste operations areas	None are applicable.
(b) diverting clean stormwater away from waste operations areas and potentially contaminated areas	
(c) providing a leachate barrier between waste operations areas and underlying soil and groundwater.	
PO 2.2	DTS/DPF 2.2
Wastewater lagoons are set back from watercourses to minimise environmental harm and adverse effects on water resources.	Wastewater lagoons are set back 50m or more from watercourse banks.
PO 2.3	DTS/DPF 2.3
Wastewater lagoons are designed and sited to:	None are applicable.

Page 130 of 133 Printed on 1/02/2022

(a) avoid intersecting underground waters;		
(b) avoid inundation by flood waters;		
(c) ensure lagoon contents do not overflow;		
(d) include a liner designed to prevent leakage.		
PO 2.4	DTS/DPF 2.4	
Waste operations areas of landfills and organic waste processing	Waste operations areas are set back 100m or more from	
facilities are set back from watercourses to minimise adverse	watercourse banks.	
impacts on water resources.		
Δ	noite.	
	enity	
PO 3.1	DTS/DPF 3.1	
Waste treatment and management facilities are screened, located	None are applicable.	
and designed to minimise adverse visual impacts on amenity.		
PO 3.2	DTS/DPF 3.2	
Access routes to waste treatment and management facilities via	None are applicable.	
residential streets is avoided.		
PO 3.3	DTS/DPF 3.3	
Litter control measures minimise the incidence of windblown litter.	None are applicable.	
PO 3.4	DTS/DPF 3.4	
Waste treatment and management facilities are designed to	None are applicable.	
minimise adverse impacts on both the site and surrounding areas		
from weed and vermin infestation.		
Acc	eess	
PO 4.1	DTS/DPF 4.1	
Traffic circulation movements within any waste treatment or	None are applicable.	
management site are designed to enable vehicles to enter and exit		
the site in a forward direction.		
PO 4.2	DTS/DPF 4.2	
Suitable access for emergancy vahicles is provided to and within	None are applicable	
Suitable access for emergency vehicles is provided to and within waste treatment or management sites.	None are applicable.	
Trade a dual for the head of the head.		
Fencing a	nd Security	
PO 5.1	DTS/DPF 5.1	
 Security fencing provided around waste treatment and management	Chain wire mesh or pre-coated painted metal fencing 2m or more	
facilities prevents unauthorised access to operations and potential	in height is erected along the perimeter of the waste treatment or	
hazard to the public.	waste management facility site.	
	150	
Landfill		
PO 6.1	DTS/DPF 6.1	
Landfill gas emissions are managed in an environmentally	None are applicable.	
acceptable manner.		
PO 6.2	DTS/DPF 6.2	
Landfill facilities are separated from areas of environmental	Landfill facilities are set back 250m or more from a public open	
significance and land used for public recreation and enjoyment.	space reserve, forest reserve, national park or Conservation Zone.	
, , , , , , , , , , , , , , , , , , , ,	1 ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '	

Page 131 of 133 Printed on 1/02/2022

Policy24 - Enquiry	
PO 6.3	DTS/DPF 6.3
Landfill facilities are located on land that is not subject to land slip.	None are applicable.
PO 6.4	DTS/DPF 6.4
Landfill facilities are separated from areas subject to flooding.	Landfill facilities are set back 500m or more from land inundated in
	a 1% AEP flood event.
Organic Waste Pr	I ocessing Facilities
PO 7.1	DTS/DPF 7.1
Organic waste processing facilities are separated from the coast to	Organic waste processing facilities are set back 500m or more
avoid potential environment harm.	from the coastal high water mark.
PO 7.2	DTS/DPF 7.2
Organic waste processing facilities are located on land where the	None are applicable.
engineered liner and underlying seasonal water table cannot intersect.	
PO 7.3	DTS/DPF 7.3
Organic waste processing facilities are sited away from areas of	Organic waste processing facilities are set back 250m or more
environmental significance and land used for public recreation and	from a public open space reserve, forest reserve, national park or a
enjoyment.	Conservation Zone.
PO 7.4	DTS/DPF 7.4
Organic waste processing facilities are located on land that is not	None are applicable.
subject to land slip.	
PO 7.5	DTS/DPF 7.5
Organic waste processing facilities separated from areas subject to	Organic waste processing facilities are set back 500m or more
flooding.	from land inundated in a 1% AEP flood event.
Major Wastewater	Treatment Facilities
PO 8.1	DTS/DPF 8.1
Major wastewater treatment and disposal systems, including	None are applicable.
lagoons, are designed to minimise potential adverse odour impacts	
on sensitive receivers, minimise public and environmental health	
risks and protect water quality.	
PO 8.2	DTS/DPF 8.2
Artificial wetland systems for the storage of treated wastewater are	None are applicable.
designed and sited to minimise potential public health risks arising	
from the breeding of mosquitoes.	
	1

Workers' accommodation and Settlements

Assessment Provisions (AP)

Desired Outcome

Page 132 of 133 Printed on 1/02/2022

DO 1

Appropriately designed and located accommodation for seasonal and short-term workers in rural areas that minimises environmental and social impacts.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Workers' accommodation and settlements are obscured from scenic routes, tourist destinations and areas of conservation significance or otherwise designed to complement the surrounding landscape.	None are applicable.
PO 1.2	DTS/DPF 1.2
Workers' accommodation and settlements are sited and designed to minimise nuisance impacts on the amenity of adjacent users of land.	None are applicable.
PO 1.3	DTS/DPF 1.3
Workers' accommodation and settlements are built with materials and colours that blend with the landscape.	None are applicable.
PO 1.4	DTS/DPF 1.4
Workers' accommodation and settlements are supplied with service infrastructure such as power, water and effluent disposal sufficient to satisfy the living requirements of workers.	None are applicable.

No criteria applies to this land use. Please check the definition of the land use for further detail.

Page 133 of 133 Printed on 1/02/2022